

# MID FLORIDA DIESEL



2215 HIGHWAY 60 EAST  
BARTOW, FL. 33830  
**(863) 519-0107    FAX (863) 519-0109**  
WWW.MIDFLORIDADIESEL.COM

## **Bill of Material For Florida Sheriff Association Item #131 - 500KW GENERATOR PACKAGE**

**Gillette Generators    MODEL: (Qty. - 1) SPVD-5000**

**GENERATOR: 500 kW, 625 kVA**  
**VOLTAGE:        480 volt Three-Phase**  
**Engine Model: Volvo TAD1641GE 500kW Standby Power Rating at 1800 RPM**

**Selected Model Features Included:**

Isochronous Governor + / - .25%  
UL2200  
EPA Tier II Certified  
130 Degree Temperature Rise

**Voltage: 480/277V 3 PH**

**Gen Model:** Marathon 572RSL4027 12 Lead Wired 480V 3 Phase High Wye 130°C Rise Over 27°C Ambient  
**Voltage Regulator:** Marathon DVR2000E+ Digital Voltage Regulator with PMG Excitation

**CONTROL PANEL: Deep Sea 7420 digital microprocessor**

**Controller Features:**

- STOP-MANUAL-AUTO modes and automatic engine shutdowns, signaled by full text LCD indicators:
- Low oil pressure \_ Engine fail to start
- High engine temp \_ Engine over speed
- Low Radiator Level \_ Engine under speed
- Three auxiliary alarms \_ Over & under voltage
- Battery fail alarm
- Also included is tamper-proof engine hour meter

**ENCLOSURE: WEATHER SOUND PROOF ALUMINUM HOUSING CORROSION RESISTANT PROTECTION**

Sound Attenuated Enclosures- high performance sound attenuating foam  
Separated frontal exhaust chamber and dual side air intake baffles  
9 Heated And Agitated Wash Stages  
Zinc Phosphate Etching-coating Stage  
Final Baked On Enamel Powder Coat  
18/8 Stainless Steel Hardware  
Sound Attenuation Foam, 1 ½ inches  
180mph Wind Load Rated

**Enclosure Options:**

- Cooling:** Unit Mounted Radiator (50°C Ambient)
- Coolant Drain Extension:** Plumbed to Bulkhead Fitting in Base
- Oil Drain Extension:** Plumbed to Bulkhead Fitting in Base

**Mainline Breaker:** 800 Amp 3 Pole 600 Volt Breaker Mounted & Wired in a NEMA 1 Enclosure

**Jacket Water Heater:** Engine Block Heater 5000W 240VAC Rated for -20°F  
Heater Installed with Isolation Valves and Wired to Terminal

**Air Cleaner:** Dry Single Stage

**Air Restrictor Indicator:** Installed in Air Filtration System

**Silencer:** Critical Grade Compact (CPJ Series) Silencer Mounted to Engine

**Battery:** 24 Volt System with Rack and Cables

**Battery Charger:** 24 Volt 5 Amp Mounted and Wired to Terminal

**Fuel Tank:** 26 Hour / 958 Gallon UL 142 Listed Sub-Base Fuel Tank with Stub-up Area  
Double Wall Construction with Secondary Containment Standard  
Includes: Supply & Return Connections, Fuel Level Gauge, Fuel Leak Switch and Fill & Vent Plumbing

**Factory Test:** Standard Commercial Testing Includes:  
Verification of Alarm Shutdowns, Voltage Settings, Block Loading to Rated kW and PF

**Owner's Manual:** Print Copy (Qty 1) **Standard**

**Warranty:** 2 Year / 2000 Hour Limited

**MISCELLANEOUS:**

Certified Factory Test

Test Acceptance Run by Factory Trained Representative (Start Up)



# GILLETTE GENERATORS

## LIQUID COOLED DIESEL ENGINE GENERATOR SET

| Model                     | HZ | STANDBY<br>120°C RISE |
|---------------------------|----|-----------------------|
| <b>SPVD-5000-60 HERTZ</b> | 60 | 500                   |



All generator sets are USA prototype built and thoroughly tested. Production models are USA factory built and 100% load tested.



**UL2200, UL1446, UL508, UL142, UL498**



**NFPA 110, 99, 70, 37**

All generator sets meet NFPA-110 Level 1, when equipped with the necessary accessories and installed per NFPA standards.



**NEC 700, 701, 702, 708**



**NEMA ICS10, MG1, ICS6, AB1**



**ANSI C62.41, 27, 59, 32, 480, 40Q, 81U, 360-05**




**ASCE 7-05 & 7-10**

All generator sets meet 180 MPH rating.




**EPA 40CFR Part 60, 1048, 1054, 1065, 1068**

## 60 HZ MODEL **SPVD-5000**

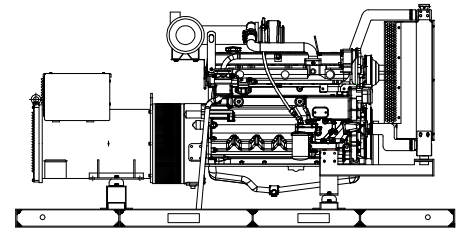

### "OPEN" GEN-SET

There is ~~no~~ enclosure, so gen-set must be placed within a weather protected area, uninhabited by humans or animals, with proper ventilation. Silencer ~~not~~ supplied, as installation requirements are not known. However, ~~this~~ item is available as optional equipment.

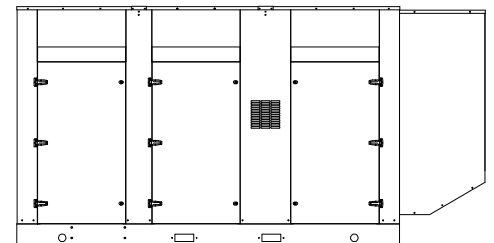

### "LEVEL 2" HOUSED GEN-SET

Full aluminum weather protection and superior sound attenuation for specific low noise applications. Critical grade muffler is standard.

## GENERATOR RATINGS

| GENERATOR MODEL      | VOLTAGE    |            | PH       | HZ        | 120°C RISE STANDBY RATING |            | POWER LEAD CONNECTIONS  |
|----------------------|------------|------------|----------|-----------|---------------------------|------------|-------------------------|
|                      | L-N        | L-L        |          |           | KW/KVA                    | AMP        |                         |
| SPVD-5000-3-2        | 120        | 208        | 3        | 60        | 500/625                   | 1736       | 12 LEAD LOW WYE         |
| SPVD-5000-3-3        | 120        | 240        | 3        | 60        | 500/625                   | 1505       | 12 LEAD HIGH DELTA      |
| <b>SPVD-5000-3-4</b> | <b>277</b> | <b>480</b> | <b>3</b> | <b>60</b> | <b>500/625</b>            | <b>752</b> | <b>12 LEAD HIGH WYE</b> |
| SPVD-5000-3-5        | 127        | 220        | 3        | 60        | 500/625                   | 1642       | 12 LEAD LOW WYE         |
| SPVD-5000-3-16       | 346        | 600        | 3        | 60        | 500/625                   | 602        | 4 LEAD HIGH WYE         |

RATINGS: All single phase gen-sets are dedicated 4 lead windings, rated at unity (1.0) power factor. All three phase gen-sets are 12 lead windings, rated at .8 power factor. 120° C "STANDBY RATINGS" are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based 120°C (standby) R/R winding temperature, within a maximum 40°C ambient condition. Generators operated at standby power ratings must not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.

# APPLICATION & ENGINEERING DATA FOR MODEL SPVD-5000-60 HZ

## GENERATOR SPECIFICATIONS

Manufacturer.....Stamford Electric Generators  
Model & Type..... HCI534E-311, 4 Pole, 12 Lead, Three Phase  
..... **HCI534D-311, 4 Pole, 12 Lead, 480V, Three Phase**  
..... HCI534D-17, 4 Pole, 6 Lead, 600V, Three Phase  
Exciter.....Brushless, shunt excited  
Voltage Regulator.....Solid State, HZ/Volts  
Voltage Regulation.....½%, No load to full load  
Frequency.....Field convertible, 60 HZ to 50 HZ  
Frequency Regulation.....± ½% (1/2 cycle, no load to full load)  
Unbalanced Load Capability.....100% of standby amps  
One Step Load Acceptance.....100% of nameplate rating  
Total Stator and Load Insulation.....Class H, 180°C  
Temperature Rise.....120°C R/R, standby rating @ 40°C amb.  
3 Ø Motor Starting @ 30% Voltage Dip (208-240V)...1340 kVA  
3 Ø Motor Starting @ 30% Voltage Dip (480V).....1750 kVA  
3 Ø Motor Starting @ 30% Voltage Dip (600V).....1520 kVA  
Bearing.....1, Pre-lubed and sealed  
Coupling.....Direct flexible disc.  
Total Harmonic Distortion.....Max 3½% (MIL-STD705B)  
Telephone Interference Factor.....Max 50 (NEMA MG1-22)  
Deviation Factor.....Max 5% (MIL-STD 405B)  
Alternator.....Self ventilating and drip-proof  
Ltd. Warranty Period.....24 Months from start-up date or  
.....1000 hours use, first to occur.

## GENERATOR FEATURES

- World Renown Stamford Electric Generator having UL-1446 certification.
- Full generator protection with **Deep Sea 7420** controller, having UL-508 certification.
- Automatic voltage regulator with over-excitation, under-frequency compensation, under-speed protection, and EMI filtering. Entire solid-state board is encapsulated for moisture protection.
- Generator power ratings are based on temperature rise, measured by resistance method, as defined in MIL-STD 705C and IEEE STD 115, Method 6.4.4.
- Power ratings will not exceed temperature rise limitation for class H insulation as per NEMA MG1-22.40.
- Insulation resistance to ground, exceeds 1.5 meg-ohm.
- Stator receives 2000 V. hi-potential test on main windings, and rotor windings receive a 1500 V. hi-potential test, as per MIL-STD 705B.
- Full amortisseur windings with UL-1446 certification.
- Complete engine-generator torsional acceptance, confirmed during initial prototype testing.
- Full load testing on all engine-generator sets, before shipping.

## ENGINE SPECIFICATIONS AND APPLICATIONS DATA

### ENGINE

Manufacturer.....VOLVO-PENTA  
Model and Type.....TAD1641GE, 4 cycle, liquid Cooled  
Aspiration.....Turbo After Cooler, Air to Air  
Charged Air Cooled System.....Air to Air  
Cylinder Arrangement.....6 Cylinders, In-Line  
Displacement Cu. In. (Liters).....984 (16.1)  
Bore & Stroke in (Cm).....5.67 x 6.50 (14.4 x 16.5)  
Compression Ratio.....16.5:1  
Main Bearings.....Tin Overlay with Babbit Backing  
Cylinder Head.....Cast Iron with overhead Cam  
Pistons.....Aluminum Alloy with Graphite Coating  
Crankshaft.....Induction Hardened, Heat Treated Forged  
Valves.....Heat Treated and Hardened Exhaust Valve  
Governor.....Electronic, EMS 2.2  
Frequency Regulation.....± 1/4%  
Air Cleaner.....Dry, Replaceable Cartridge  
Engine Speed.....1800 rpm  
Max Power, bhp (kwm) Standby.....685 (504)  
BMEP: psi (MPa) Standby.....302 (2.1)  
Ltd. Warranty Period.....2 Year or 1000 hrs, first to occur

### FUEL SYSTEM

Type.....Diesel Fuel Oil (ASTM No. 2-D)  
Combustion System.....Direct Injection  
Fuel Injection Pump.....Electronic, Delphi E3  
24 VDC Coolant heaters.....Optional Equipment  
Fuel Filter.....Yes with Water Separator

### FUEL CONSUMPTION

| GAL/HR (LITER/HR) | STANDBY      |
|-------------------|--------------|
| 100% LOAD         | 36.8 (139.3) |
| 75% LOAD          | 26.8 (101.4) |
| 50% LOAD          | 18.0 (68.1)  |

### OIL SYSTEM

Type.....Full Pressure  
Oil Pan Capacity qt. (L).....50.7 (48)  
Oil Pan Cap. W/ filter qt. (L).....44.3 (42)  
Oil Filter.....3, Replaceable Cartridge type

### ELECTRICAL SYSTEM

Ignition System.....Electronic  
Eng. Alternator/Starter: 24 VDC, negative ground, 80 amp/hr.

Recommended battery to -18°C (0° F): ....(2) 12 VDC, BCI# 31,  
Max. Dimensions: 14"lg x 6 3/4" wi x 10" hi, with standard  
round posts. Min output 1000 CCA. Battery tray (max. dim. at  
15"lg x 7"wi). This model has (2) battery trays, (2) hold down  
straps, (2) sets of battery cables, and (1) battery charger.  
Installation of (2) 12VDC starting batteries connected in series  
for 24VDC output is required, with possible higher AMP/HR  
rating, as described above, if the normal environment  
temperature averages -13° F (-25°C) or cooler.

### CERTIFICATIONS

All engines are EPA emissions certified. All emergency  
stationary diesel engines are Tier II compliant.

# APPLICATION & ENGINEERING DATA FOR MODEL SPVD-5000-60 HZ

## COOLING SYSTEM

|                                                                                                  |                                |
|--------------------------------------------------------------------------------------------------|--------------------------------|
| Type of System .....                                                                             | Air to Air, Charged Air Cooler |
| Coolant Pump .....                                                                               | Pre-lubricated, self-sealing   |
| Cooling Fan Type .....                                                                           | Pusher                         |
| Fan Diameter inches (cm) .....                                                                   | 35.1 (89)                      |
| Fan drive ratio .....                                                                            | 1.04:1                         |
| Ambient Capacity of Radiator °F (°C) .....                                                       | 131 (55)                       |
| Engine Jacket Coolant Capacity gal. (L) .....                                                    | 8.70 (33)                      |
| Radiator Coolant Capacity gal. (L) .....                                                         | 16.0 (60)                      |
| Water Pump Capacity gpm (L/min) .....                                                            | 122 (462)                      |
| Heat Reject Coolant: Btu/min .....                                                               | 13,137                         |
| Air to Air Heat Reject, BTU/min. ....                                                            | 7,109                          |
| Heat Radiated to Ambient, BTU/min .....                                                          | 3,700                          |
| Low Radiator Coolant Level Shutdown .....                                                        | Standard                       |
| Note: Coolant temp. shut-down switch setting at 228°F (109°C) with 50/50 (water/antifreeze) mix. |                                |

## COOLING AIR REQUIREMENTS

|                                                        |              |
|--------------------------------------------------------|--------------|
| Combustion Air cfm (m <sup>3</sup> /min) .....         | 1,617 (45.8) |
| Max Air Intake Restrictions:                           |              |
| Clean Air Cleaner, KPA (psi) .....                     | 5 (1.5)      |
| Radiator Cooling Air, SCFM (m <sup>3</sup> /min) ..... | 24,175 (684) |

## EXHAUST SYSTEM

|                                                            |            |
|------------------------------------------------------------|------------|
| Exhaust Outlet Size .....                                  | 8"         |
| Max. Back Pressure in KPA (in. H <sub>2</sub> O) .....     | 10 (40)    |
| Exhaust Flow, at rated KW, CFM (m <sup>3</sup> /min) ..... | 3899 (110) |
| Exhaust Temp, (Stack) °F (°C) .....                        | 893 (479)  |

## SOUND LEVELS MEASURED IN dB(A)

|                                  | Open<br>Set | Level 2<br>Encl. |
|----------------------------------|-------------|------------------|
| Level 2, Critical Silencer ..... | 94          | 81               |
| Level 3, Hospital Silencer ..... | 89          | 75               |

Note: Open sets (no enclosure) have optional silencer system choices due to unknown job-site applications. Level 2 enclosure has installed critical silencer with upgrade to Level 3 hospital silencer. Sound tests are averaged from several test points and taken at 23 ft. (7 m) from source of noise at normal operation.

## DERATE GENERATOR FOR ALTITUDE

3% per 1000 ft.(305m) above 3000 ft. (914m) from sea level

## DERATE GENERATOR FOR TEMPERATURE

2% per 10°F(5.6°C) above 104°F (40°C)

## DIMENSIONS AND WEIGHTS

|                                | Open<br>Set | Level 2<br>Enclosure |
|--------------------------------|-------------|----------------------|
| Length in (cm) .....           | 152 (368)   | 186 (472)            |
| Width in (cm) .....            | 72 (183)    | 72 (183)             |
| Height in (cm) .....           | 80 (203)    | 94 (239)             |
| 3 Ø Net Weight lbs (kg) .....  | 8700 (3946) | 11200 (5080)         |
| 3 Ø Ship Weight lbs (kg) ..... | 9050 (4105) | 11500 (5216)         |

# DEEP SEA 7420 DIGITAL MICROPROCESSOR CONTROLLER



### Deep Sea 7420

The “7420” controller is an auto start mains (utility) failure module for single gen-set applications. This controller includes a backlit LCD display which continuously displays the status of the engine and generator at all times.

The “7420” controller will also monitor speed, frequency, voltage, current, oil pressure, coolant temp., and fuel levels. These modules have been designed to display warning and shut down status. It also includes: (11) configurable inputs • (8) configurable outputs • voltage monitoring • mains (utility) failure detection • (250) event logs • configurable timers • automatic shutdown or warning during fault detection • remote start (on load) • engine preheat • advanced metering capability • hour meter • text LCD displays • protected solid state outputs • test buttons for: stop/reset • manual mode • auto mode • lamp test • start button • power monitoring (kWh, kVAr, kVAh, kVArh)

This controller includes expansion features including RS232, RS484 (using MODBUS-RTU/TCP), direct USB connection with PC, expansion optioned using DSENet for remote annunciation and remote relay interfacing for a distance of up to 3300FT. The controller software is freely downloadable from the internet and allows monitoring with direct USB cable, LAN, or by internet via the built in web interface.



Further expansion is available by adding the optional “WebNet” gateway interface module. This device will allow comprehensive monitoring of the generator via the cloud including identification, location, and status. Some advantages of this module include: reduced site visits and maintenance costs • remote fuel management • fault analysis • asset tracking • automatic system alerts • maximized system up-time.

# STANDARD FEATURES FOR MODEL SPVD-5000-60 HZ

## STANDARD FEATURES

### CONTROL PANEL:

Deep Sea 7420 digital microprocessor with logic allows programming in the field. Controller has:

- STOP-MANUAL-AUTO modes and automatic engine shutdowns, signaled by full text LCD indicators:
- Low oil pressure
- High engine temp
- Low Radiator Level
- Three auxiliary alarms
- Battery fail alarm
- Engine fail to start
- Engine over speed
- Engine under speed
- Over & under voltage

Also included is tamper-proof engine hour meter

### ENGINE:

Fuel filter • Full flow Oil filter • Air filter • Fuel pump • Oil pump • Solenoid type starter motor • Hi-temp radiator • Jacket water pump • Thermostat • Pusher fan and guard • Exhaust manifold • Electronic Governor • 24 VDC battery charging alternator • Flexible fuel and exhaust connectors • Vibration isolators • Open coolant recovery system with 50/50 water to anti-freeze mixture • flexible oil & radiator hose • Shut-down sensors for low oil pressure, high coolant temp., low coolant level, high ambient temp.

Design & specifications subject to change without prior notice. Dimensions shown are approximate. Contact Gillette for certified drawings. DO NOT USE DIMENSIONS FOR INSTALLATION PURPOSES.

### AC GENERATOR SYSTEM:

AC generator • Shunt excited • Brushless design • Circuit Breaker installed and wired to gen-set • Direct connection to engine with flex disc • Class H, 180°C insulation • Self ventilated • Drip proof construction • UL Certified

### VOLTAGE REGULATOR:

1% Voltage regulation • EMI filter • Under-speed protection • Over-excitation protection • total encapsulation





### DC ELECTRICAL SYSTEM:

Battery trays • Battery cables • Battery hold down straps • 3-stage battery charger with float, absorption, & bulk automatic charge stages

### WEATHER / SOUNDPROOF ALUMINUM HOUSING:

Corrosion Resistant Protection consisting of:

- (9) Heated and Agitated Wash Stages
- Zinc Phosphate Etching-Coating Stage
- Final Baked on Enamel Powder Coat
- 18/8 Stainless Steel Hardware

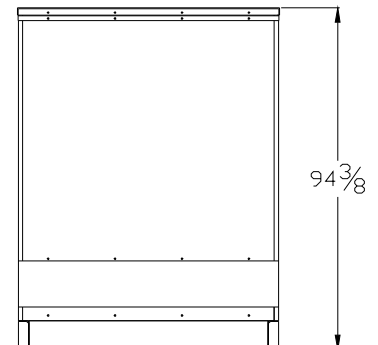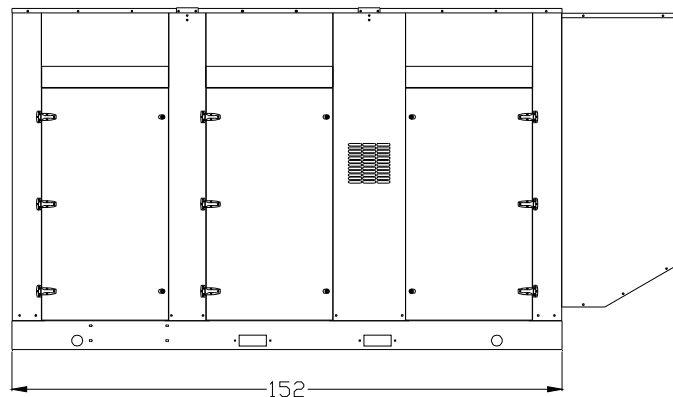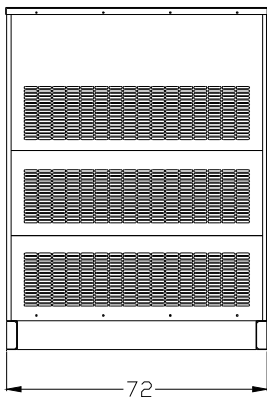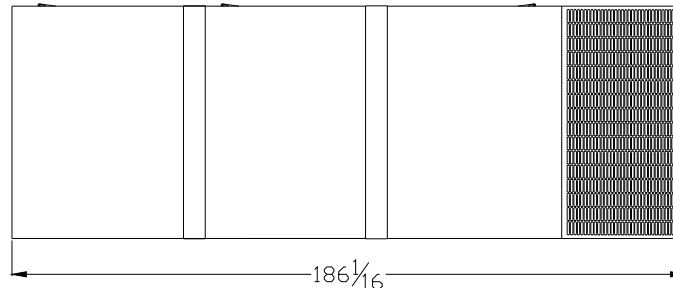

# VOLVO PENTA GENSET ENGINE

# TAD1641GE

484 kW (658 hp) at 1500 rpm, 565 kW (768 hp) at 1800 rpm, acc. to ISO 3046

The TAD1641GE is a powerful, reliable and economical Generating Set Diesel Engine built on the dependable in-line six design.

## Durability & low noise

Designed for easiest, fastest and most economical installation. Well-balanced to produce smooth and vibration-free operation with low noise level.

To maintain a controlled working temperature in cylinders and combustion chambers, the engine is equipped with piston cooling. The engine is also fitted with replaceable cylinder liners and valve seats/guides to ensure maximum durability and service life of the engine.

## Low exhaust emission

The state of the art, high-tech injection and charging system with low internal losses contributes to excellent combustion and low fuel consumption.

The TAD1641GE complies with EU Stage 2 exhaust emission regulations.

## Easy service & maintenance

Easily accessible service and maintenance points contribute to the ease of service of the engine.


## Technical description

### Engine and block

- Optimized cast iron cylinder block with optimum distribution of forces without the block being unnecessary heavy.
- Wet, replaceable cylinder liners
- Piston cooling for low thermal load on pistons and reduced ring temperature
- Tapered connecting rods to reduce risk of piston cracking
- Crankshaft induction hardened bearing surfaces and fillets with seven main bearings for moderate load on main and big-end bearings
- Nitrocarburized transmission gears for heavy duty operation
- Keystone top compression rings for long service life
- Viscous type crankshaft vibration damper
- Replaceable valve guides and valve seats
- Over head camshaft and four valves per cylinder equipped with camshaft damper to reduce noise and vibrations.

### Lubrication system

- Full flow oil cooler
- Full flow disposable spin-on oil filters, for extra high filtration
- The lubricating oil level can be measured during operation (Standard dipstick only)
- Gear type lubricating oil pump, gear driven by the transmission

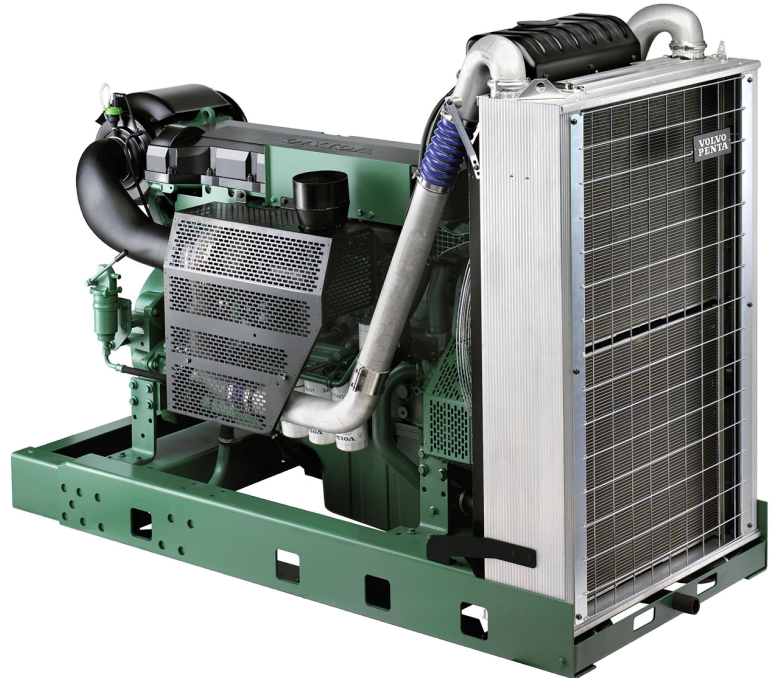

### Features

- Fully electronic with Volvo Penta EMS 2
- Dual frequency switch (between 1500 rpm and 1800 rpm)
- High power density
- Emission compliant
- Low noise levels
- Gen Pac configuration

### Fuel system

- Self de-aerating system. When replacing filters all fuel stays in the engine.
- Non-return fuel valve
- Electronic unit injectors
- Fuel prefilter with water separator and water-in-fuel indicator / alarm
- Gear driven low-pressure fuel pump
- Fine fuel filter with manual feed pump and fuel pressure switch
- Fuel shut-off valve, electrically operated

### Cooling system

- Efficient cooling with accurate coolant control through a water distribution duct in the cylinder block. Reliable sleeve thermostat with minimum pressure drop
- Belt driven, maintenance-free coolant pump with high degree of efficiency

### Turbo charger

- Efficient and reliable turbo charger
- Extra oil filter for the turbo charger

### Electrical system

- Engine Management System 2 (EMS 2), an electronically controlled processing system which optimizes engine performance. It also includes advanced facilities for diagnostics and fault tracing
- The instruments and controls connect to the engine via the CAN SAE J1939 interface, either through the Control Interface Unit (CIU) or the Digital Control Unit (DCU). The CIU converts the digital CAN bus signal to an analog signal, making it possible to connect a variety of instruments. The DCU is a control panel with display, engine control, monitoring, alarm, parameter setting and diagnostic functions. The DCU also presents error codes in clear text.
- Sensors for oil pressure, oil temp, boost pressure, boost temp, coolant temp, fuel temp, water in fuel, fuel pressure and two speed sensors. Crank case pressure, piston cooling pressure, oil level and air filter pressure drop sensors.
- Alternator 24V / 80A


**VOLVO  
PENTA**



# STAMFORD<sup>®</sup>

**HCI 534E/544E - Winding 311**

Technical  Data Sheet

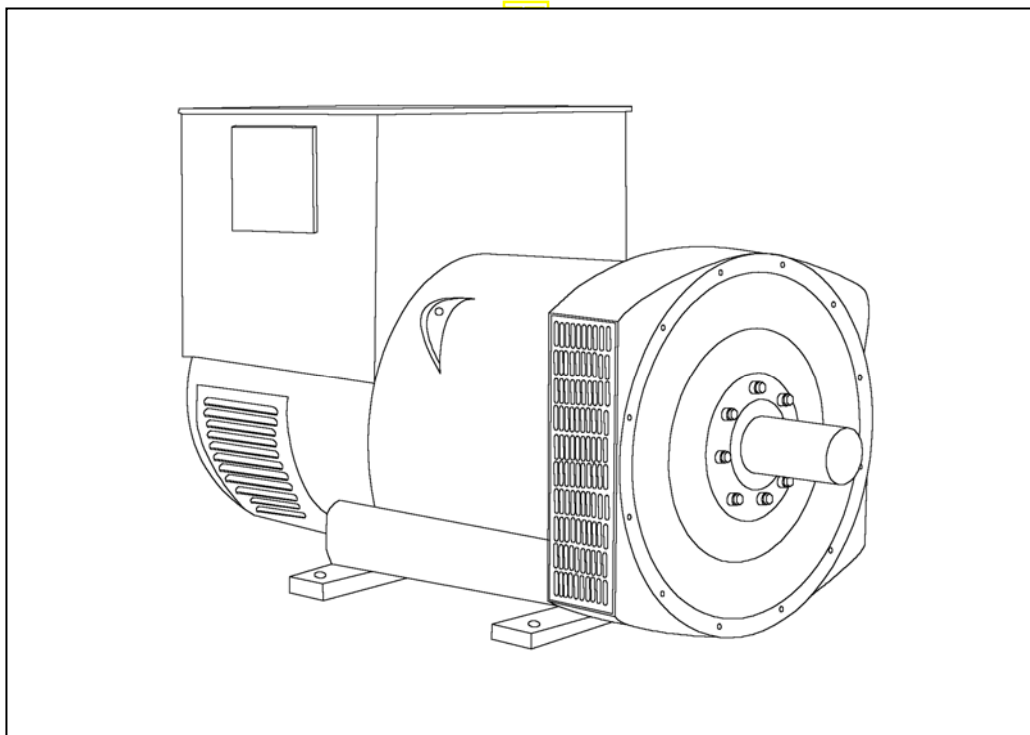

# HCI534E/544E

## SPECIFICATIONS & OPTIONS

**STAMFORD**

### STANDARDS

Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2 100, AS1359.

Other standards and certifications can be considered on request.

### VOLTAGE REGULATORS

#### AS440 AVR - STANDARD

With this self-excited system the main stator provides power via the Automatic Voltage Regulator (AVR) to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling.

The AS440 will support a range of electronic accessories, including a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

#### MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

If three-phase sensing is required with the PMG system the MX321 AVR must be used.

We recommend three-phase sensing for applications with greatly unbalanced or highly non-linear loads.

#### MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally, three-phase rms sensing, for improved regulation and performance.

Over voltage protection is built-in and short circuit current level adjustments is an optional facility.

### WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

### TERMINALS & TERMINAL BOX

Standard generators are 3-phase reconnectable with 12 ends brought out to the terminals, which are mounted on a cover at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

### SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

### INSULATION/IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

### QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

### DE RATES

All values tabulated on page 8 are subject to the following reductions

5% when air inlet filters are fitted.

3% for every 500 metres by which the operating altitude exceeds 1000 metres above mean sea level.

3% for every 5°C by which the operational ambient temperature exceeds 40°C.

Note: Requirement for operating in an ambient exceeding 60°C must be referred to the factory.

*NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.*

*Front cover drawing typical of product range.*

WINDING 311

|                         |                                                  |         |                          |
|-------------------------|--------------------------------------------------|---------|--------------------------|
| CONTROL SYSTEM          | SEPARATELY EXCITED BY P.M.G.                     |         |                          |
| A.V.R.                  | MX321                                            | MX341   |                          |
| VOLTAGE REGULATION      | ± 0.5 %                                          | ± 1.0 % | With 4% ENGINE GOVERNING |
| SUSTAINED SHORT CIRCUIT | REFER TO SHORT CIRCUIT DECREMENT CURVES (page 7) |         |                          |

|                         |                                                           |                          |  |
|-------------------------|-----------------------------------------------------------|--------------------------|--|
| CONTROL SYSTEM          | SELF EXCITED                                              |                          |  |
| A.V.R.                  | AS440                                                     |                          |  |
| VOLTAGE REGULATION      | ± 1.0 %                                                   | With 4% ENGINE GOVERNING |  |
| SUSTAINED SHORT CIRCUIT | SERIES 4 CONTROL DOES NOT SUSTAIN A SHORT CIRCUIT CURRENT |                          |  |

|                    |                  |  |  |
|--------------------|------------------|--|--|
| INSULATION SYSTEM  | CLASS H          |  |  |
| PROTECTION         | IP23             |  |  |
| RATED POWER FACTOR | 0.8              |  |  |
| STATOR WINDING     | DOUBLE LAYER LAP |  |  |
| WINDING PITCH      | TWO THIRDS       |  |  |
| WINDING LEADS      | 12               |  |  |

|                           |                                                                                      |  |  |
|---------------------------|--------------------------------------------------------------------------------------|--|--|
| STATOR WDG. RESISTANCE    | 0.0043 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED                                  |  |  |
| ROTOR WDG. RESISTANCE     | 1.96 Ohms at 22°C                                                                    |  |  |
| EXCITER STATOR RESISTANCE | 17 Ohms at 22°C                                                                      |  |  |
| EXCITER ROTOR RESISTANCE  | 0.092 Ohms PER PHASE AT 22°C                                                         |  |  |
| R.F.I. SUPPRESSION        | BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. refer to factory for others |  |  |
| WAVEFORM DISTORTION       | NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%                            |  |  |
| MAXIMUM OVERSPEED         | 2250 Rev/Min                                                                         |  |  |
| BEARING DRIVE END         | BALL. 6220 (ISO)                                                                     |  |  |
| BEARING NON-DRIVE END     | BALL. 6314 (ISO)                                                                     |  |  |

|                             |                                    |  |                                    |  |
|-----------------------------|------------------------------------|--|------------------------------------|--|
|                             | 1 BEARING                          |  | 2 BEARING                          |  |
| WEIGHT COMP. GENERATOR      | 1543 kg                            |  | 1535 kg                            |  |
| WEIGHT WOUND STATOR         | 722 kg                             |  | 722 kg                             |  |
| WEIGHT WOUND ROTOR          | 617 kg                             |  | 588 kg                             |  |
| WR <sup>2</sup> INERTIA     | 8.9828 kgm <sup>2</sup>            |  | 8.7049 kgm <sup>2</sup>            |  |
| SHIPPING WEIGHTS in a crate | 1635 kg                            |  | 1625 kg                            |  |
| PACKING CRATE SIZE          | 166 x 87 x 124(cm)                 |  | 166 x 87 x 124(cm)                 |  |
|                             | 50 Hz                              |  | 60 Hz                              |  |
| TELEPHONE INTERFERENCE      | THF<2%                             |  | TIF<50                             |  |
| COOLING AIR                 | 1.035 m <sup>3</sup> /sec 2202 cfm |  | 1.312 m <sup>3</sup> /sec 2780 cfm |  |

|                                      |         |         |         |         |         |         |         |         |
|--------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| VOLTAGE SERIES STAR                  | 380/220 | 400/231 | 415/240 | 440/254 | 416/240 | 440/254 | 460/266 | 480/277 |
| VOLTAGE PARALLEL STAR                | 190/110 | 200/115 | 208/120 | 220/127 | 208/120 | 220/127 | 230/133 | 240/138 |
| VOLTAGE SERIES DELTA                 | 220/110 | 230/115 | 240/120 | 254/127 | 240/120 | 254/127 | 266/133 | 277/138 |
| KVA BASE RATING FOR REACTANCE VALUES | 600     | 610     | 600     | 600     | 681     | 713     | 731     | 750     |
| Xd DIR. AXIS SYNCHRONOUS             | 3.14    | 2.88    | 2.63    | 2.34    | 3.53    | 3.30    | 3.10    | 2.92    |
| X'd DIR. AXIS TRANSIENT              | 0.17    | 0.15    | 0.14    | 0.12    | 0.17    | 0.16    | 0.15    | 0.14    |
| X''d DIR. AXIS SUBTRANSIENT          | 0.12    | 0.11    | 0.10    | 0.09    | 0.12    | 0.11    | 0.11    | 0.10    |
| Xq QUAD. AXIS REACTANCE              | 2.45    | 2.25    | 2.05    | 1.82    | 2.82    | 2.64    | 2.48    | 2.33    |
| X''q QUAD. AXIS SUBTRANSIENT         | 0.26    | 0.24    | 0.22    | 0.20    | 0.34    | 0.32    | 0.30    | 0.28    |
| X <sub>L</sub> LEAKAGE REACTANCE     | 0.06    | 0.05    | 0.05    | 0.04    | 0.06    | 0.06    | 0.05    | 0.05    |
| X <sub>2</sub> NEGATIVE SEQUENCE     | 0.18    | 0.16    | 0.15    | 0.13    | 0.23    | 0.22    | 0.20    | 0.19    |
| X <sub>0</sub> ZERO SEQUENCE         | 0.08    | 0.08    | 0.07    | 0.06    | 0.10    | 0.09    | 0.09    | 0.08    |

| REACTANCES ARE SATURATED    |  | VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED |  |
|-----------------------------|--|-----------------------------------------------------|--|
| T'd TRANSIENT TIME CONST.   |  | 0.08s                                               |  |
| T''d SUB-TRANSTIME CONST.   |  | 0.012s                                              |  |
| T'do O.C. FIELD TIME CONST. |  | 2.5s                                                |  |
| Ta ARMATURE TIME CONST.     |  | 0.019s                                              |  |
| SHORT CIRCUIT RATIO         |  | 1/Xd                                                |  |





50  
Hz

HCI534E/544E

Winding 311

**STAMFORD**

**THREE PHASE EFFICIENCY CURVES**

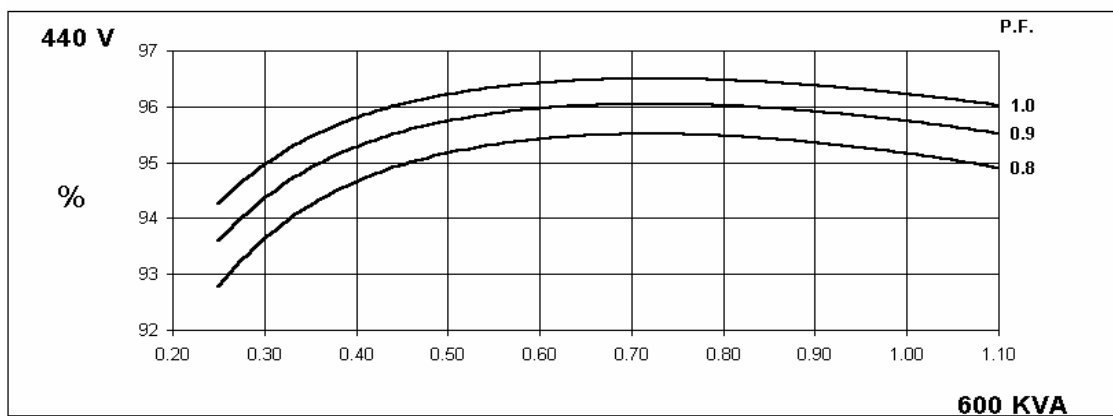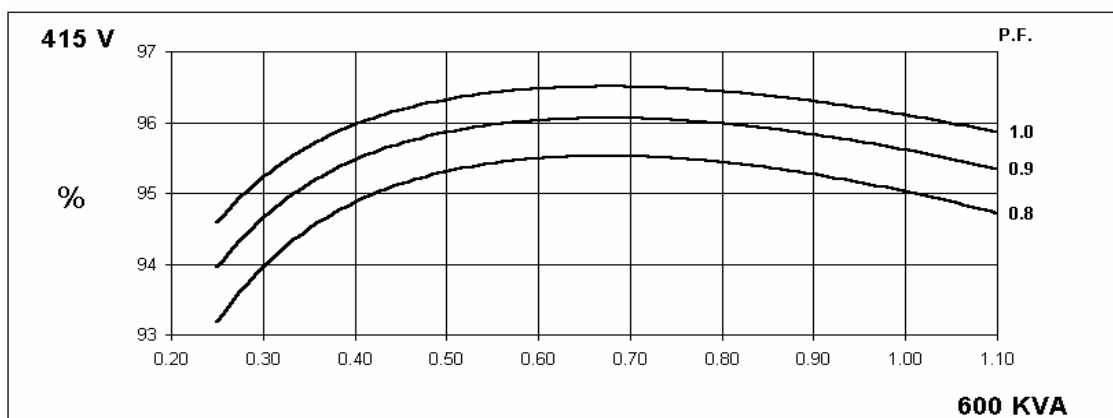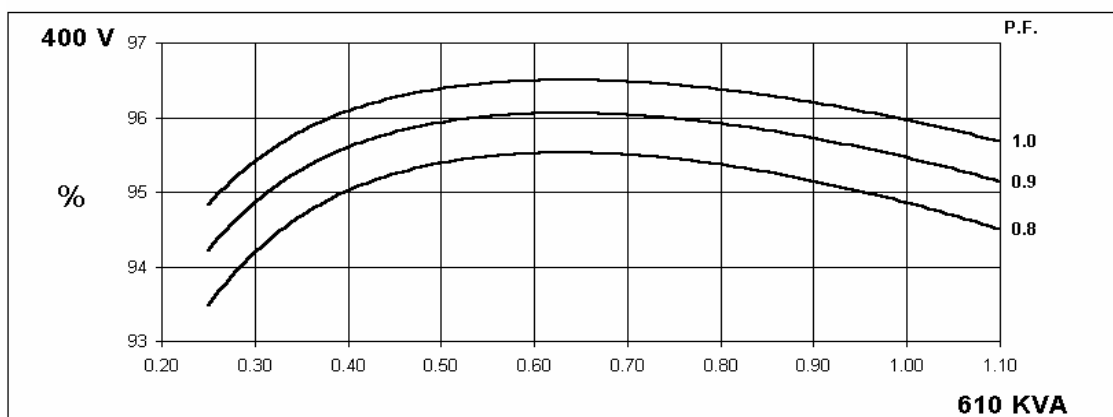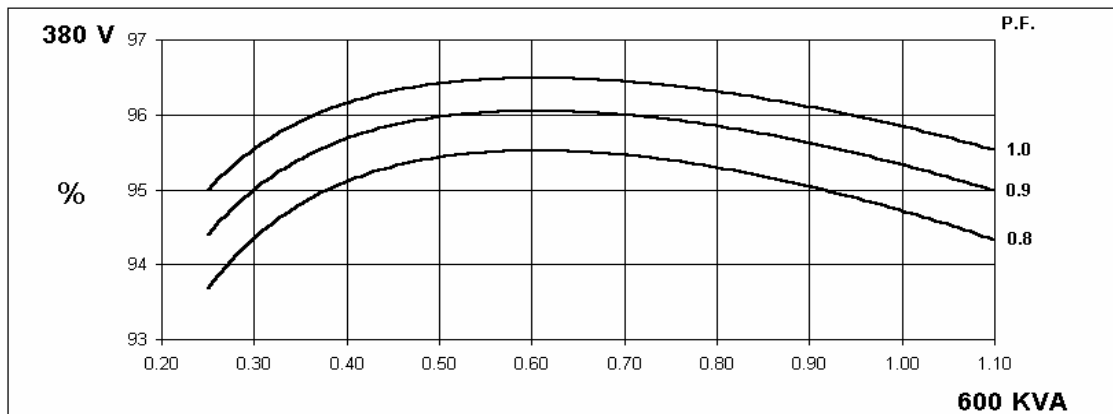





60  
Hz

HCI534E/544E

Winding 311

**STAMFORD**

**THREE PHASE EFFICIENCY CURVES**

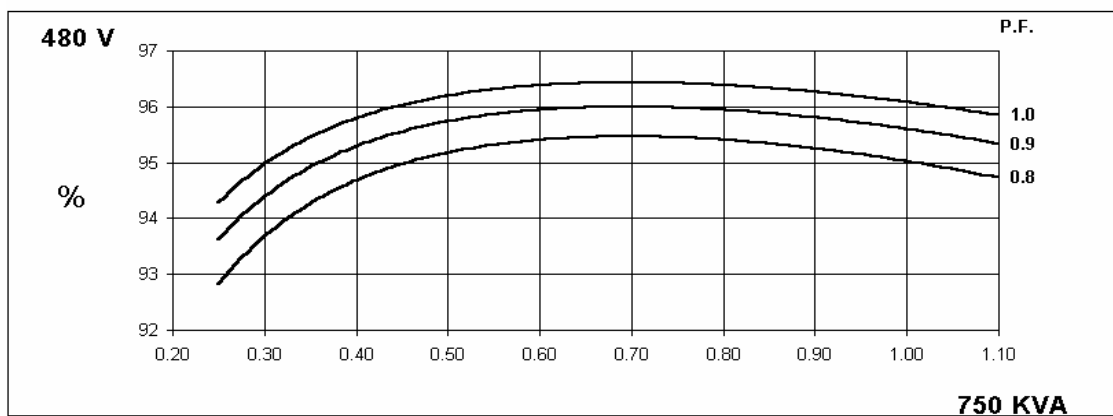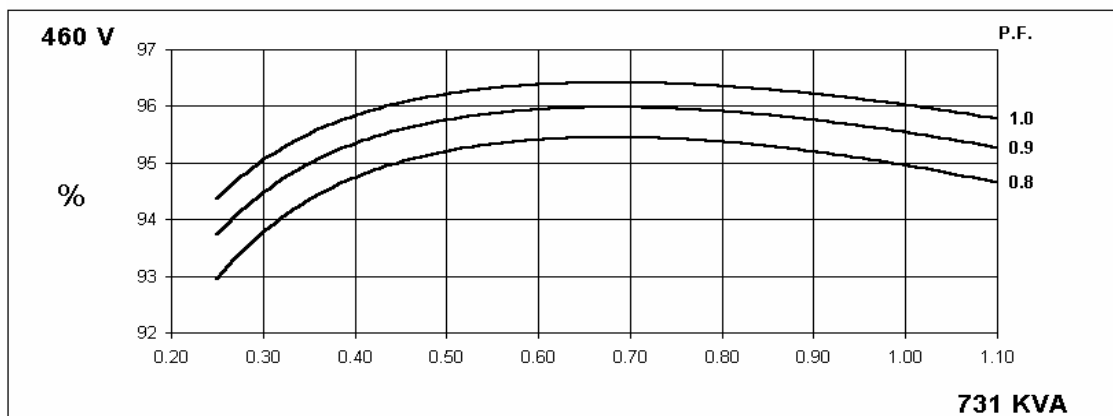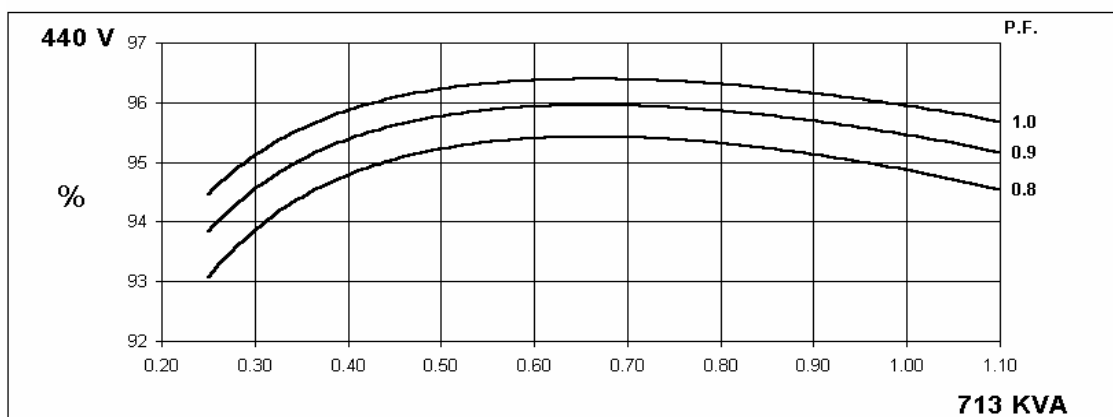
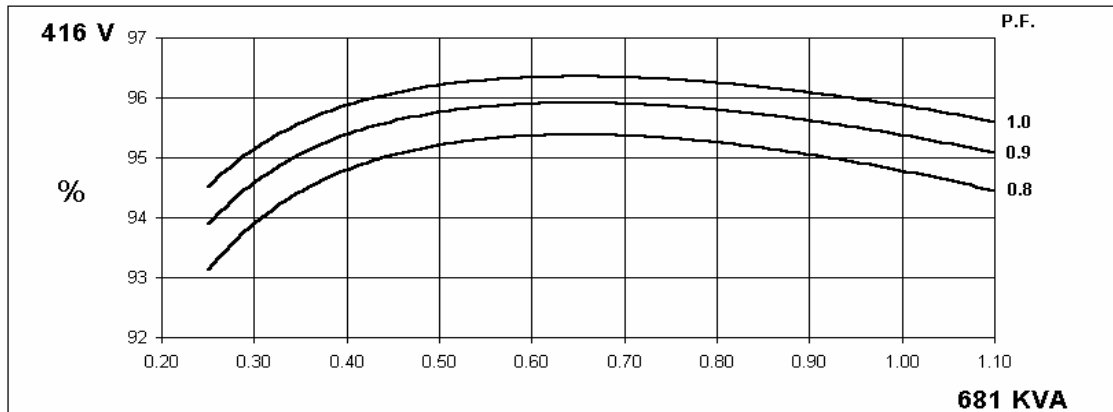


**Locked Rotor Motor Starting Curve**

50  
Hz

MX



SX

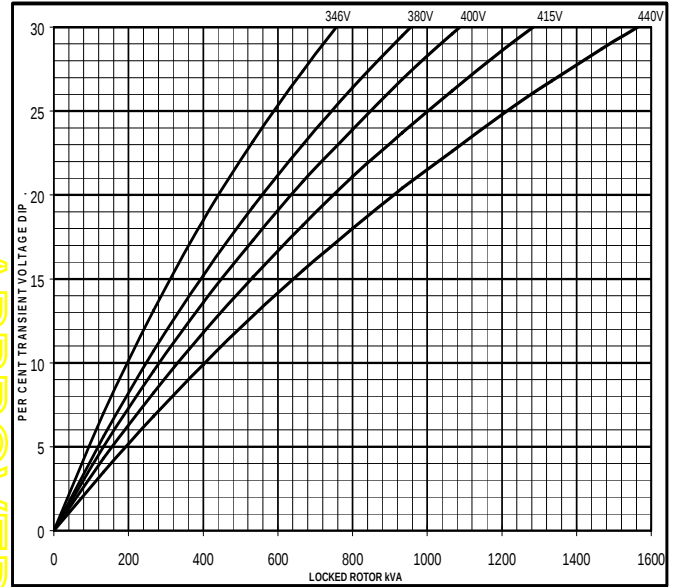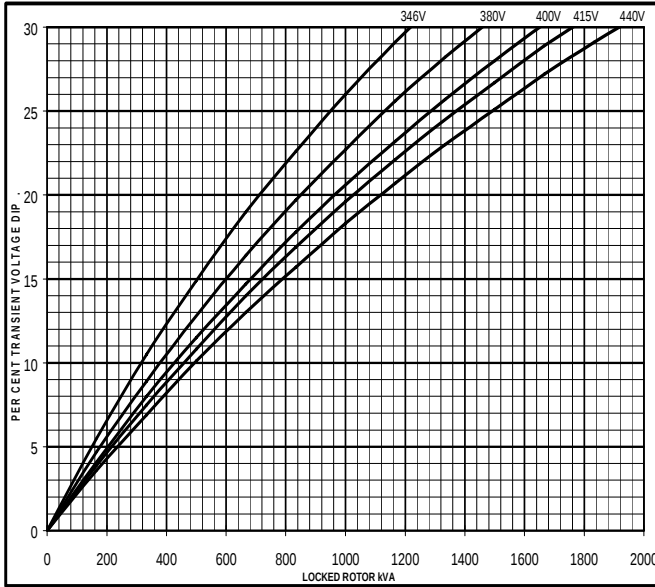

60  
Hz


MX

SX

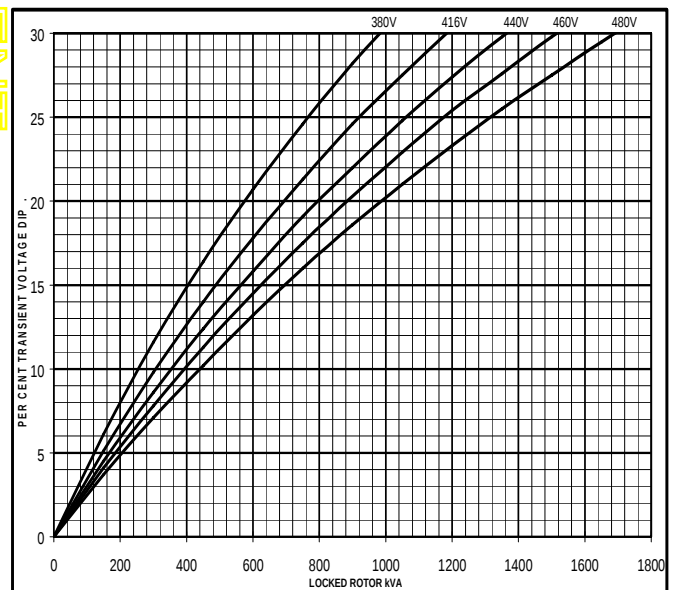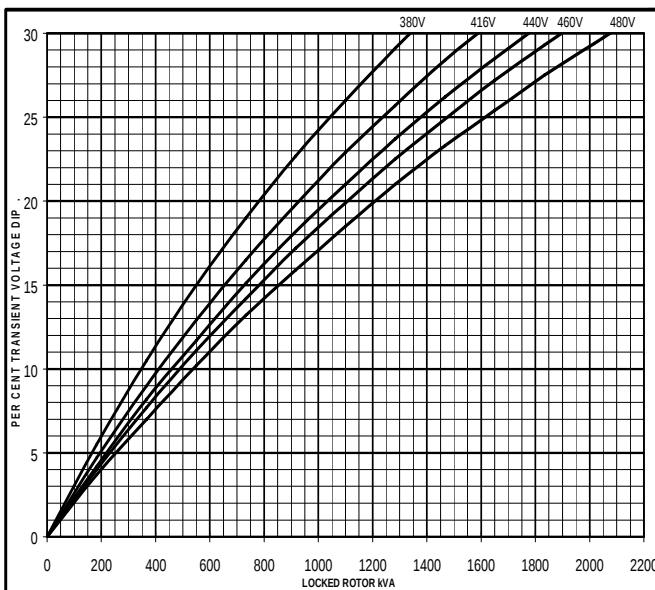

**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed  
Based on star (wye) connection.**


**50  
Hz**

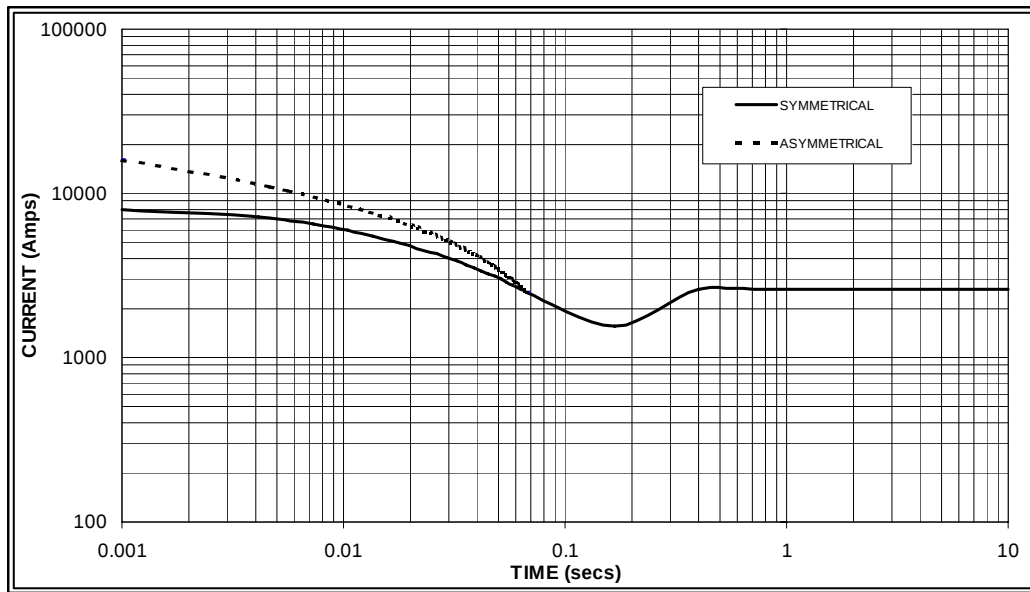

Sustained Short Circuit = 2,600 Amps



**60  
Hz**

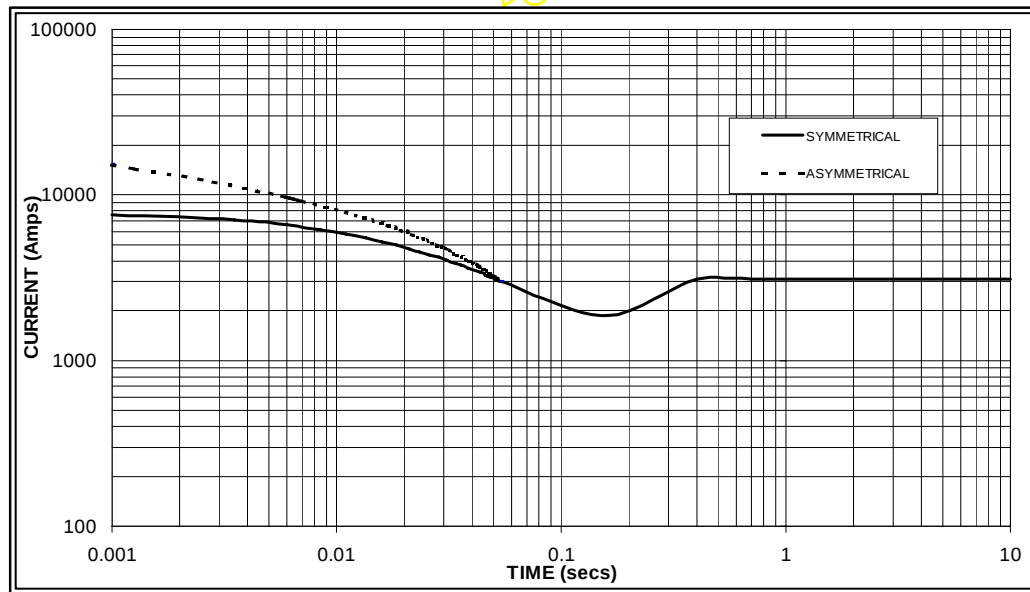

Sustained Short Circuit = 3,100 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

| 50Hz    |        | 60Hz    |        |
|---------|--------|---------|--------|
| Voltage | Factor | Voltage | Factor |
| 380v    | X 1.00 | 416v    | X 1.00 |
| 400v    | X 1.06 | 440v    | X 1.06 |
| 415v    | X 1.09 | 460v    | X 1.12 |
| 440v    | X 1.12 | 480v    | X 1.20 |

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

|                         | 3-phase | 2-phase L-L | 1-phase L-N |
|-------------------------|---------|-------------|-------------|
| Instantaneous           | x 1.00  | x 0.87      | x 1.30      |
| Minimum                 | x 1.00  | x 1.80      | x 3.20      |
| Sustained               | x 1.00  | x 1.50      | x 2.50      |
| Max. sustained duration | 10 sec. | 5 sec.      | 2 sec.      |

All other times are unchanged

**Note 3**

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

# HCI534E/544E

## Winding 311      0.8 Power Factor


**STAMFORD**

### RATINGS

| Class - Temp Rise |                   | Cont. F - 105/40°C |      |      |      | Cont. H - 125/40°C |      |      |      | Standby - 150/40°C |      |      |      | Standby - 163/27°C |      |      |      |
|-------------------|-------------------|--------------------|------|------|------|--------------------|------|------|------|--------------------|------|------|------|--------------------|------|------|------|
| <b>50 Hz</b>      | Series Star (V)   | 380                | 400  | 415  | 440  | 380                | 400  | 415  | 440  | 380                | 400  | 415  | 440  | 380                | 400  | 415  | 440  |
|                   | Parallel Star (V) | 190                | 200  | 208  | 220  | 190                | 200  | 208  | 220  | 190                | 200  | 208  | 220  | 190                | 200  | 208  | 220  |
|                   | Series Delta (V)  | 220                | 230  | 240  | 254  | 220                | 230  | 240  | 254  | 220                | 230  | 240  | 254  | 220                | 230  | 240  | 254  |
|                   | kVA               | 550                | 560  | 550  | 550  | 600                | 610  | 600  | 600  | 636                | 640  | 636  | 636  | 660                | 665  | 660  | 660  |
|                   | kW                | 440                | 448  | 440  | 440  | 480                | 488  | 480  | 480  | 509                | 512  | 509  | 509  | 528                | 532  | 528  | 528  |
|                   | Efficiency (%)    | 95.0               | 95.1 | 95.2 | 95.3 | 94.7               | 94.9 | 95.0 | 95.2 | 94.5               | 94.7 | 94.8 | 95.0 | 94.3               | 94.5 | 94.7 | 94.9 |
|                   | kW Input          | 463                | 471  | 462  | 462  | 507                | 514  | 505  | 504  | 538                | 541  | 537  | 536  | 560                | 563  | 558  | 556  |

|              |                   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------------|-------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <b>60 Hz</b> | Series Star (V)   | 416  | 440  | 460  | 480  | 416  | 440  | 460  | 480  | 416  | 440  | 460  | 480  | 416  | 440  | 460  | 480  |
|              | Parallel Star (V) | 208  | 220  | 230  | 240  | 208  | 220  | 230  | 240  | 208  | 220  | 230  | 240  | 208  | 220  | 230  | 240  |
|              | Delta (V)         | 240  | 254  | 266  | 277  | 240  | 254  | 266  | 277  | 240  | 254  | 266  | 277  | 240  | 254  | 266  | 277  |
|              | kVA               | 625  | 650  | 663  | 675  | 681  | 713  | 731  | 750  | 719  | 750  | 780  | 800  | 738  | 769  | 798  | 819  |
|              | kW                | 500  | 520  | 530  | 540  | 545  | 570  | 585  | 600  | 575  | 600  | 624  | 640  | 590  | 615  | 638  | 655  |
|              | Efficiency (%)    | 95.0 | 95.1 | 95.2 | 95.3 | 94.8 | 94.9 | 95.0 | 95.0 | 94.6 | 94.7 | 94.8 | 94.8 | 94.5 | 94.6 | 94.7 | 94.8 |
|              | kW Input          | 526  | 547  | 557  | 567  | 575  | 601  | 616  | 632  | 608  | 634  | 658  | 675  | 625  | 650  | 674  | 691  |

### DIMENSIONS

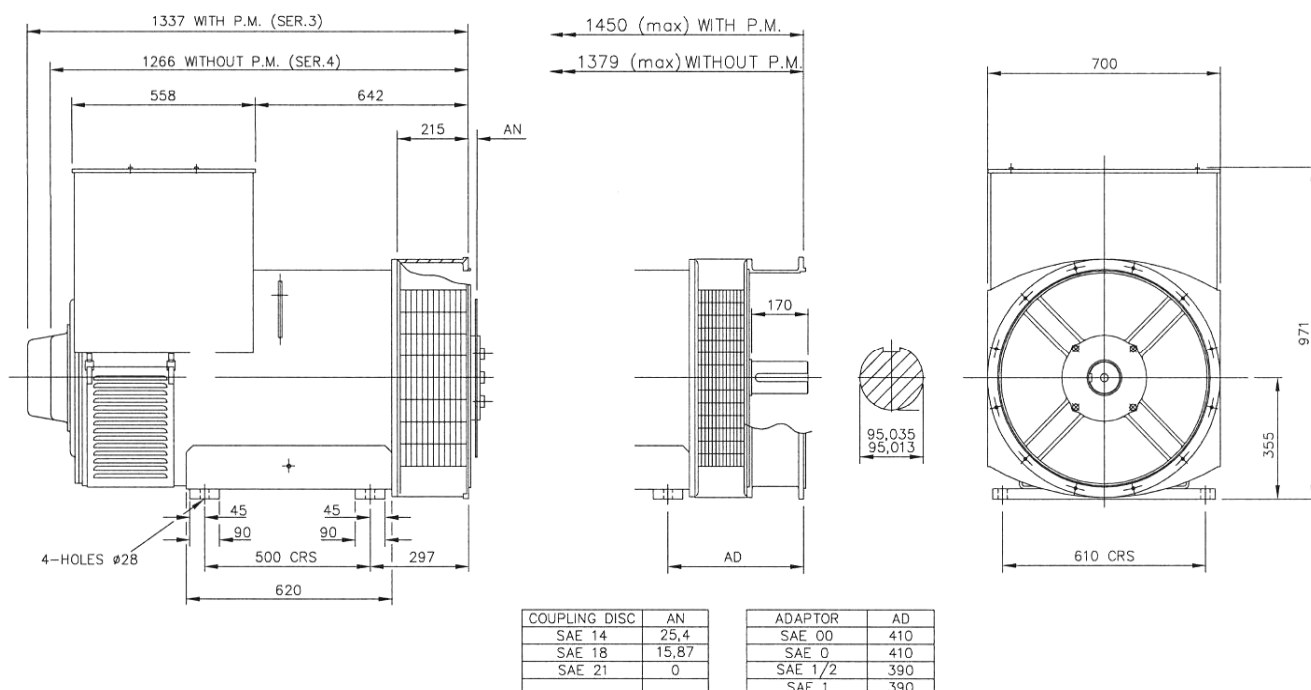

APPROVED DOCUMENT

**STAMFORD**

Head Office Address:  
Barnack Road, Stamford  
Lincolnshire, PE9 2NB  
United Kingdom  
Tel: +44 (0) 1780 484000  
Fax: +44 (0) 1780 484100

[www.cumminsgeneratortechnologies.com](http://www.cumminsgeneratortechnologies.com)


Copyright 2010, Cummins Generator Technologies Ltd, All Rights Reserved  
Stamford and AvK are registered trade marks of Cummins Generator Technologies Ltd  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.

HC5E-311-TD-EN-SG-A

# STAMFORD<sup>®</sup>

**HCI 534D/544D - Winding 311**

Technical  Data Sheet

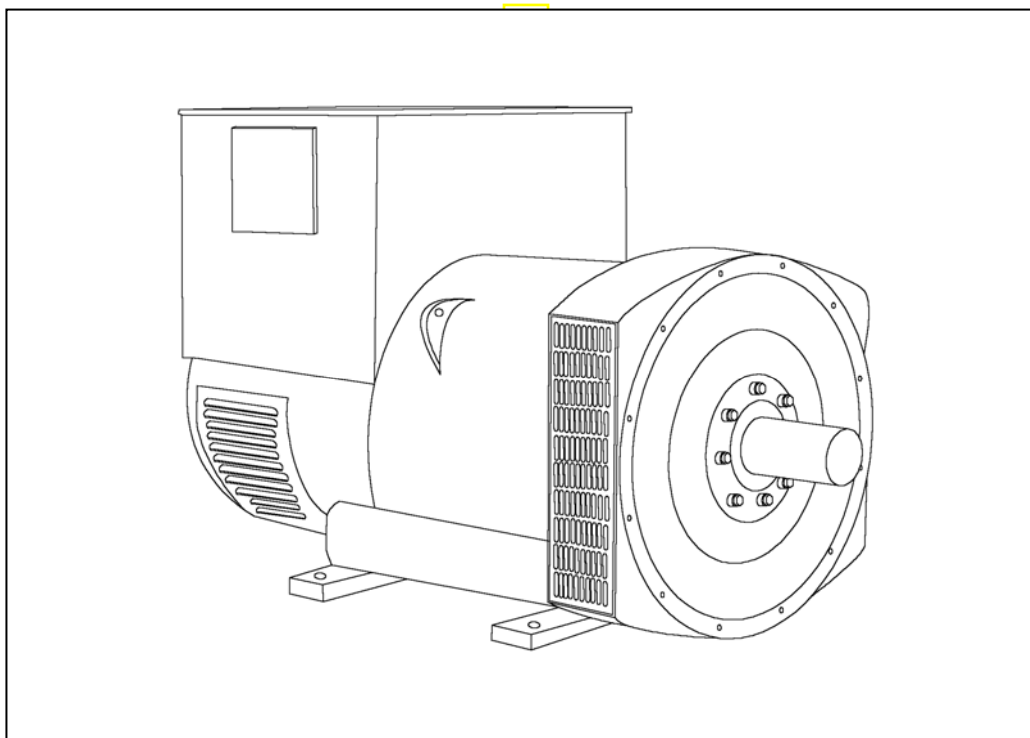

# HCI534D/544D

## SPECIFICATIONS & OPTIONS

**STAMFORD**

### STANDARDS

Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2 100, AS1359.

Other standards and certifications can be considered on request.

### VOLTAGE REGULATORS

#### AS440 AVR - STANDARD

With this self-excited system the main stator provides power via the Automatic Voltage Regulator (AVR) to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling.

The AS440 will support a range of electronic accessories, including a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

#### MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

If three-phase sensing is required with the PMG system the MX321 AVR must be used.

We recommend three-phase sensing for applications with greatly unbalanced or highly non-linear loads.

#### MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally, three-phase rms sensing, for improved regulation and performance.

Over voltage protection is built-in and short circuit current level adjustments is an optional facility.

### WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

### TERMINALS & TERMINAL BOX

Standard generators are 3-phase reconnectable with 12 ends brought out to the terminals, which are mounted on a cover at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

### SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

### INSULATION/IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

### QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

### DE RATES

All values tabulated on page 8 are subject to the following reductions

5% when air inlet filters are fitted.

3% for every 500 metres by which the operating altitude exceeds 1000 metres above mean sea level.

3% for every 5°C by which the operational ambient temperature exceeds 40°C.

Note: Requirement for operating in an ambient exceeding 60°C must be referred to the factory.

*NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.*

*Front cover drawing typical of product range.*

# HC1534D/544D

**STAMFORD**

## WINDING 311

|                         |                                                  |         |                          |
|-------------------------|--------------------------------------------------|---------|--------------------------|
| CONTROL SYSTEM          | SEPARATELY EXCITED BY P.M.G.                     |         |                          |
| A.V.R.                  | MX321                                            | MX341   |                          |
| VOLTAGE REGULATION      | ± 0.5 %                                          | ± 1.0 % | With 4% ENGINE GOVERNING |
| SUSTAINED SHORT CIRCUIT | REFER TO SHORT CIRCUIT DECREMENT CURVES (page 7) |         |                          |

|                         |                                                           |                          |  |
|-------------------------|-----------------------------------------------------------|--------------------------|--|
| CONTROL SYSTEM          | SELF EXCITED                                              |                          |  |
| A.V.R.                  | AS440                                                     |                          |  |
| VOLTAGE REGULATION      | ± 1.0 %                                                   | With 4% ENGINE GOVERNING |  |
| SUSTAINED SHORT CIRCUIT | SERIES 4 CONTROL DOES NOT SUSTAIN A SHORT CIRCUIT CURRENT |                          |  |

|                    |                  |  |  |
|--------------------|------------------|--|--|
| INSULATION SYSTEM  | CLASS H          |  |  |
| PROTECTION         | IP23             |  |  |
| RATED POWER FACTOR | 0.8              |  |  |
| STATOR WINDING     | DOUBLE LAYER LAP |  |  |
| WINDING PITCH      | TWO THIRDS       |  |  |
| WINDING LEADS      | 12               |  |  |

|                           |                                                                                      |  |  |
|---------------------------|--------------------------------------------------------------------------------------|--|--|
| STATOR WDG. RESISTANCE    | 0.0049 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED                                  |  |  |
| ROTOR WDG. RESISTANCE     | 1.77 Ohms at 22°C                                                                    |  |  |
| EXCITER STATOR RESISTANCE | 17 Ohms at 22°C                                                                      |  |  |
| EXCITER ROTOR RESISTANCE  | 0.092 Ohms PER PHASE AT 22°C                                                         |  |  |
| R.F.I. SUPPRESSION        | BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. refer to factory for others |  |  |
| WAVEFORM DISTORTION       | NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%                            |  |  |
| MAXIMUM OVERSPEED         | 2250 Rev/Min                                                                         |  |  |
| BEARING DRIVE END         | BALL. 6220 (ISO)                                                                     |  |  |
| BEARING NON-DRIVE END     | BALL. 6314 (ISO)                                                                     |  |  |

|                             |                         |  |                         |  |
|-----------------------------|-------------------------|--|-------------------------|--|
|                             | 1 BEARING               |  | 2 BEARING               |  |
| WEIGHT COMP. GENERATOR      | 1393 kg                 |  | 1395 kg                 |  |
| WEIGHT WOUND STATOR         | 657 kg                  |  | 657 kg                  |  |
| WEIGHT WOUND ROTOR          | 563 kg                  |  | 535 kg                  |  |
| WR <sup>2</sup> INERTIA     | 8.0068 kgm <sup>2</sup> |  | 7.7289 kgm <sup>2</sup> |  |
| SHIPPING WEIGHTS in a crate | 1485 kg                 |  | 1485 kg                 |  |
| PACKING CRATE SIZE          | 166 x 87 x 124(cm)      |  | 166 x 87 x 124(cm)      |  |
|                             | 50 Hz                   |  | 60 Hz                   |  |
| TELEPHONE INTERFERENCE      | THF<2%                  |  | TIF<50                  |  |
| COOLING AIR                 | 1.035 m³/sec 2202 cfm   |  | 1.312 m³/sec 2780 cfm   |  |

|                                      |         |         |         |         |         |         |         |         |
|--------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| VOLTAGE SERIES STAR                  | 380/220 | 400/231 | 415/240 | 440/254 | 416/240 | 440/254 | 460/266 | 480/277 |
| VOLTAGE PARALLEL STAR                | 190/110 | 200/115 | 208/120 | 220/127 | 208/120 | 220/127 | 230/133 | 240/138 |
| VOLTAGE SERIES DELTA                 | 220/110 | 230/115 | 240/120 | 254/127 | 240/120 | 254/127 | 266/133 | 277/138 |
| KVA BASE RATING FOR REACTANCE VALUES | 500     | 550     | 500     | 500     | 575     | 594     | 625     | 644     |
| Xd DIR. AXIS SYNCHRONOUS             | 3.02    | 2.99    | 2.53    | 2.25    | 3.52    | 3.25    | 3.13    | 2.96    |
| X'd DIR. AXIS TRANSIENT              | 0.16    | 0.15    | 0.13    | 0.12    | 0.17    | 0.16    | 0.15    | 0.14    |
| X''d DIR. AXIS SUBTRANSIENT          | 0.11    | 0.11    | 0.09    | 0.08    | 0.12    | 0.11    | 0.11    | 0.10    |
| Xq QUAD. AXIS REACTANCE              | 2.48    | 2.46    | 2.08    | 1.85    | 2.87    | 2.65    | 2.55    | 2.41    |
| X''q QUAD. AXIS SUBTRANSIENT         | 0.27    | 0.28    | 0.23    | 0.20    | 0.31    | 0.29    | 0.28    | 0.26    |
| X <sub>L</sub> LEAKAGE REACTANCE     | 0.05    | 0.04    | 0.04    | 0.04    | 0.06    | 0.06    | 0.05    | 0.05    |
| X <sub>2</sub> NEGATIVE SEQUENCE     | 0.19    | 0.19    | 0.16    | 0.14    | 0.22    | 0.20    | 0.20    | 0.19    |
| X <sub>0</sub> ZERO SEQUENCE         | 0.10    | 0.10    | 0.08    | 0.07    | 0.10    | 0.09    | 0.09    | 0.08    |

| REACTANCES ARE SATURATED    |  | VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED |  |
|-----------------------------|--|-----------------------------------------------------|--|
| T'd TRANSIENT TIME CONST.   |  | 0.08s                                               |  |
| T''d SUB-TRANSTIME CONST.   |  | 0.012s                                              |  |
| T'do O.C. FIELD TIME CONST. |  | 2.2s                                                |  |
| Ta ARMATURE TIME CONST.     |  | 0.018s                                              |  |
| SHORT CIRCUIT RATIO         |  | 1/Xd                                                |  |





50  
Hz

HCI534D/544D

Winding 311

**STAMFORD**

**THREE PHASE EFFICIENCY CURVES**

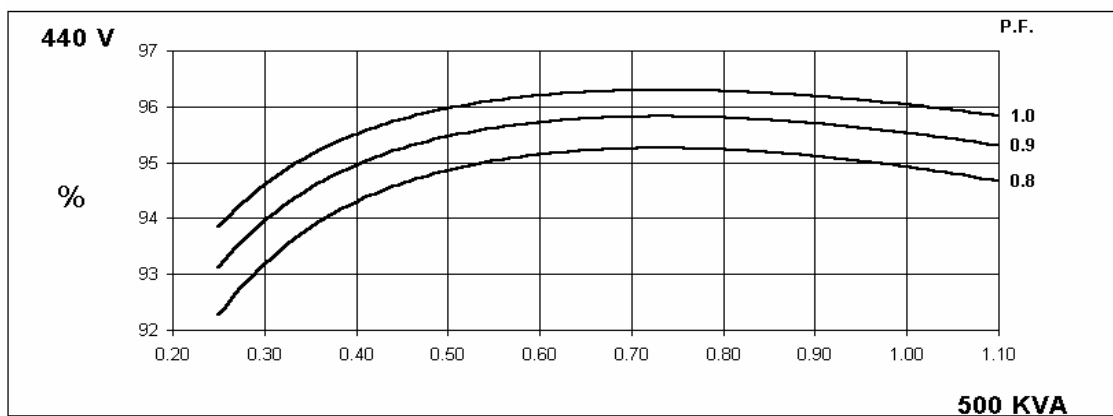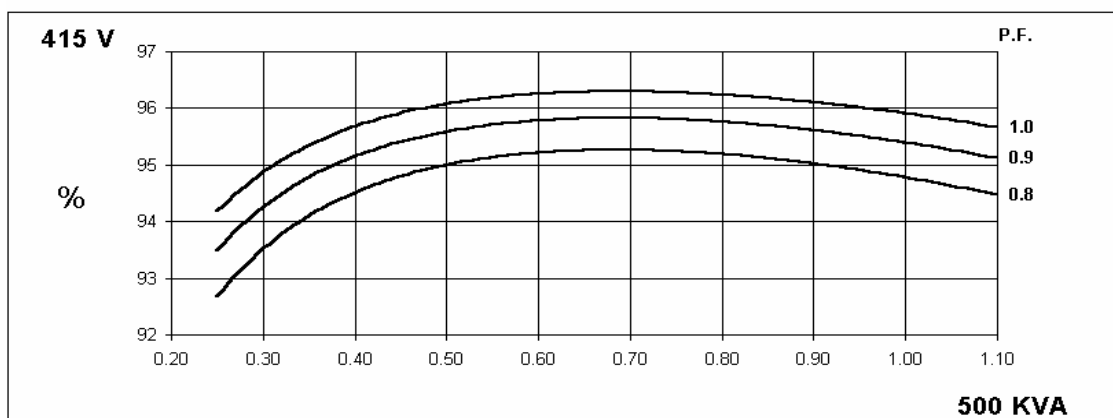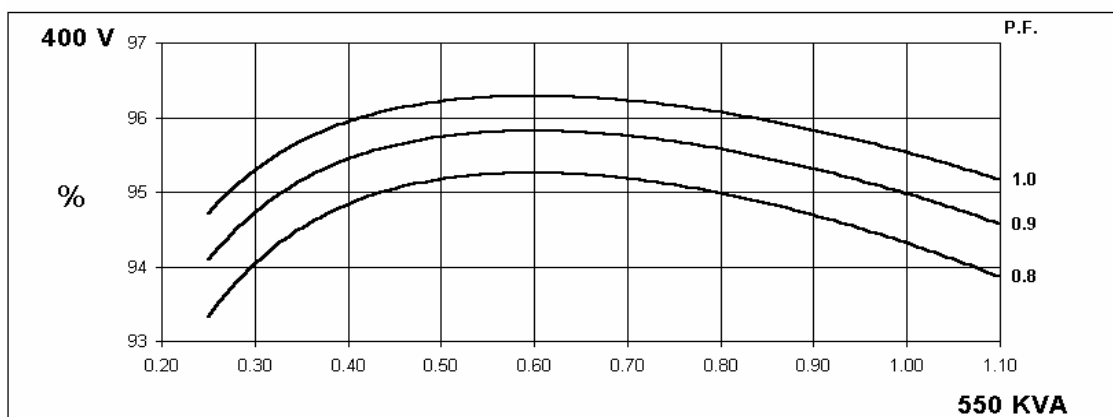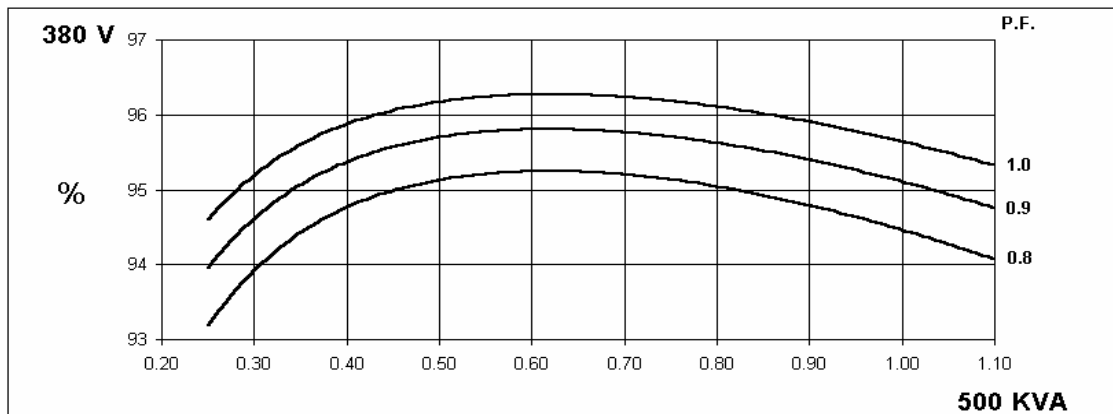





60  
Hz

HCI534D/544D

Winding 311

**STAMFORD**

**THREE PHASE EFFICIENCY CURVES**

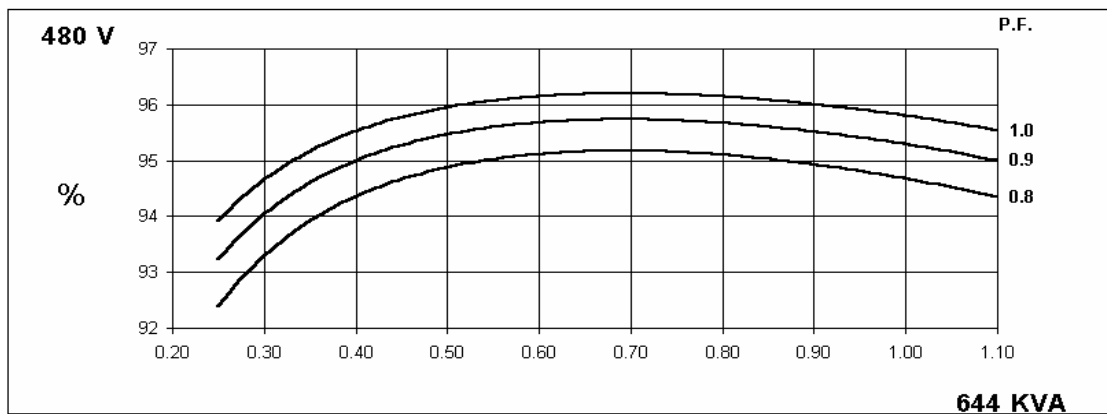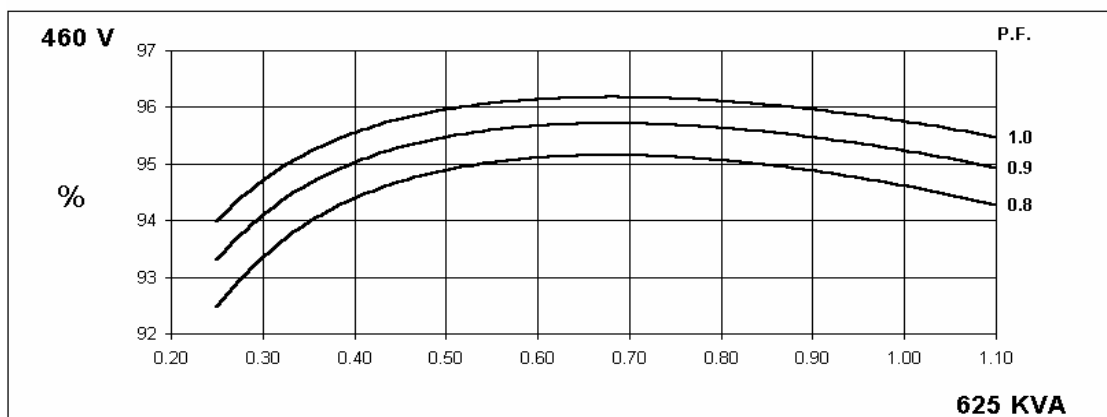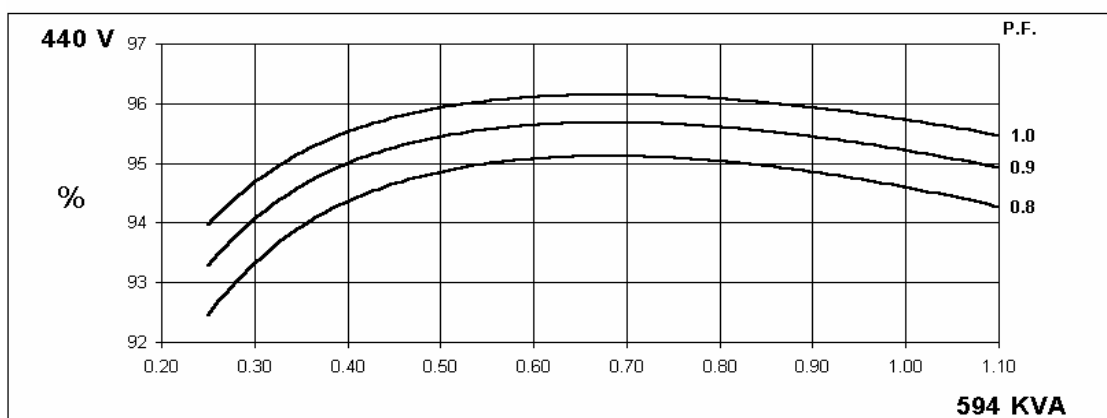
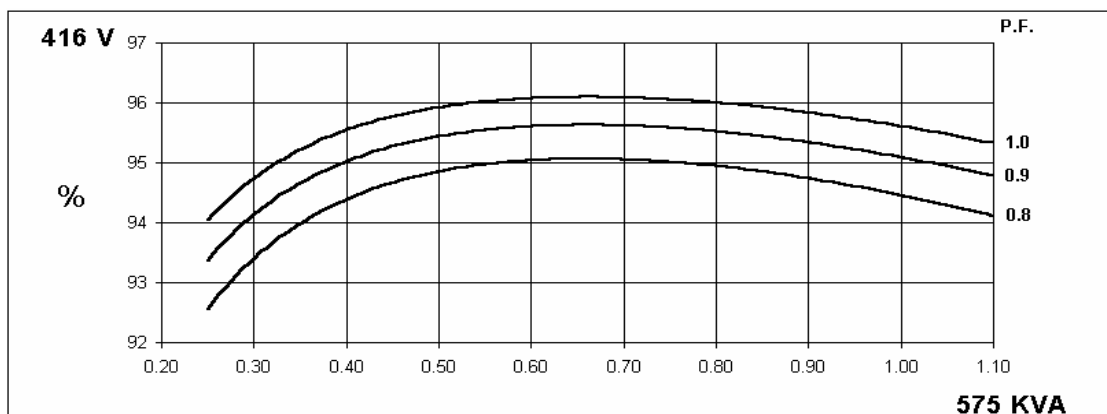


**Locked Rotor Motor Starting Curve**

50  
Hz

MX



SX

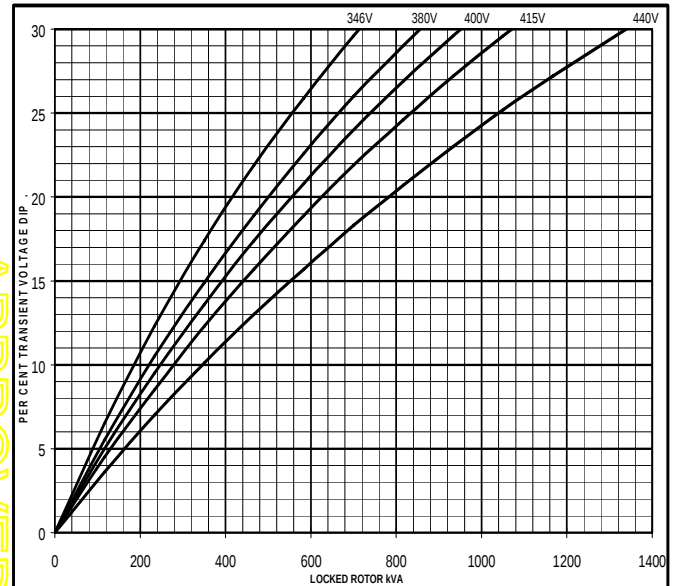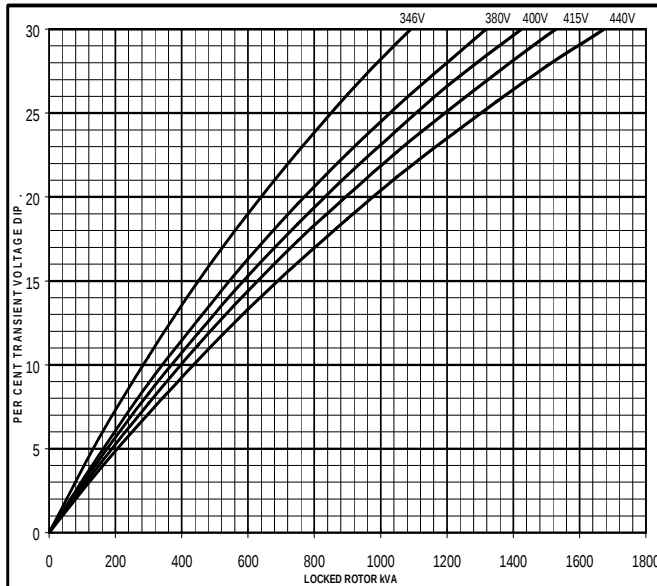

60  
Hz


MX

SX

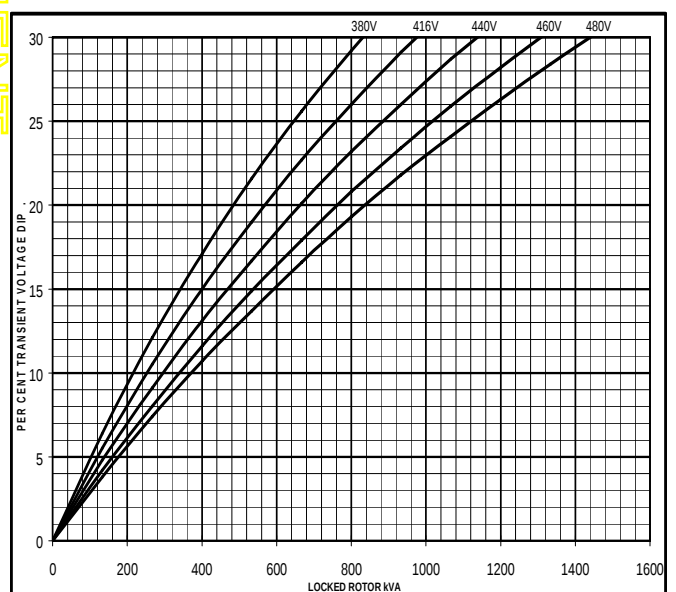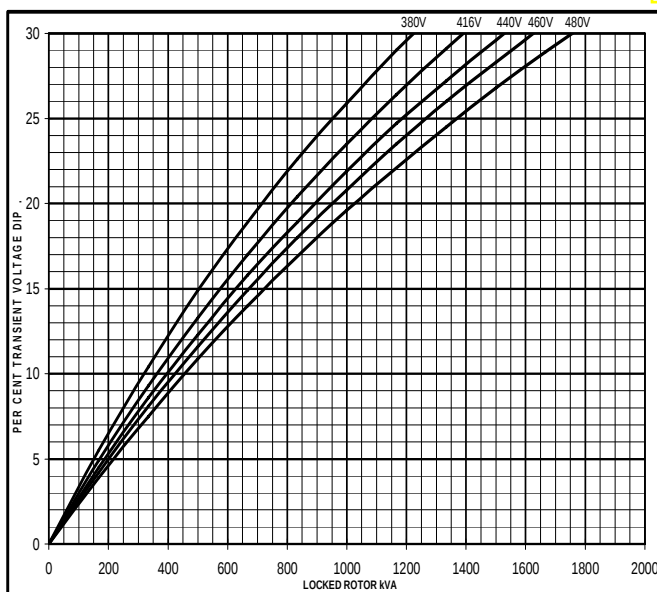

**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed  
Based on star (wye) connection.**


**50  
Hz**

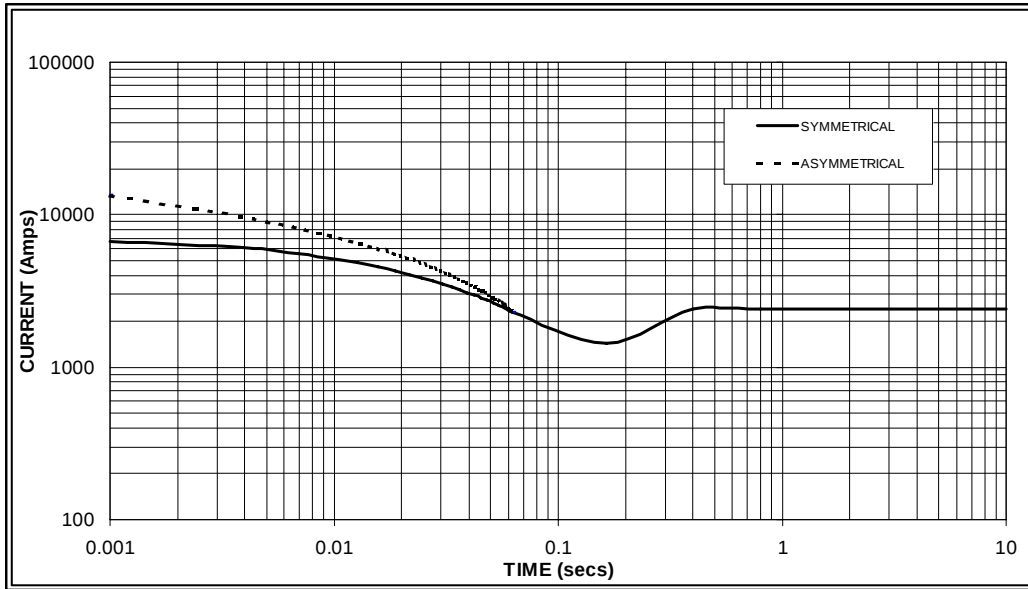

Sustained Short Circuit = 2,400 Amps



**60  
Hz**

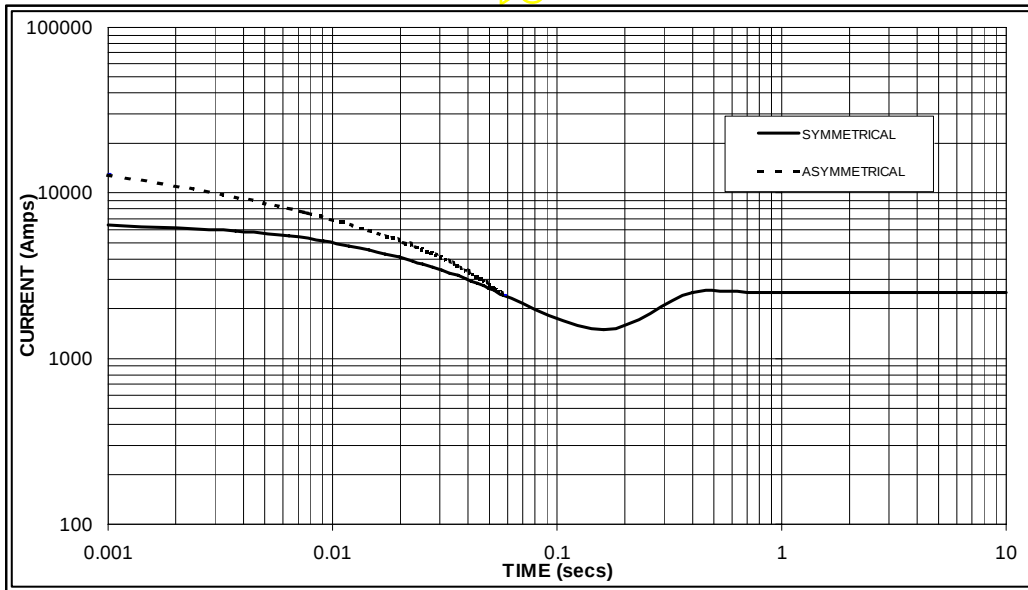

Sustained Short Circuit = 2,500 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

| 50Hz    |        | 60Hz    |        |
|---------|--------|---------|--------|
| Voltage | Factor | Voltage | Factor |
| 380v    | X 1.00 | 416v    | X 1.00 |
| 400v    | X 1.06 | 440v    | X 1.06 |
| 415v    | X 1.09 | 460v    | X 1.12 |
| 440v    | X 1.12 | 480v    | X 1.20 |

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

|                         | 3-phase | 2-phase L-L | 1-phase L-N |
|-------------------------|---------|-------------|-------------|
| Instantaneous           | x 1.00  | x 0.87      | x 1.30      |
| Minimum                 | x 1.00  | x 1.80      | x 3.20      |
| Sustained               | x 1.00  | x 1.50      | x 2.50      |
| Max. sustained duration | 10 sec. | 5 sec.      | 2 sec.      |

All other times are unchanged

**Note 3**

Curves are drawn for Star (Wye) connected machines. For other connections the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

# HCI534D/544D

## Winding 311      0.8 Power Factor


**STAMFORD**

### RATINGS

| Class - Temp Rise |                   | Cont. F - 105/40°C |      |      |      | Cont. H - 125/40°C |      |      |      | Standby - 150/40°C |      |      |      | Standby - 163/27°C |      |      |      |
|-------------------|-------------------|--------------------|------|------|------|--------------------|------|------|------|--------------------|------|------|------|--------------------|------|------|------|
| <b>50 Hz</b>      | Series Star (V)   | 380                | 400  | 415  | 440  | 380                | 400  | 415  | 440  | 380                | 400  | 415  | 440  | 380                | 400  | 415  | 440  |
|                   | Parallel Star (V) | 190                | 200  | 208  | 220  | 190                | 200  | 208  | 220  | 190                | 200  | 208  | 220  | 190                | 200  | 208  | 220  |
|                   | Series Delta (V)  | 220                | 230  | 240  | 254  | 220                | 230  | 240  | 254  | 220                | 230  | 240  | 254  | 220                | 230  | 240  | 254  |
|                   | kVA               | 450                | 495  | 450  | 450  | 500                | 550  | 500  | 500  | 515                | 575  | 515  | 515  | 550                | 590  | 550  | 530  |
|                   | kW                | 360                | 396  | 360  | 360  | 400                | 440  | 400  | 400  | 412                | 460  | 412  | 412  | 440                | 472  | 440  | 424  |
|                   | Efficiency (%)    | 94.8               | 94.7 | 95.0 | 95.1 | 94.5               | 94.3 | 94.8 | 94.9 | 94.4               | 94.1 | 94.7 | 94.9 | 94.1               | 94.0 | 94.5 | 94.8 |
|                   | kW Input          | 380                | 418  | 379  | 379  | 423                | 467  | 422  | 421  | 436                | 489  | 435  | 434  | 468                | 502  | 466  | 447  |

|              |                   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------------|-------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <b>60 Hz</b> | Series Star (V)   | 416  | 440  | 460  | 480  | 416  | 440  | 460  | 480  | 416  | 440  | 460  | 480  | 416  | 440  | 460  | 480  |
|              | Parallel Star (V) | 208  | 220  | 230  | 240  | 208  | 220  | 230  | 240  | 208  | 220  | 230  | 240  | 208  | 220  | 230  | 240  |
|              | Delta (V)         | 240  | 254  | 266  | 277  | 240  | 254  | 266  | 277  | 240  | 254  | 266  | 277  | 240  | 254  | 266  | 277  |
|              | kVA               | 519  | 538  | 563  | 588  | 575  | 594  | 625  | 644  | 588  | 625  | 655  | 675  | 606  | 644  | 673  | 694  |
|              | kW                | 415  | 430  | 450  | 470  | 460  | 475  | 500  | 515  | 470  | 500  | 524  | 540  | 485  | 515  | 538  | 555  |
|              | Efficiency (%)    | 94.7 | 94.8 | 94.9 | 94.9 | 94.5 | 94.6 | 94.6 | 94.7 | 94.4 | 94.4 | 94.5 | 94.5 | 94.3 | 94.3 | 94.4 | 94.4 |
|              | kW Input          | 438  | 454  | 475  | 496  | 487  | 502  | 529  | 544  | 498  | 530  | 554  | 571  | 514  | 546  | 570  | 588  |

### DIMENSIONS

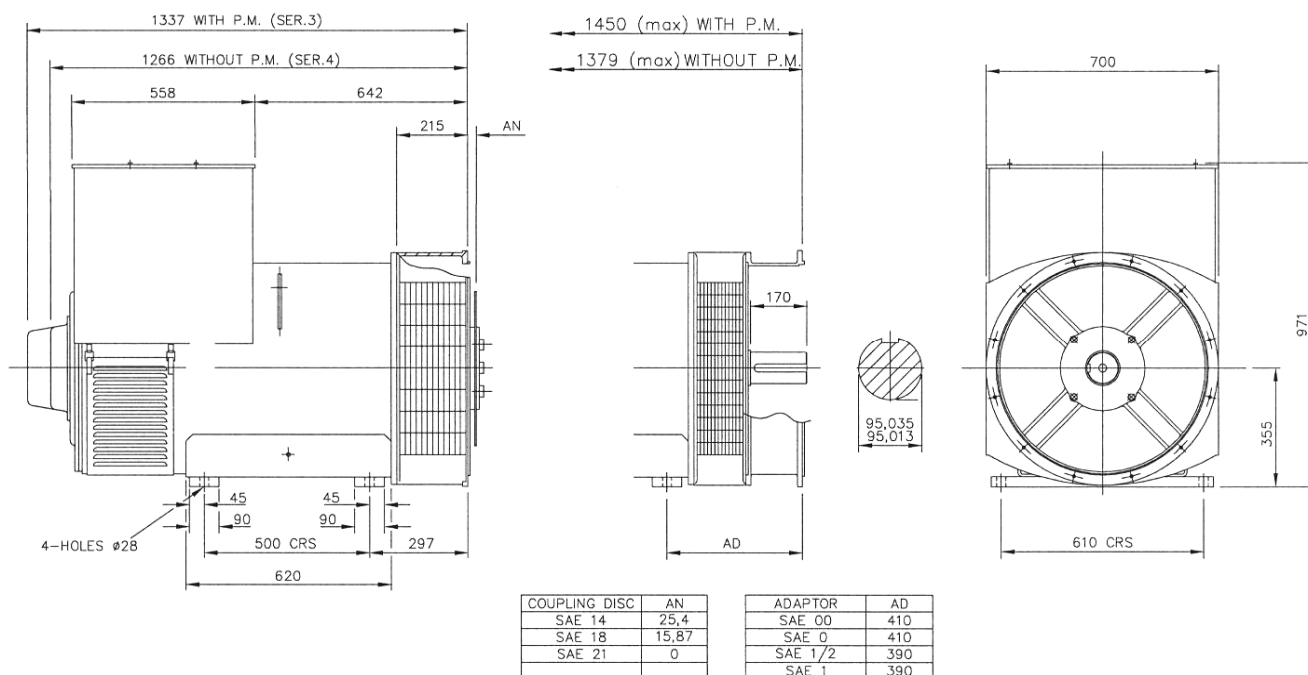

APPROVED DOCUMENT

**STAMFORD**

Head Office Address:  
Barnack Road, Stamford  
Lincolnshire, PE9 2NB  
United Kingdom  
Tel: +44 (0) 1780 484000  
Fax: +44 (0) 1780 484100

[www.cumminsgeneratortechnologies.com](http://www.cumminsgeneratortechnologies.com)


Copyright 2010, Cummins Generator Technologies Ltd, All Rights Reserved  
Stamford and AvK are registered trade marks of Cummins Generator Technologies Ltd  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.

HC5D-311-TD-EN-SG-A

# STAMFORD<sup>®</sup>

**HCI534D/544D - Winding 17**

Technical  Data Sheet

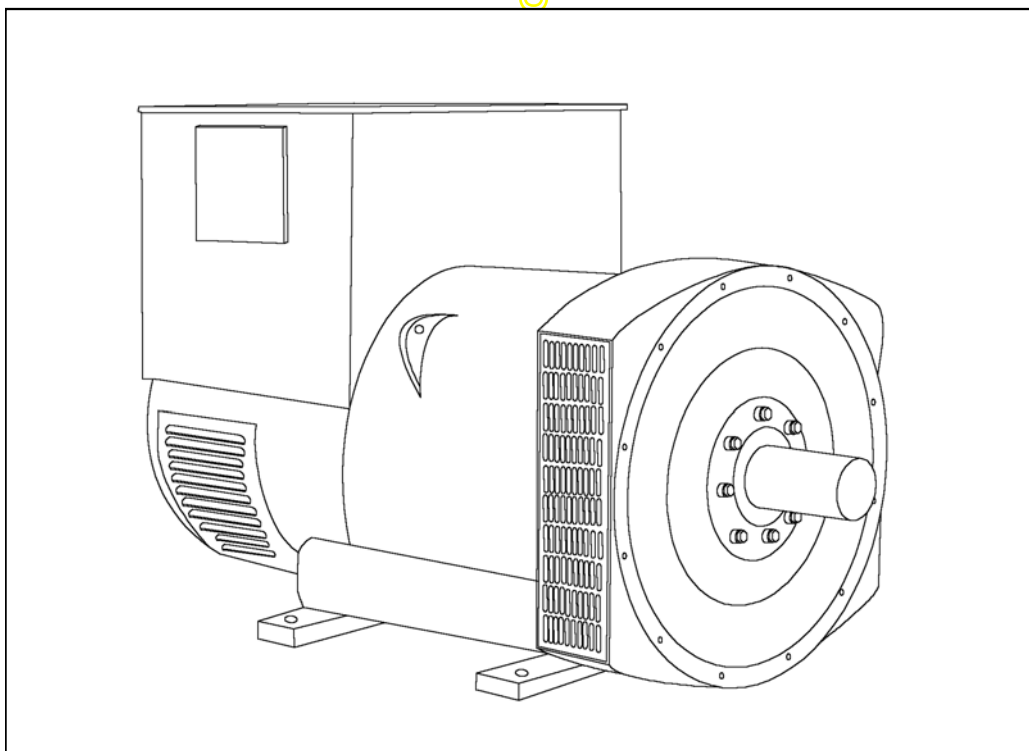

# HCI534D/544D

## SPECIFICATIONS & OPTIONS

**STAMFORD**

### STANDARDS

Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359. Other standards and certifications can be considered on request.

### VOLTAGE REGULATORS

#### AS440 AVR - STANDARD

With this self-excited system the main stator provides power via the Automatic Voltage Regulator (AVR) to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling.

The AS440 will support a range of electronic accessories, including a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

#### MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor, through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

If three-phase sensing is required with the PMG system the MX321 AVR must be used.

We recommend three-phase sensing for applications with greatly unbalanced or highly non-linear loads.

#### MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally, three-phase rms sensing, for improved regulation and performance.

Over voltage protection is built-in and short circuit current level adjustments is an optional facility.

### WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

### TERMINALS & TERMINAL BOX

Standard generators are 3-phase reconnectable with 12 ends brought out to the terminals, which are mounted on a cover at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

### SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

### INSULATION/IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

### QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

### DE RATES

All values tabulated on page 6 are subject to the following reductions

5% when air inlet filters are fitted.

3% for every 500 metres by which the operating altitude exceeds 1000 metres above mean sea level.

3% for every 5 °C by which the operational ambient temperature exceeds 40 °C.

Note: Requirement for operating in an ambient exceeding 60 °C must be referred to the factory.

*NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.*

*Front cover drawing typical of product range.*

APPROVED DOCUMENT

# HCI534D/544D

**STAMFORD**

## WINDING 17

|                         |                                                  |         |                          |
|-------------------------|--------------------------------------------------|---------|--------------------------|
| CONTROL SYSTEM          | SEPARATELY EXCITED BY P.M.G.                     |         |                          |
| A.V.R.                  | MX321                                            | MX341   |                          |
| VOLTAGE REGULATION      | ± 0.5 %                                          | ± 1.0 % | With 4% ENGINE GOVERNING |
| SUSTAINED SHORT CIRCUIT | REFER TO SHORT CIRCUIT DECREMENT CURVES (page 5) |         |                          |

|                         |                                  |                          |  |
|-------------------------|----------------------------------|--------------------------|--|
| CONTROL SYSTEM          | SELF EXCITED                     |                          |  |
| A.V.R.                  | AS440                            |                          |  |
| VOLTAGE REGULATION      | ± 1.0 %                          | With 4% ENGINE GOVERNING |  |
| SUSTAINED SHORT CIRCUIT | WILL NOT SUSTAIN A SHORT CIRCUIT |                          |  |

|                                                     |                                                                                      |                         |
|-----------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------|
| INSULATION SYSTEM                                   | CLASS H                                                                              |                         |
| PROTECTION                                          | IP23                                                                                 |                         |
| RATED POWER FACTOR                                  | 0.8                                                                                  |                         |
| STATOR WINDING                                      | DOUBLE LAYER LAP                                                                     |                         |
| WINDING PITCH                                       | TWO THIRDS                                                                           |                         |
| WINDING LEADS                                       | 12                                                                                   |                         |
| STATOR WDG. RESISTANCE                              | 0.0079 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED                                  |                         |
| ROTOR WDG. RESISTANCE                               | 1.77 Ohms at 22°C                                                                    |                         |
| EXCITER STATOR RESISTANCE                           | 17 Ohms at 22°C                                                                      |                         |
| EXCITER ROTOR RESISTANCE                            | 0.092 Ohms PER PHASE AT 22°C                                                         |                         |
| R.F.I. SUPPRESSION                                  | BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. refer to factory for others |                         |
| WAVEFORM DISTORTION                                 | NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%                            |                         |
| MAXIMUM OVERSPEED                                   | 2250 Rev/Min                                                                         |                         |
| BEARING DRIVE END                                   | BALL. 6220 (ISO)                                                                     |                         |
| BEARING NON-DRIVE END                               | BALL. 6314 (ISO)                                                                     |                         |
|                                                     | 1 BEARING                                                                            | 2 BEARING               |
| WEIGHT COMP. GENERATOR                              | 1393 kg                                                                              | 1395 kg                 |
| WEIGHT WOUND STATOR                                 | 657 kg                                                                               | 657 kg                  |
| WEIGHT WOUND ROTOR                                  | 563 kg                                                                               | 535 kg                  |
| WR <sup>2</sup> INERTIA                             | 8.0068 kgm <sup>2</sup>                                                              | 7.7289 kgm <sup>2</sup> |
| SHIPPING WEIGHTS in a crate                         | 1485 kg                                                                              | 1485 kg                 |
| PACKING CRATE SIZE                                  | 166 x 87 x 124 (cm)                                                                  | 166 x 87 x 124 (cm)     |
| TELEPHONE INTERFERENCE                              | THF<2%                                                                               | TIF<50                  |
| COOLING AIR                                         | 1.312 m³/sec 2780 cfm                                                                |                         |
| VOLTAGE SERIES STAR                                 | 600V                                                                                 |                         |
| VOLTAGE PARALLEL STAR                               | 300V                                                                                 |                         |
| VOLTAGE SERIES DELTA                                | 346V                                                                                 |                         |
| kVA BASE RATING FOR REACTANCE VALUES                | 644                                                                                  |                         |
| Xd DIR. AXIS SYNCHRONOUS                            | 2.96                                                                                 |                         |
| X'd DIR. AXIS TRANSIENT                             | 0.14                                                                                 |                         |
| X''d DIR. AXIS SUBTRANSIENT                         | 0.10                                                                                 |                         |
| Xq QUAD. AXIS REACTANCE                             | 2.41                                                                                 |                         |
| X''q QUAD. AXIS SUBTRANSIENT                        | 0.26                                                                                 |                         |
| X <sub>L</sub> LEAKAGE REACTANCE                    | 0.05                                                                                 |                         |
| X <sub>2</sub> NEGATIVE SEQUENCE                    | 0.19                                                                                 |                         |
| X <sub>0</sub> ZERO SEQUENCE                        | 0.09                                                                                 |                         |
| REACTANCES ARE SATURATED                            |                                                                                      |                         |
| VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED |                                                                                      |                         |
| T'd TRANSIENT TIME CONST.                           | 0.08 s                                                                               |                         |
| T''d SUB-TRANSTIME CONST.                           | 0.012 s                                                                              |                         |
| T'do O.C. FIELD TIME CONST.                         | 2.2 s                                                                                |                         |
| Ta ARMATURE TIME CONST.                             | 0.018 s                                                                              |                         |
| SHORT CIRCUIT RATIO                                 | 1/Xd                                                                                 |                         |

HCI534D/544D

**STAMFORD**

Winding 17

SX

Locked Rotor Motor Starting Curves



OC

MX




# HCI534D/544D


## Winding 17

**STAMFORD**

### THREE PHASE EFFICIENCY CURVES

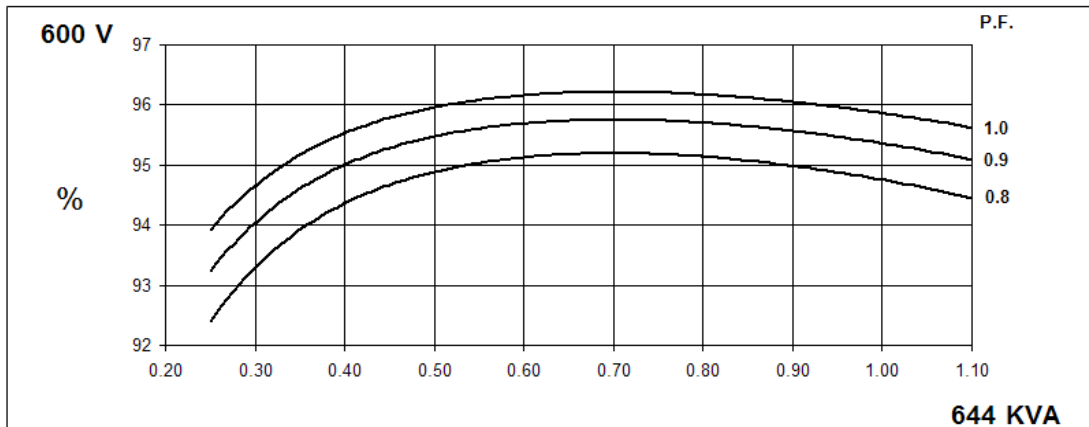

Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed  
Based on star (wye) connection.

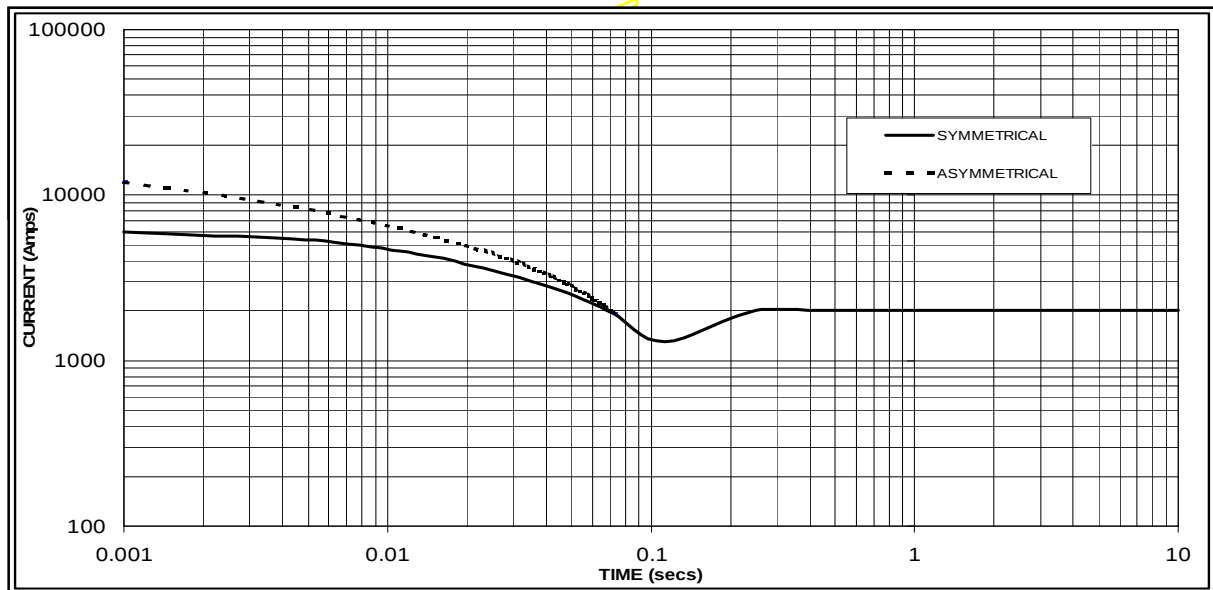

Sustained Short Circuit = 2000 Amps

#### Note

The following multiplication factor should be used to convert the values from curve for the various types of short circuit :

|                         | 3-phase | 2-phase L-L | 1-phase L-N |
|-------------------------|---------|-------------|-------------|
| Instantaneous           | x 1.00  | x 0.87      | x 1.30      |
| Minimum                 | x 1.00  | x 1.80      | x 3.20      |
| Sustained               | x 1.00  | x 1.50      | x 2.50      |
| Max. sustained duration | 10 sec. | 5 sec.      | 2 sec.      |

All other times are unchanged

# HCI534D/544D

## Winding 17 / 0.8 Power Factor

**STAMFORD**




**60Hz**

### RATINGS

| Class - Temp Rise | Cont. F - 105/40°C | Cont. H - 125/40°C | Standby - 150/40°C | Standby - 163/27°C |
|-------------------|--------------------|--------------------|--------------------|--------------------|
| Series Star (V)   | 600                | 600                | 600                | 600                |
| Parallel Star (V) | 300                | 300                | 300                | 300                |
| Series Delta (V)  | 346                | 346                | 346                | 346                |
| kVA               | 588                | 644                | 675                | 694                |
| kW                | 470                | 515                | 540                | 555                |
| Efficiency (%)    | 95.0               | 94.8               | 94.6               | 94.5               |
| kW Input          | 495                | 544                | 571                | 587                |

APPROVED

### DIMENSIONS

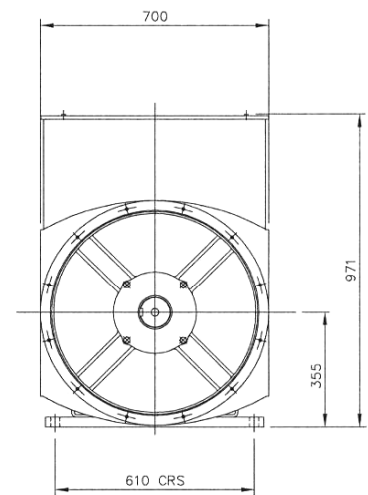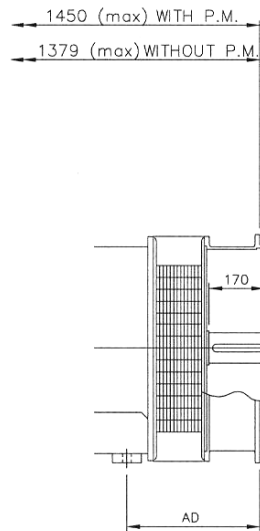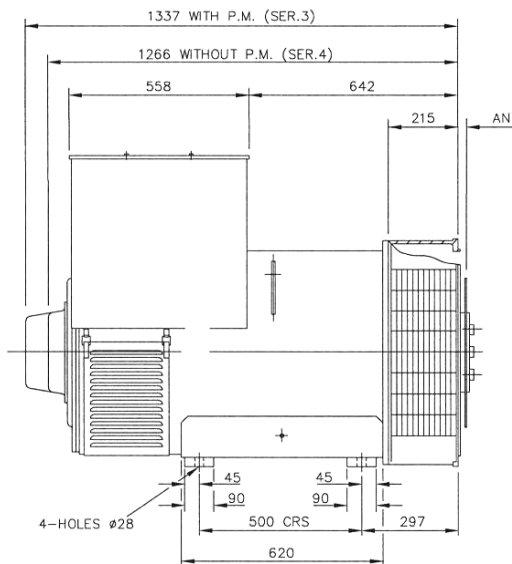

| COUPLING DISC | AN    |
|---------------|-------|
| SAE 14        | 25,4  |
| SAE 18        | 15,87 |
| SAE 21        | 0     |

| ADAPTOR | AD  |
|---------|-----|
| SAE 00  | 410 |
| SAE 0   | 410 |
| SAE 1/2 | 390 |
| SAE 1   | 390 |

APPROVED DOCUMENT

**STAMFORD**

Head Office Address:  
Barnack Road, Stamford  
Lincolnshire, PE9 2NB  
United Kingdom  
Tel: +44 (0) 1780 484000  
Fax: +44 (0) 1780 484100

[www.cumminsgeneratortechnologies.com](http://www.cumminsgeneratortechnologies.com)

Copyright 2010, Cummins Generator Technologies Ltd, All Rights Reserved  
Stamford and AvK are registered trade marks of Cummins Generator Technologies Ltd  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.

# DSE7410/20

## AUTO START & AUTO MAINS FAILURE MODULES

### FEATURES



The DSE7410 is an Auto Start Control Module and the **DSE7420** is an Auto Mains (Utility) Failure Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

A sophisticated module monitoring an extensive number of engine parameters, the DSE74xx will announce warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LED, remote PC, audible alarm and via SMS text alerts. The module includes RS232, RS485 & Ethernet ports as well as dedicated terminals for system expansion.

The DSE7400 Series modules are compatible with electronic (CAN) and non-electronic (magnetic pick-up/alternator sensing) engines and offer a comprehensive number of flexible inputs, outputs and extensive engine protections so the system can be easily adapted to meet the most demanding industry paralleling requirements.

The modules can be easily configured using the DSE Configuration Suite Software. Selected front panel editing is also available.

### ENVIRONMENTAL TESTING STANDARDS

#### ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2  
EMC Generic Immunity Standard for the Industrial Environment  
BS EN 61000-6-4  
EMC Generic Emission Standard for the Industrial Environment

#### ELECTRICAL SAFETY

BS EN 60950  
Safety of Information Technology Equipment, including Electrical Business Equipment

#### TEMPERATURE

BS EN 60068-2-1  
Ab/Ae Cold Test -30 °C  
BS EN 60068-2-2  
Bb/Be Dry Heat +70 °C

#### VIBRATION

BS EN 60068-2-6  
Ten sweeps in each of three major axes  
5 Hz to 8 Hz @ +/-7.5 mm,  
8 Hz to 500 Hz @ 2 gn

#### HUMIDITY

BS EN 60068-2-30  
Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours  
BS EN 60068-2-78  
Cab Damp Heat Static 40 °C @ 93% RH 48 Hours


#### SHOCK

BS EN 60068-2-27  
Three shocks in each of three major axes  
15 gn in 11 ms

#### DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

BS EN 60529  
IP65 - Front of module when installed into the control panel with the supplied sealing gasket.

## COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF GEN-SET APPLICATIONS

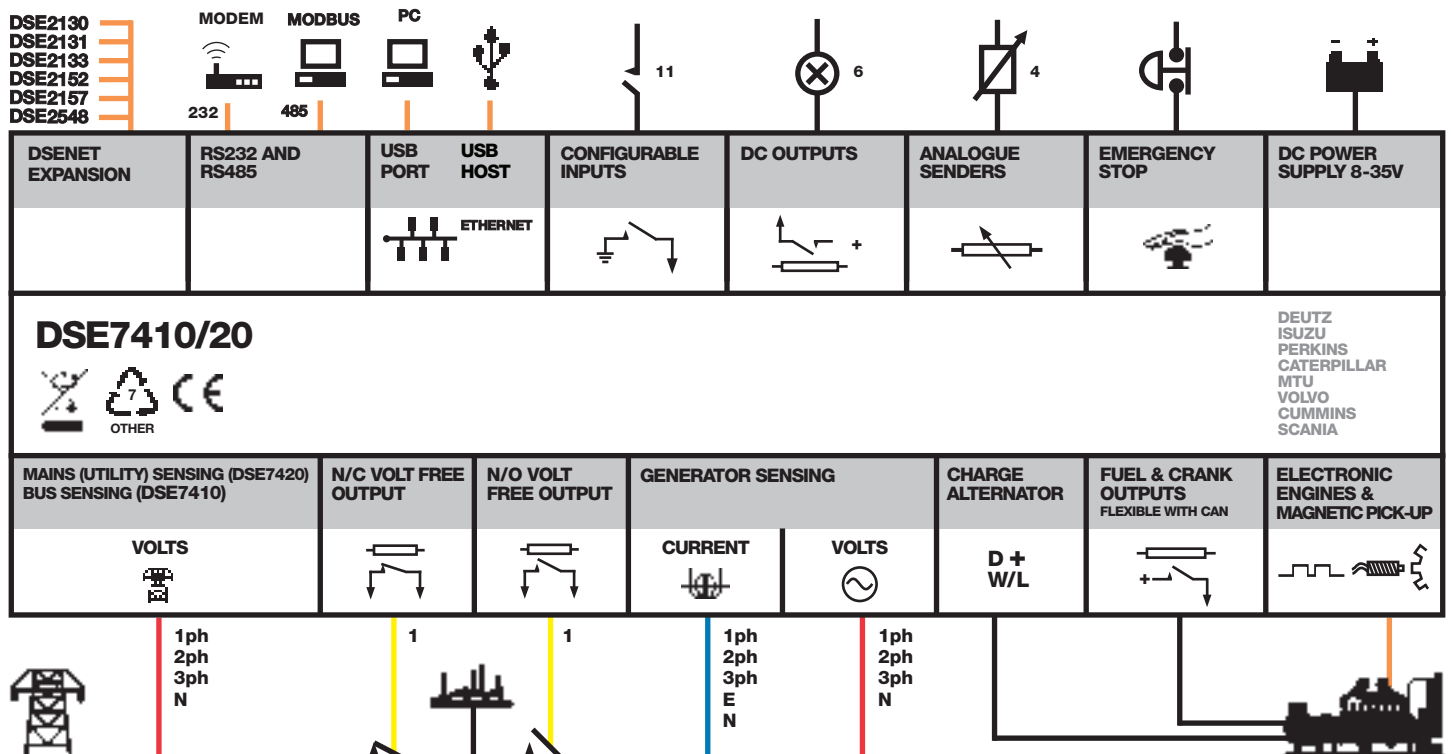

# DSE7410/20

## AUTO START & AUTO MAINS FAILURE MODULES

### FEATURES



### DSE7420

### DSE7410



### KEY FEATURES

- Configurable inputs (11)
- Configurable outputs (8)
- Voltage measurement
- Mains (utility) failure detection
- Dedicated load test button
- kW overload alarms
- Comprehensive electrical protection
- RS232, RS485 & Ethernet remote communications
- Modbus RTU/TCP
- PLC functionality
- Multi event exercise timer
- Back-lit LCD 4-line text display
- Multiple display languages
- Automatic start/Manual start
- Audible alarm
- Fixed and flexible LED indicators
- Event log (250)
- Engine protection
- Fault condition notification to a designated PC
- Front panel mounting
- Protected front panel programming
- Configurable alarms and timers
- Configurable start and stop timers

- Five key menu navigation
- Front panel editing with PIN protection
- 3 configurable maintenance alarms
- CAN and magnetic pick-up/Alt. sensing
- Fuel usage monitor and low fuel alarms
- Charge alternator failure alarm
- Manual speed control (on compatible CAN engines)
- Manual fuel pump control
- "Protections disabled" feature
- Reverse power protection
- Power monitoring (kW h, kV Ar, kV A h, kV Ar h)
- Load switching (load shedding and dummy load outputs)
- Automatic load transfer (DSE7420)
- Unbalanced load protection
- Independent earth fault trip
- Fully configurable via DSE Configuration Suite PC software
- Configurable display languages
- Remote SCADA monitoring via DSE Configuration Suite PC software

- Advanced SMS messaging (additional external modem required)
- Start & stop capability via SMS messaging
- Additional display screens to help with modem diagnostics
- DSENet® expansion
- Integral PLC editor

### KEY BENEFITS

- RS232, RS485 & Ethernet can be used at the same time
- DSENet® connection for system expansion
- PLC functionality
- Five step dummy load support
- Five step load shedding support
- High number of inputs and outputs
- Worldwide language support
- Direct USB connection to PC
- Ethernet monitoring
- USB host
- Data logging & trending

### RELATED MATERIALS

#### TITLE

DSE7410 Installation Instructions  
**DSE7420** Installation Instructions  
 DSE74xx Quick Start Guide  
 DSE74xx Operator Manual  
 DSE74xx PC Configuration Suite Manual

#### PART NO'S

053-085  
 053-088  
 057-162  
 057-161  
 057-160

### SPECIFICATION

#### DC SUPPLY

**CONTINUOUS VOLTAGE RATING**  
 8 V to 35 V Continuous

#### CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries

#### MAXIMUM OPERATING CURRENT

260 mA at 12 V, 130 mA at 24 V

#### MAXIMUM STANDBY CURRENT

120 mA at 12 V, 65 mA at 24 V

#### CHARGE FAIL/EXCITATION RANGE

0 V to 35 V

#### OUTPUTS

##### OUTPUT A (FUEL)

15 A DC at supply voltage

##### OUTPUT B (START)

15 A DC at supply voltage

##### OUTPUTS C & D

8 A AC at 250 V AC (Volt free)

##### AUXILIARY OUTPUTS E,F,G,H,I & J

2 A DC at supply voltage

#### GENERATOR

##### VOLTAGE RANGE

15 V to 333 V AC (L-N)

##### FREQUENCY RANGE

3.5 Hz to 75 Hz

#### MAINS (UTILITY) (DSE7420)

##### VOLTAGE RANGE

15 V to 333 V AC (L-N)

##### FREQUENCY RANGE

3.5 Hz to 75 Hz

#### BUS (DSE7410)

##### VOLTAGE RANGE

15 V to 333 V AC (L-N)

##### FREQUENCY RANGE

3.5 Hz to 75 Hz

#### MAGNETIC PICK UP

##### VOLTAGE RANGE

+/- 0.5 V to 70 V

##### FREQUENCY RANGE

10,000 Hz (max)

#### DIMENSIONS

##### OVERALL

240 mm x 172 mm x 57 mm  
 9.4" x 6.8" x 2.2"

##### PANEL CUTOUT

220 mm x 160 mm  
 8.7" x 6.3"

##### MAXIMUM PANEL THICKNESS

8 mm  
 0.3"

##### STORAGE TEMPERATURE RANGE

-40 °C to +85 °C

### DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH  
**TELEPHONE** +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303  
**EMAIL** sales@deepseapl.com **WEBSITE** www.deepseapl.com

### DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA  
**TELEPHONE** +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708  
**EMAIL** sales@deepseausa.com **WEBSITE** www.deepseausa.com

# Tmax-Molded Case Circuit Breakers

T7 1200A Frame

## AC Circuit Breakers and Switches

### 3 and 4 Pole

### Motor Circuit Protectors

### Higher Performances in Less Space

### Field Installable Accessories and Trip Units



**Dimensions** 3P Fixed Version 10.55H x 8.26W x 6.06D

**Weight** 21.4 (lbs)

## Compliance with Standards

UL 489

CSA C22.2 No.5.1

IEC 60947-2

Standards

EC directive:

– “Low Voltage Directives” (LVD) no. 73/23 EEC

– “Electromagnetic Compatibility Directive” (EMC) no.89/336 EEC

The ABB Quality System complies with the international ISO 9001 - 2000 Standard (model for quality assurance in design, development, construction, and installation and service) and with the equivalent European EN ISO 9001 and Italian UNI EN ISO 9001 Standards

| Interrupting ratings (RMS sym. kAmps) |      | T7       |          |          |
|---------------------------------------|------|----------|----------|----------|
| Continuous Current Rating             |      | 1200     |          |          |
| Number of Poles                       |      | 3-4      |          |          |
|                                       |      | <b>S</b> | <b>H</b> | <b>L</b> |
| AC                                    |      |          |          |          |
|                                       | 240V | 65       | 100      | 150      |
|                                       | 480V | 50       | 65       | 100      |
|                                       | 600V | 25       | 50       | 65       |

## Company Quality Systems and Environmental Systems

The new Tmax series has a hologram on the front, obtained using special anti-imitation techniques, which guarantees the quality and that the circuit breaker is an original ABB product.

Attention to protection of the environment and to health and safety in the work place is another priority commitment for ABB and, as confirmation of this, the company environmental management system has been certified by RINA in 1997, in conformity with the international ISO 14001 Standard. This certification has been integrated in 1999 with the Management System for Health and Safety in the workplace, according to OHSAS 18001 (British Standards), obtaining one of the first certification of integrated management System, QES (Quality, Environment,

Safety) issued by RINA. ABB - the first industry in the electro-mechanical section in Italy to obtain this recognition - thanks to a revision of the production process with an eye to ecology has been able to reduce the consumption of raw materials and waste from processing by 20%. ABB's commitment to safeguarding the environment is also shown in a concrete way by the Life Cycle Assessments of its products carried out directly by the ABB Research and Development in collaboration with the ABB Research Center. Selection of materials, processes and packing materials is made optimizing the true environmental impact of the product, also foreseeing the possibility of its being recycled.

### Mounting

Fixed  
Drawout

### Connections

Busbar connection or compression lugs  
Pressure-type terminals for bare cables  
Rear connections

### Trip Unit

PR231/P, PR232/P, PR331DS, and PR332DS/P electronic trip unit

### Auxiliary Devices for Indication and Control

- Auxiliary contacts - AUX
- Undervoltage release - UVR
- Shunt trip - SOR
- Terminal covers
- Padlock provision - PLL
- Direct rotary handle - RHD
- Key lock - KLF
- Early auxiliary contact - AUE
- Transmitted rotary handle - RHE
- Front extended terminal - EF
- Front terminal for copper-aluminum - FC CuAl
- Front extended spread terminal - ES
- Rear orientated terminal - R
- Phase separators
- Residual current relay (IEC Only)



#### ABB Inc.

1206 Hatton Road  
Wichita Falls, TX 76302  
For more information and  
the location of your local  
field office please go to  
[www.abb-control.com](http://www.abb-control.com)

Annex to the  
technical catalog



## Tmax T8

Low voltage molded case  
circuit breaker up to 3000 A

UL 489 and CSA C22.2 Standard

1SDC210026D0201 – 2008 Edition



**ABB**

---

## Main characteristics

---

The Tmax family, conforming to the UL 489 and CSA C22.2 No. 5.1 Standards, is enriched with the Tmax T8 size, which allows 3000 A to be reached. Also available in the 1600 A, 2000 A and 2500 A frames, Tmax T8 is equipped with the same electronic trip units as Tmax T7, thereby guaranteeing extremely high performances able to satisfy all installation requirements. Adequately sized for the performances offered (W=16.8 / D=11.2 / H=15.0 in). Tmax T8 is able to interrupt the following short-circuit currents: 125 kA@480 V and 100 kA@600 V.



# Main characteristics

## General characteristics

The Tmax T8 size has both circuit breakers and molded case switches (MCS). The following tables show the main characteristics of these ranges.

### Circuit breakers for power distribution

|                               |                  |              | Tmax T8             |
|-------------------------------|------------------|--------------|---------------------|
| Frame size                    |                  | [A]          | 1600/2000/2500/3000 |
| Number of poles               |                  | [No]         | 3/4                 |
| Rated voltage                 | (AC) 50-60 Hz    | [V]          | 600                 |
|                               | (DC)             | [V]          | –                   |
| Test voltage (1 min) 50-60 Hz |                  | [V]          | 3000                |
| Interrupting ratings          |                  | [kA rms]     | V                   |
|                               | 240 V AC         | [kA rms]     | 125                 |
|                               | 480 V AC         | [kA rms]     | 125                 |
|                               | 600 V AC         | [kA rms]     | 100                 |
| Trip units                    | Electronic       | PR232/P-T8   | ■                   |
|                               |                  | PR331/P      | ■                   |
|                               |                  | PR332/P      | ■                   |
| Dimensions fixed version (3p) | H                | [in-mm]      | 15.0 - 382          |
|                               | W                | [in-mm]      | 16.8 - 427          |
|                               | D                | [in-mm]      | 11.2 - 282          |
| Mechanical life               |                  | [operations] | 15000               |
| Weight (fixed 3p)             | 1600/2000/2500 A | [lbs]        | 161                 |
|                               | 3000 A           | [lbs]        | 236                 |

### Molded case switches (MCS)

The Tmax T8 MCS are derived from the corresponding circuit breakers, of which they keep the overall dimensions, the versions, the fixing systems and the possibility of mounting accessories unchanged. This version only differs from the circuit breakers in the absence of the protection trip units. All molded case switches comply with the UL 489 and CSA C22.2 Standards and are self-protected.

|                   |               |      | Tmax T8V-D     |
|-------------------|---------------|------|----------------|
| Rating            |               | [A]  | 2000/2500/3000 |
| Poles             |               | [No] | 3/4            |
| Magnetic override |               | [A]  | 40000          |
| Rated voltage     | AC (50-60 Hz) | [V]  | 600            |
|                   | DC            | [V]  | –              |

# Digital Linear Chargers

## Specifications (cont.)

- New 4-color package design



minnkotamotors.com

**minn KOTA**

**ON-BOARD MARINE BATTERY CHARGER**

DIGITALLY CONTROLLED 2X FASTER CHARGING PROTECTS BATTERIES


**Digital<sup>±</sup> CONTROL**

**MK210D**

**10AMPS**

**MK 210D**  
2 CHARGING BANKS  
5 AMPS PER BANK  
10 AMPS TOTAL OUTPUT

MADE IN THE USA FC

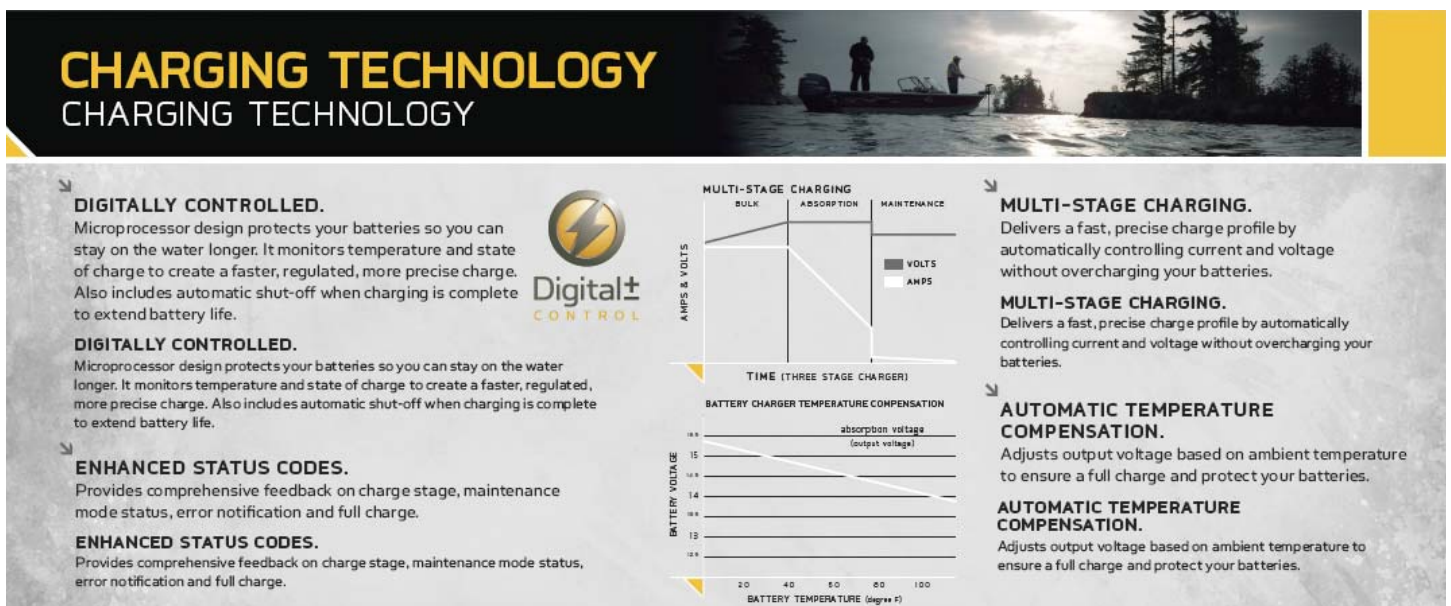

## CHARGING TECHNOLOGY

### CHARGING TECHNOLOGY

**DIGITALLY CONTROLLED.**  
Microprocessor design protects your batteries so you can stay on the water longer. It monitors temperature and state of charge to create a faster, regulated, more precise charge. Also includes automatic shut-off when charging is complete to extend battery life.

**DIGITALLY CONTROLLED.**  
Microprocessor design protects your batteries so you can stay on the water longer. It monitors temperature and state of charge to create a faster, regulated, more precise charge. Also includes automatic shut-off when charging is complete to extend battery life.

**ENHANCED STATUS CODES.**  
Provides comprehensive feedback on charge stage, maintenance mode status, error notification and full charge.

**ENHANCED STATUS CODES.**  
Provides comprehensive feedback on charge stage, maintenance mode status, error notification and full charge.

**Digital<sup>±</sup> CONTROL**

**MULTI-STAGE CHARGING**

AMPS & VOLTS

TIME (THREE STAGE CHARGER)

BATTERY CHARGER TEMPERATURE COMPENSATION

BATTERY VOLTAGE

BATTERY TEMPERATURE (degrees F)

**MULTI-STAGE CHARGING.**  
Delivers a fast, precise charge profile by automatically controlling current and voltage without overcharging your batteries.

**MULTI-STAGE CHARGING.**  
Delivers a fast, precise charge profile by automatically controlling current and voltage without overcharging your batteries.

**AUTOMATIC TEMPERATURE COMPENSATION.**  
Adjusts output voltage based on ambient temperature to ensure a full charge and protect your batteries.

**AUTOMATIC TEMPERATURE COMPENSATION.**  
Adjusts output voltage based on ambient temperature to ensure a full charge and protect your batteries.

2010

**minn KOTA**

**HUMMINBIRD**

**CANNON**

# Digital Linear Chargers

## Specifications

- Waterproof, shock-and vibration-resistant aluminum construction
- Saltwater tested and fully corrosion-resistant
- Short circuit, reverse polarity, and ignition protected
- For use with 12V/6 cell batteries that are flooded/wet cell, maintenance free or starved electrolyte (AGM) only
- FCC compliant
- UL listed to marine standard 1236
- 3 year warranty
- Replaces all existing current on-board chargers (excluding portables)
- No Price Increase
- Availability: November 2010





### DIGITAL LINEAR ON-BOARD CHARGERS

| PRODUCT CODE | PRODUCT DESCRIPTION        |
|--------------|----------------------------|
| 1821065      | MK 106D (1 bank x 6 amps)  |
| 1821105      | MK-110D (1 bank x 10 amps) |
| 1822105      | MK-210D (2 bank x 5 amps)  |
| 1823155      | MK-315D (3 bank x 5 amps)  |
| 1822205      | MK-220D (2 bank x 10 amps) |
| 1823305      | MK-330D (3 bank x 10 amps) |
| 1824405      | MK-440D (4 bank x 10 amps) |
| 1822305      | MK-230D (2 bank x 15 amps) |
| 1823455      | MK-345D (3 bank x 15 amps) |
| 1824605      | MK-460D (4 bank x 15 amps) |

2010





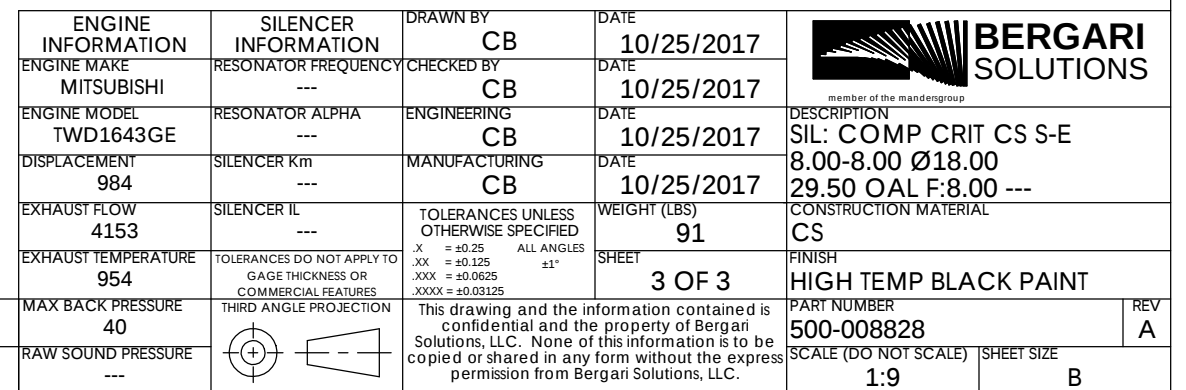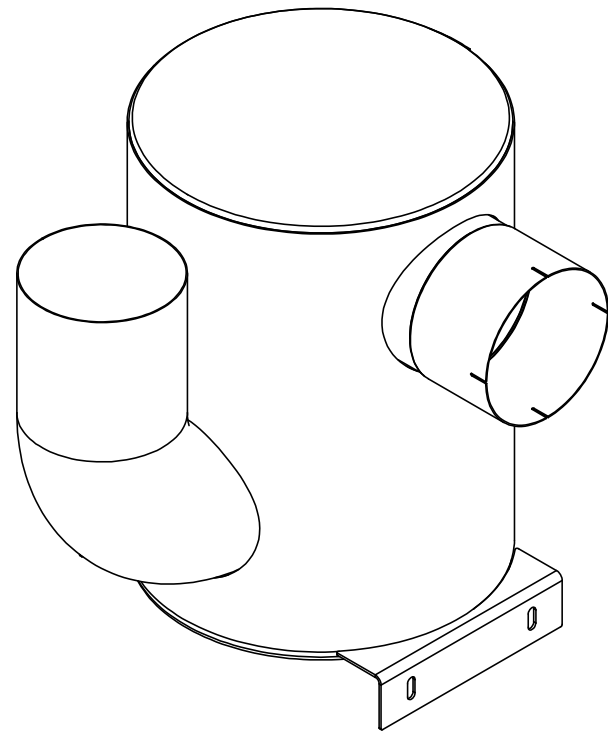


|                 |                     |      |    |            |                 |     |
|-----------------|---------------------|------|----|------------|-----------------|-----|
|                 |                     | REV. | BY | DATE       | DESCRIPTION     | ECO |
| CUSTOMER<br>--- | CUSTOMER P/N<br>--- | A    | CB | 10/25/2017 | INITIAL RELEASE | --- |

# SPVD-5000 OPEN DIMENSIONAL OVERVIEW

## TOP VIEW

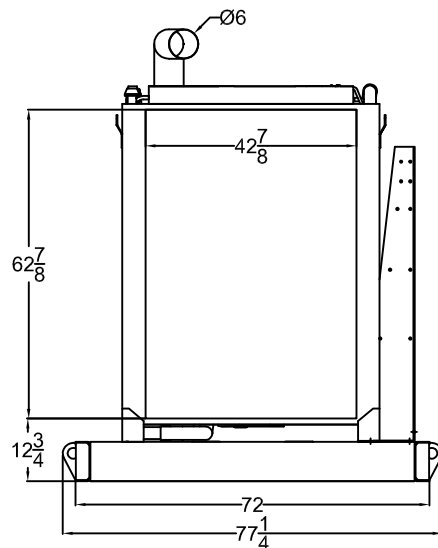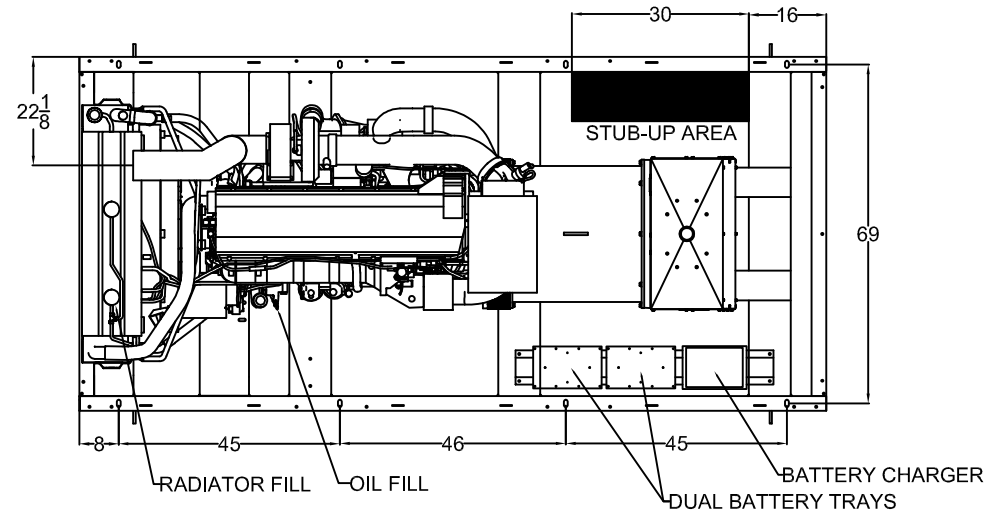

## RADIATOR VIEW

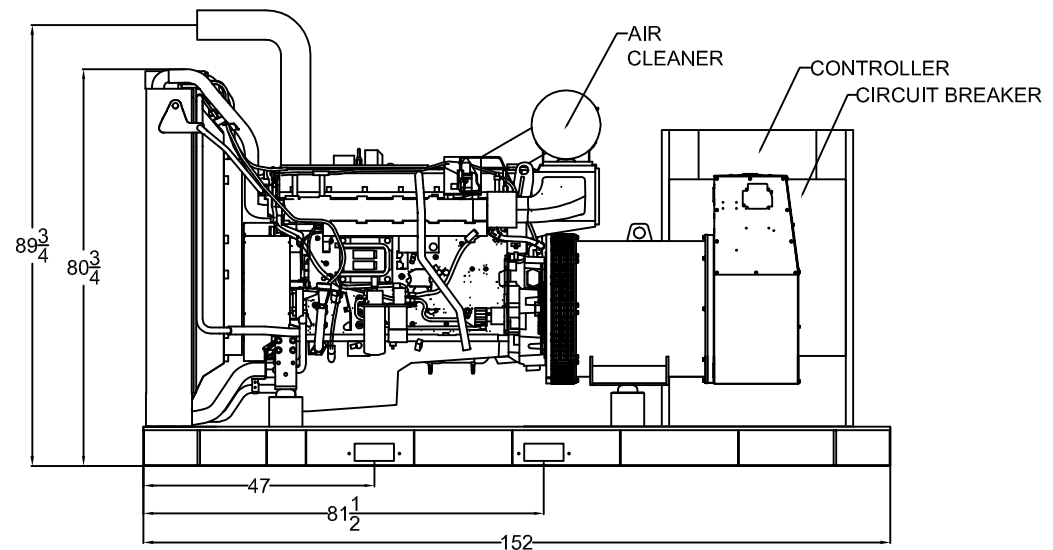


## SIDE VIEW


## LEVEL 2 ENCLOSURE OUTLINE DIMENSIONS FOR SPVD-5000 THRU SPVD-6000

## TOP VIEW


(GEN-SET HAS (6) DOORS, (3) SHOWN OPEN ARE TYPICAL FOR BOTH SIDES)

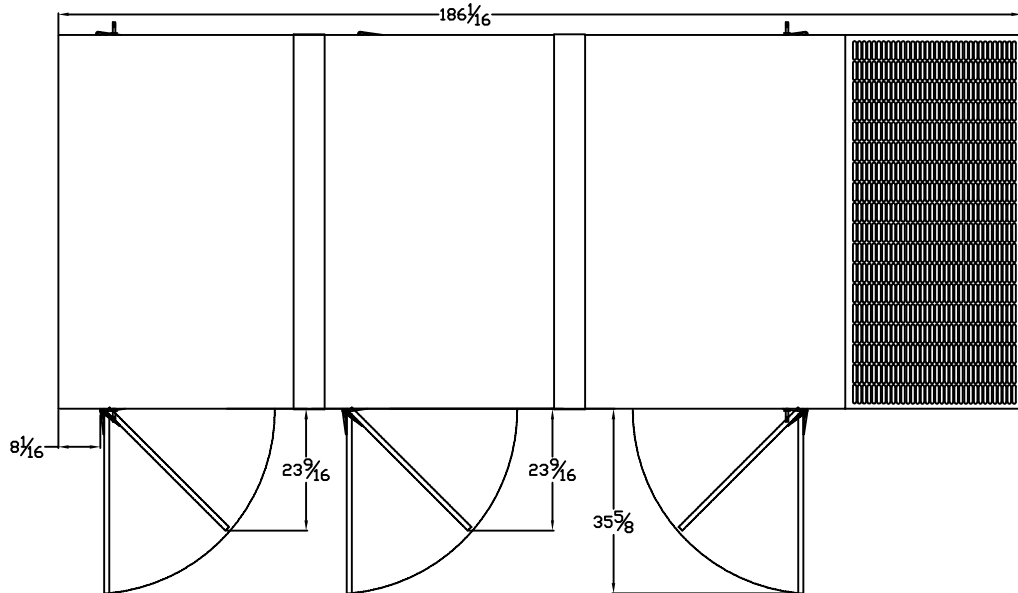


## FRAME VIEW

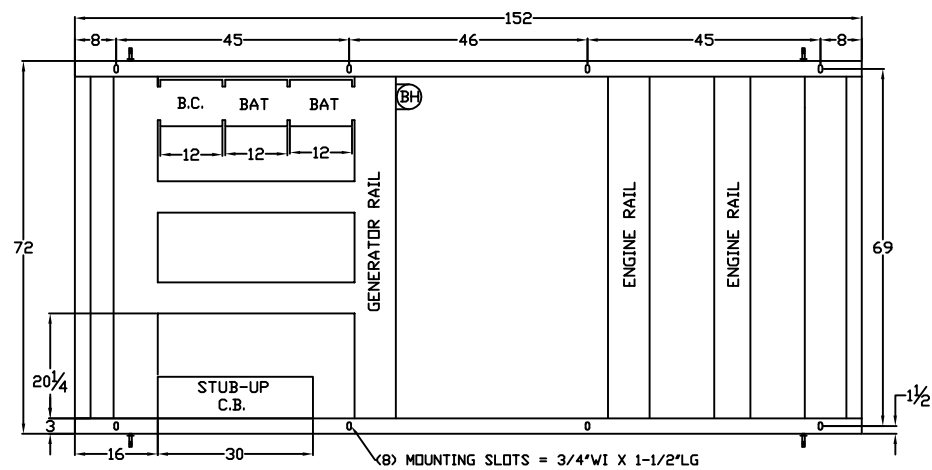


## GENERATOR END VIEW

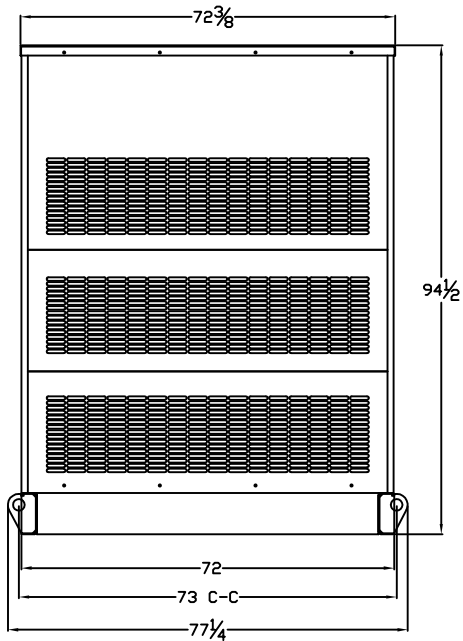

## SIDE VIEW

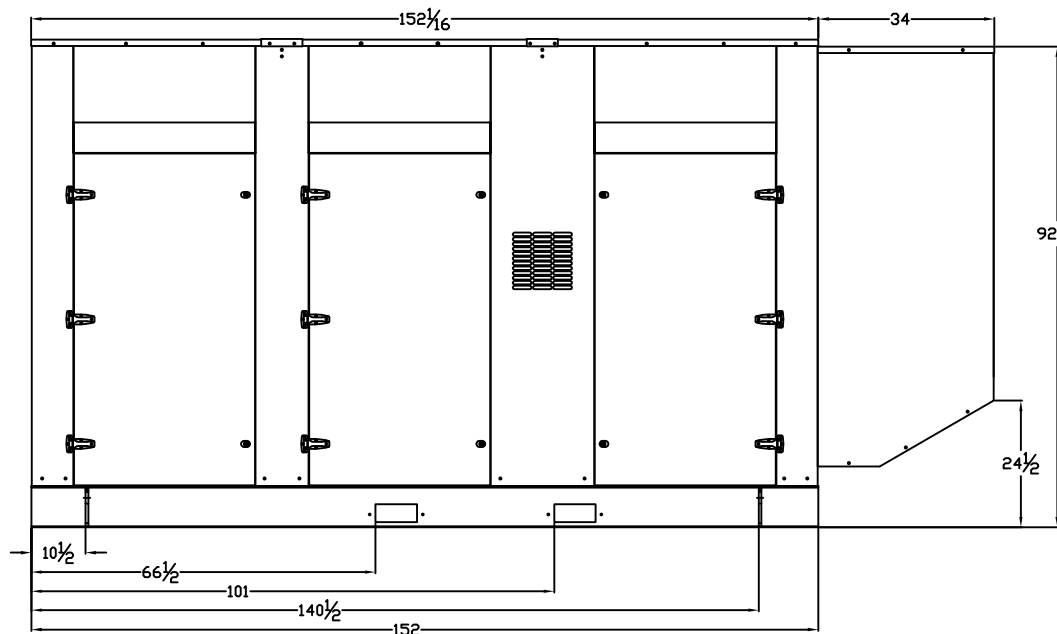


### RADIATOR END VIEW

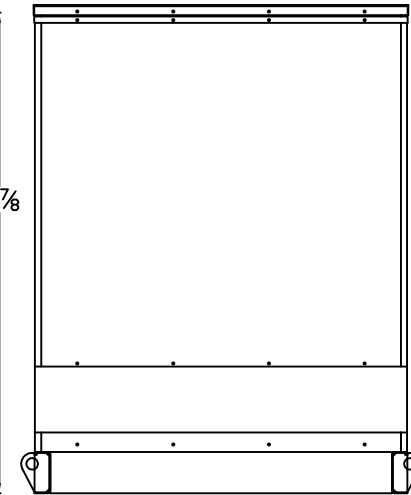


# SPVD-5000 GEN-SET MOUNTED ON DOUBLE WALL SUB-BASE TANK

## SPVD-5000 LEVEL 2 ENCLOSURE

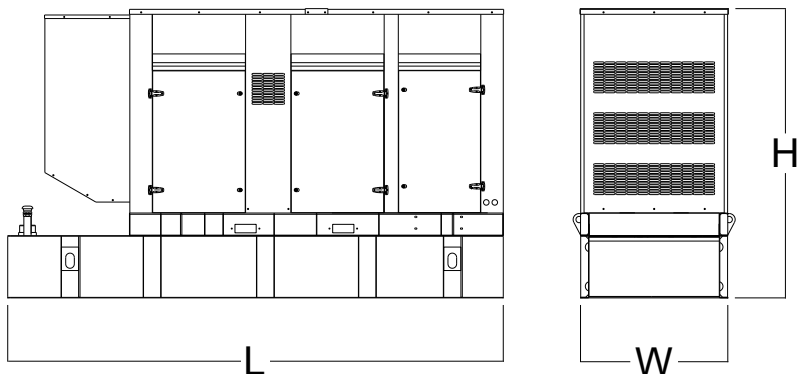

| RUN TIME HOURS | USABLE CAPACITY |       | L   | W  | H   | STUB UP | WT.   |
|----------------|-----------------|-------|-----|----|-----|---------|-------|
|                | GAL.            | LTR.  |     |    |     |         |       |
| NO TANK        | -               | -     | 186 | 72 | 95  | -       | 11200 |
| 26             | 958             | 3626  | 218 | 72 | 119 | 40      | 14064 |
| 53             | 1959            | 7415  | 268 | 72 | 131 | 40      | 15586 |
| 79             | 2938            | 11121 | 379 | 72 | 131 | 40      | 17463 |
| 96             | 3533            | 13374 | 446 | 72 | 131 | 40      | 18627 |

## SPVD-5000 LEVEL 3 ENCLOSURE

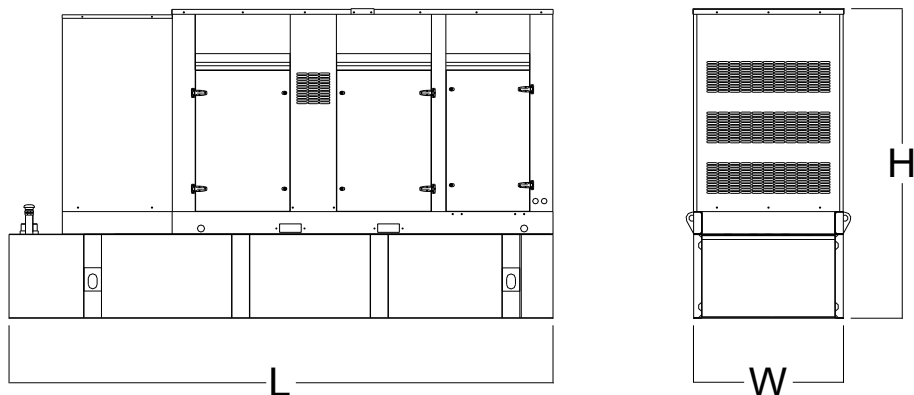

| RUN TIME HOURS | USABLE CAPACITY |       | L   | W  | H   | STUB UP | WT.   |
|----------------|-----------------|-------|-----|----|-----|---------|-------|
|                | GAL.            | LTR.  |     |    |     |         |       |
| NO TANK        | -               | -     | 200 | 72 | 95  | -       | 12200 |
| 26             | 958             | 3626  | 218 | 72 | 119 | 40      | 15064 |
| 53             | 1959            | 7415  | 268 | 72 | 131 | 40      | 16586 |
| 79             | 2938            | 11121 | 379 | 72 | 131 | 40      | 18463 |
| 96             | 3533            | 13374 | 446 | 72 | 131 | 40      | 19627 |

# GILLETTE LIMITED WARRANTY

## FOR STATIONARY STANDBY EMERGENCY POWER SYSTEMS, STATIONARY PRIME POWER SYSTEMS, OR PORTABLE POWER SYSTEMS

The Gillette Generator is designed around the latest technology, manufactured and quality inspected by carefully trained and experienced craftspeople. Gillette warrants to the original end user, for the time periods as shown below, that each generator finished product is free from defects in materials and workmanship. Gillette, at its option, will repair, replace, or offer appropriate adjustments, for any generator part that, upon examination and testing by Gillette's factory engineers or by a Gillette authorized service dealer, is found to be defective, when generator set is properly installed, operated and maintained, according to Gillette's instructions. All transportation costs for parts returned to the factory, and new parts sent back to end user, are to be borne and paid by the end user. This warranty is not transferable and does not apply to malfunctions caused by damages, unreasonable use, misuse, unauthorized repair persons, or normal wear and tear. All warranty cost allowances must be within limits as shown in "Gillette Warranty Policies", procedures and flat rate manual.

### GILLETTE PRODUCT

### WARRANTY TIME PERIOD

|                                              |                                                                                                                                      |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>Portable and Standby Gen-Sets</b> .....   | <b>(2) Years or 1000 hours</b> (whichever occurs first), from date of manufacture.<br>(Warranty is void in prime power applications) |
|                                              | <b>Standby:</b> First year covers parts and labor. Second year covers parts only.                                                    |
|                                              | <b>Portables:</b> First year covers parts and labor. Second year covers rotor and stator only.                                       |
| <b>BD Series</b> .....                       | <b>2 Bearing, 3600 RPM (BD Series):</b> One year covers parts only, no labor/travel.                                                 |
| <b>Prime Power (Sole power source)</b> ..... | <b>(1) Year or 1000 hours</b> (whichever occurs first), from date of manufacture.                                                    |

### THIS WARRANTY SHALL NOT APPLY TO (AND NOT LIMITED TO) THE FOLLOWING:

- Normal engine wear, tune-ups, service parts, including batteries, fuses, and engine fluids.
- Generators in trailer mounted use.
- Original installation or start-up costs.
- Damage due to insect or rodent infestation.
- Gen-sets that are altered from original design.
- Radiators replaced rather than repaired.
- Failures beyond manufacturers control: Riots, wars, theft, fire, freezing, lightning, earthquake, windstorm, hail, flood, hurricane, and all other external causes and Acts of God.
- Any incidental, consequential, or indirect damages, caused by manufacturers defects, or any delay in repair or replacement of defect.
- Costs due to trouble shooting with jobsite repair person, where no defect is found.
- Costs for equipment (cranes, hoist, trucks) for removal or re-installation of gen-set.
- Adjustments to fuel systems or governor systems at time of start-up, or anytime thereafter.
- Excess mileage costs are not permitted. Authorized service provider is limited to 200 mile round trip.
- Diesel engine damage due to constant light loads (wet stacking).
- Travel expense on any portable generators.
- Any labor time that is deemed excessive, by factory.
- Overtime labor and overnight freight costs.
- Steel enclosures, and all other deterioration of parts, installed within 25 miles of saltwater contaminants.
- Failures due, but not limited to, normal wear, misuse, negligence, or faulty installations, such as in-adequate fuel lines or gas pressures.
- Travel or labor expenses and all other costs, incurred while investigating performance complaints, unless problem is caused by defective materials or workmanship by Gillette.
- Warranties of associated equipment, not of Gillette manufacture (auto transfer switches, engines, generators) are subject to the individual manufacturers assigned warranties.
- Failure to use and exercise gen-set for long periods of time.
- Parts installed from sources other than engine or generator manufacturer.
- Manufacturer is not responsible for loose connections caused by vibrations during shipment to jobsite. All connections must be checked during start-up.
- All shipments are F.O.B. factory, consigned to the transit carrier. All shipping damage repairs, are between carrier and receiver.
- Any associated costs for replacing components, found to be defective.
- Rental costs of equipment during any warranty procedures.
- Room and board expense due to overnight service conditions.

Any implied or statutory warranty, including any other warranty as to the merchant ability or fitness for a particular purpose or use, is expressly limited to the duration of this warranty. Some states do not allow limitations on how long an implied warranty may last, or the exclusion or limitation of incidental or consequential damages, so the above listing of limitations or exclusions, may not apply to you.

This is our written limited warranty and we make no other expressed warranty. No other identity is authorized to make any different or additional warranties on Gillette's behalf. This Gillette warranty gives you specific rights. You may have additional rights that may vary from state to state.

**GILLETTE GENERATORS, INC.**  
2921 THORNE DRIVE • ELKHART, IN 46514

WARRANTY SERVICE PH: 800-777-9639  
WARRANTY SERVICE FAX: 574-262-1840  
WEBSITE: [www.gillettegenerators.com](http://www.gillettegenerators.com)