

ZAXIS 75US-5 EXCAVATOR

20-Aug-2020

Code	Description	Qty	List Price(USD)
2471FF	ZAXIS 75US-5 EXCAVATOR	1	\$129,413.00

Option Codes

3265	Rubber Crawler Pads	1	No Added Cost
7060	2.12 M (6 Ft. 11 In.) Arm Assembly with Bucket Cylinder and Linkage	1	\$6,791.00

Field Installed Attachments

BYT1103	24 IN (610 mm), 0.33 yd3 (0.25 M3) Heavy-Duty Bucket		
4	(Pin-on Bucket)	1	\$1,581.00

Total **\$137,785.00**


Manufacturer's Suggested List Price shown. Retail prices may vary by dealer. Unless stated otherwise, taxes, freight, setup, delivery and other dealer specific charges not included in the pricing. Options/items noted with anything other than price will have additional costs. Pricing, availability, and specifications subject to change without notice. Special program pricing may be available on certain models. See dealer for details. Prices shown are in U.S. dollars and valid only in the U.S.

Engine	ZX75US-5		
Manufacturer and Model	Yanmar 4TNV98C		
Non-Road Emission Standard	EPA Final Tier 4/EU Stage IV		
Net Power (ISO 9249)	42.4 kW (56.9 hp) @ 2,000 rpm		
Cylinders	4		
Displacement	3.3 L (202 cu. in.)		
Aspiration	Natural		
Off-Level Capacity	70% (35 deg.)		
Cooling			
Variable-speed fan; viscous clutch			
Powertrain			
2-speed propel with automatic shift			
Maximum Travel Speed			
Low	3.1 km/h (1.9 mph)		
High	5.0 km/h (3.1 mph)		
Drawbar Pull	6650 kgf (14,661 lb.)		
Hydraulics			
Open Center, Load Sensing			
Main Pumps	3 variable-displacement axial-piston pumps		
Maximum Pump Flow	2 x 72 + 56 L/m (2 x 19 + 15 gpm)		
Pilot Pump	1 gear		
Maximum Rated Flow	20 L/m (5.3 gpm)		
System Relief Pressure	3900 kPa (566 psi)		
System Operating Pressure			
Implement Circuits	26 000 kPa (3,771 psi)		
Travel Circuits	31 400 kPa (4,554 psi)		
Swing Circuits	25 200 kPa (3,655 psi)		
Controls	Pilot levers, short stroke, low effort; hydraulic pilot controls with shutoff lever		
Cylinders			
Heat-treated, chrome-plated, polished cylinder rods; hardened steel (replaceable bushings) pivot pins			
	Bore	Rod Diameter	Stroke
Boom (I)	115 mm (4.5 in.)	65 mm (2.6 in.)	885 mm (34.8 in.)
Arm (I)	95 mm (3.7 in.)	60 mm (2.4 in.)	900 mm (35.4 in.)
Bucket (I)	85 mm (3.3 in.)	55 mm (2.2 in.)	730 mm (28.7 in.)
Electrical			
Batteries	2 x 12 volt		
Battery Capacity	2 x 450 CCA		
Alternator Rating	50 amp		
Work Lights	2 halogen (1 mounted on boom and 1 on frame)		

ZX75US-5


Undercarriage		ZX75US-5
Rollers (each side)		
Carrier		1
Track		5
Shoes (each side)		40
Track		
Adjustment		Hydraulic
Chain		Sealed and lubricated
Swing Mechanism		
Swing Speed		10.5 rpm
Swing Torque		16 600 Nm (12,244 lb.-ft.)
Ground Pressure		
450-mm (18 in.) Rubber Crawler Pads		39 kPa (5.6 psi)
450-mm (18 in.) Continuous Rubber Belt		39 kPa (5.6 psi)
450-mm (18 in.) Triple Semi-Grouser Shoes		38 kPa (5.4 psi)
600-mm (24 in.) Triple Semi-Grouser Shoes		27 kPa (3.9 psi)
Serviceability		
Refill Capacities		
Fuel Tank		135 L (35.7 gal.)
Cooling System		9.7 L (2.6 gal.)
Engine Oil with Filter		12.3 L (3.2 gal.)
Hydraulic Tank		56 L (15 gal.)
Hydraulic System		103 L (27 gal.)
Propel Gearbox (each)		1.2 L (1.3 qt.)
Operating Weights		
With 0.31-m³ (0.41 cu. yd.), 762-mm (30 in.), 313-kg (691 lb.) Bucket; 2.12-m (6 ft. 11 in.) Arm; 1305-kg (2,877 lb.) Counterweight; 2470-mm (8 ft. 1 in.) Blade; Full Fuel Tank; and 75-kg (165 lb.) Operator		
450-mm (18 in.) Rubber Crawler Pads		8143 kg (17,952 lb.)
450-mm (18 in.) Triple Semi-Grouser Shoes		7882 kg (17,377 lb.)
600-mm (24 in.) Triple Semi-Grouser Shoes		8265 kg (18,221 lb.)
450-mm (18 in.) Continuous Rubber Belt		7898 kg (17,412 lb.)
Optional Components		
Undercarriage (with the following)		
450-mm (18 in.) Rubber Crawler Pads		2903 kg (6,400 lb.)
450-mm (18 in.) Continuous Rubber Belt		2867 kg (6,321 lb.)
450-mm (18 in.) Triple Semi-Grouser Shoes		2851 kg (6,285 lb.)
600-mm (24 in.) Triple Semi-Grouser Shoes		3025 kg (6,669 lb.)
1-Piece Boom (with arm cylinder)		497 kg (1,096 lb.)
Arm with Bucket Cylinder and Linkage		
1.62 m (5 ft. 4 in.)		238 kg (525 lb.)
2.12 m (6 ft. 11 in.)		276 kg (608 lb.)
Boom Lift Cylinders (2), Total Weight		178 kg (392 lb.)
Counterweight, Standard		1305 kg (2,877 lb.)

Operating Dimensions		ZX75US-5	
		Arm Length	Arm Length
		1.62 m (5 ft. 4 in.)	2.12 m (6 ft. 11 in.)
Arm Digging Force (ISO)		35.5 kN (7,981 lb.)	30.7 kN (6,902 lb.)
Bucket Digging Force (ISO)		46.6 kN (10,476 lb.)	46.6 kN (10,476 lb.)
A Maximum Reach		6.43 m (21 ft. 1 in.)	6.92 m (22 ft. 8 in.)
A' Maximum Reach at Ground Level		6.26 m (20 ft. 6 in.)	6.76 m (22 ft. 2 in.)
B Maximum Digging Depth		4.11 m (13 ft. 6 in.)	4.61 m (15 ft. 1 in.)
B' Maximum Digging Depth at 2.44-m (8 ft.) Flat Bottom		3.75 m (12 ft. 4 in.)	4.32 m (14 ft. 2 in.)
C Maximum Cutting Height		7.21 m (23 ft. 8 in.)	7.61 m (25 ft. 0 in.)
D Maximum Dumping Height		5.12 m (16 ft. 10 in.)	5.51 m (18 ft. 1 in.)
E Minimum Swing Radius		1.81 m (5 ft. 11 in.)	2.17 m (7 ft. 1 in.)
F Maximum Vertical Wall		3.67 m (12 ft. 0 in.)	4.22 m (13 ft. 10 in.)
G Tail Swing Radius		1.29 m (4 ft. 3 in.)	1.29 m (4 ft. 3 in.)

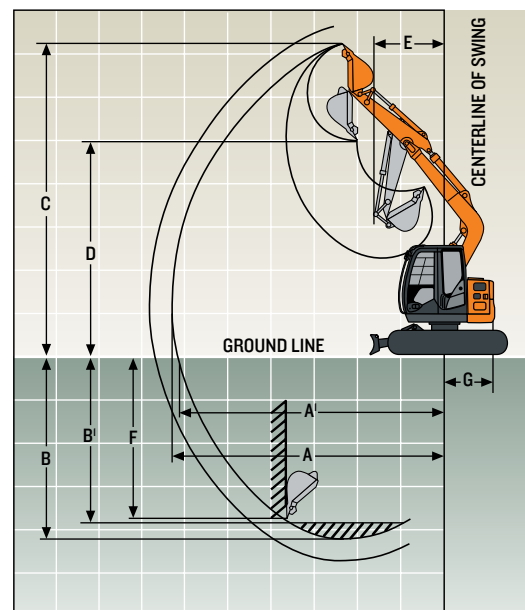

ZX75US-5

Machine Dimensions		ZX75US-5	
		Arm Length	Arm Length
A	Overall Length	1.62 m (5 ft. 4 in.)	2.12 m (6 ft. 11 in.)
B	Overall Height	6.30 m (20 ft. 8 in.)	6.37 m (20 ft. 11 in.)
C	Undercarriage Width		
	With 450-mm (18 in.) Shoes	2.32 m (7 ft. 7 in.)	
	With 600-mm (24 in.) Shoes	2.47 m (8 ft. 1 in.)	
D	Rear-End Length/Swing Radius	1.29 m (4 ft. 3 in.)	
E	Distance Between Idler/Sprocket Centerline	2.29 m (7 ft. 6 in.)	
F	Undercarriage Length	2.92 m (9 ft. 7 in.)	
G	Counterweight Clearance	0.73 m (29 in.)	
H	Cab Height	2.69 m (8 ft. 10 in.)	
I	Ground Clearance	360 mm (14 in.)	
J	Upperstructure Width	2.32 m (7 ft. 7 in.)	
K	Gauge Width	1.87 m (6 ft. 2 in.)	
L	Blade Lift Height	360 mm (14 in.)	
	Blade Height	480 mm (19 in.)	
	Blade Width		
	With 450-mm (18 in.) Shoes	2320 mm (7 ft. 7 in.)	
	With 600-mm (24 in.) Shoes	2470 mm (8 ft. 1 in.)	
M	Blade Cut Below Grade	300 mm (12 in.)	
N	Blade Lift Angle	27 deg.	
O	Track Width		
	With 450-mm (18 in.) Shoes	0.45 m (18 in.)	
	With 600-mm (24 in.) Shoes	0.60 m (24 in.)	

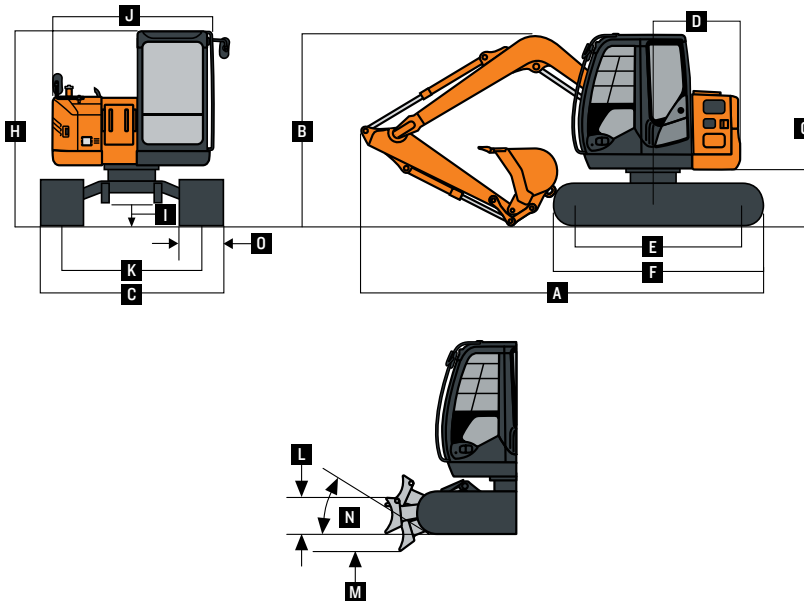

Lift Capacities

ZX75US-5

Boldface type indicates hydraulically limited capacities; **lightface type** indicates stability-limited capacities, in kg (lb.). Ratings are at bucket lift hook, using standard counterweight, situated on firm, level, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87% of hydraulic capacity or 75% of weight needed to tip machine. All lift capacities are based on ISO 10567.

Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)	
Horizontal Distance from Centerline of Rotation	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
With 3.72-m (12 ft. 8 in.) boom, 1.62-m (5 ft. 4 in.) arm, 0.28-m ³ (0.37 cu. yd.) bucket, 450-mm (18 in.) rubber pads, and 2320-mm (7 ft. 9 in.) blade								
4.5 m (15 ft.)			1616 (3,562)	1616 (3,562)				
3.0 m (10 ft.)			2223 (4,901)	2223 (4,901)	1829 (4,032)	1605 (3,539)		
1.5 m (5 ft.)			3192 (7,038)	2752 (6,067)	2121 (4,675)	1538 (3,390)		
Ground Line			3615 (7,969)	2635 (5,810)	2327 (5,131)	1486 (3,275)		
-1.5 m (-5 ft.)	4476 (9,867)	4476 (9,867)	3402 (7,500)	2634 (5,807)				
With 3.72-m (12 ft. 8 in.) boom, 2.12-m (6 ft. 11 in.) arm, 0.28-m ³ (0.37 cu. yd.) bucket, 450-mm (18 in.) rubber pads, and 2320-mm (7 ft. 9 in.) blade								
4.5 m (15 ft.)					1475 (3,252)	1475 (3,252)		
3.0 m (10 ft.)			1834 (4,043)	1834 (4,043)	1613 (3,557)	1613 (3,557)		
1.5 m (5 ft.)			2864 (6,313)	2797 (6,167)	1958 (4,317)	1541 (3,397)		
Ground Line			3508 (7,734)	2629 (5,797)	2248 (4,956)	1472 (3,246)		
-1.5 m (-5 ft.)	3544 (7,813)	3544 (7,813)	3514 (7,746)	2594 (5,718)	2252 (4,964)	1451 (3,199)		
-3.0 m (-10 ft.)	5020 (11,068)	5020 (11,068)	2742 (6,044)	2663 (5,870)				
With 3.72-m (12 ft. 8 in.) boom, 1.62-m (5 ft. 4 in.) arm, 0.28-m ³ (0.37 cu. yd.) bucket, 600-mm (24 in.) shoes, and 2470-mm (8 ft. 1 in.) blade								
4.5 m (15 ft.)			1616 (3,562)	1616 (3,562)				
3.0 m (10 ft.)			2223 (4,901)	2223 (4,901)	1829 (4,032)	1630 (3,594)		
1.5 m (5 ft.)			3192 (7,038)	2796 (6,164)	2121 (4,675)	1563 (3,446)		
Ground Line			3615 (7,969)	2679 (5,906)	2327 (5,131)	1510 (3,330)		
-1.5 m (-5 ft.)	4476 (9,867)	4476 (9,867)	3402 (7,500)	2678 (5,903)				
With 3.72-m (12 ft. 8 in.) boom, 2.12-m (6 ft. 11 in.) arm, 0.28-m ³ (0.37 cu. yd.) bucket, 600-mm (24 in.) shoes, and 2470-mm (8 ft. 1 in.) blade								
4.5 m (15 ft.)					1475 (3,252)	1475 (3,252)		
3.0 m (10 ft.)			1834 (4,043)	1834 (4,043)	1613 (3,557)	1613 (3,557)		
1.5 m (5 ft.)			2864 (6,313)	2841 (6,263)	1958 (4,317)	1566 (3,452)		
Ground Line			3508 (7,734)	2673 (5,893)	2248 (4,956)	1497 (3,301)		
-1.5 m (-5 ft.)	3544 (7,813)	3544 (7,813)	3514 (7,746)	2637 (5,814)	2252 (4,964)	1476 (3,254)		
-3.0 m (-10 ft.)	5020 (11,068)	5020 (11,068)	2742 (6,044)	2707 (5,967)				
With 3.72-m (12 ft. 8 in.) boom, 1.62-m (5 ft. 4 in.) arm, 0.28-m ³ (0.37 cu. yd.) bucket, 450-mm (18 in.) continuous rubber belt, and 2470-mm (8 ft. 1 in.) blade								
3.0 m (10 ft.)			2241 (4,940)	2241 (4,940)				
1.5 m (5 ft.)			3207 (7,070)	2608 (5,750)				
Ground Line			3620 (7,980)	2499 (5,510)	2327 (5,130)	1415 (3,120)		
-1.5 m (-5 ft.)	4527 (9,980)	4527 (9,980)	3393 (7,480)	2499 (5,510)				


ZX75US-5

Buckets ZX75US-5

A full line of buckets is offered to meet a wide variety of applications. Replaceable cutting edges are available through Hitachi Parts. Optional side cutters add 150 mm (6 in.) to bucket widths.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force (ISO)		Arm Dig Force (ISO) 1.62 m (5 ft. 4 in.)		Arm Dig Force (ISO) 2.12 m (6 ft. 11 in.)		Bucket Tip Radius		Number of Teeth
	mm	in.	m ³	cu. yd.	kg	lb.	kN	lb.	kN	lb.	kN	lb.	mm	in.	
Heavy Duty	610	24	0.24	0.31	268	591	44	9,892	34	7,545	29	6,524	883	34.76	5
	762	30	0.31	0.41	313	691	44	9,892	34	7,545	29	6,524	883	34.76	6
	914	36	0.39	0.51	358	790	44	9,892	34	7,545	29	6,524	883	34.76	7
Ditching	1219	48	0.49	0.64	330	727	64	14,344	40	8,911	33	7,473	907	35.69	0

Bucket Selection Guide*

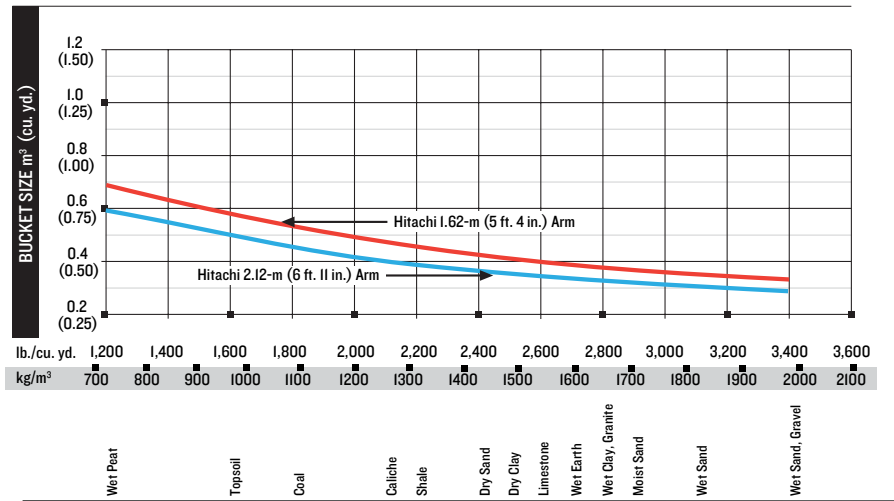

*Contact your Hitachi dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

SPECS

ADDITIONAL EQUIPMENT

Key: ● Standard ▲ Optional or special kit

75	85	Engine
●	●	Auto-idle system
●	●	Batteries (2 – 12 volt)
●	●	Coolant recovery tank
●	●	Single-element air filter
●	●	Electronic engine control
●	●	Enclosed fan guard (conforms to SAE J1308)
●	●	Engine coolant to –37 deg. C (–34 deg. F)
●	●	Fuel filter with water separator
●	●	Full-flow oil filter
●	●	Radiator and oil cooler with dust-protective net
●	●	Glow-plug start aid
●	●	500-hour engine oil-change interval
●	●	70% (35 deg.) off-level capacity
●	●	Isolation mounted
		Hydraulic System
●	●	Reduced-drift valve for boom down, arm in
●	●	Auxiliary hydraulic valve section
●	●	Spring-applied, hydraulically released automatic swing brake
●	●	5,000-hour hydraulic-oil-change interval
▲	▲	Auxiliary hydraulic lines
▲	▲	Auxiliary pilot and electric controls
▲	▲	Hydraulic filter restriction indicator kit
▲	▲	Load-lowering control device
▲	▲	Control pattern change valve
		Undercarriage
●	●	Planetary drive with axial piston motors
●	●	Propel motor shields
●	●	Spring-applied, hydraulically released automatic propel brake
●	●	2-speed propel with automatic shift
●	●	Upper carrier roller (I)
●	●	Sealed and lubricated track chain
●	●	Undercarriage with blade
▲	▲	Triple semi-grouser shoes, 450 mm (18 in.)
▲	▲	Triple semi-grouser shoes, 600 mm (24 in.)
▲	▲	Rubber crawler pads, 450 mm (18 in.)
▲	▲	Rubber belt, continuous, 450 mm (18 in.)

75	85	Upperstructure
●	●	Counterweight, 1305 kg (2,877 lb.)
●	●	Counterweight, 1408 kg (3,104 lb.)
●	●	Right- and left-hand mirrors
●	●	Vandal locks with ignition key: Cab door / Engine hood / Fuel cap / Service doors
●	●	Remote-mounted engine oil and fuel filters
		Front Attachments
●	●	Centralized lubrication system
●	●	Dirt seals on all bucket pins
●	●	Less boom and arm
●	●	Oil-impregnated bushings
●	●	Reinforced resin thrust plates
●	●	Tungsten carbide thermal coating on arm-to-bucket joint
▲	▲	Arm, 1.62 m (5 ft. 4 in.)
▲	▲	Arm, 2.12 m (6 ft. 11 in.)
▲	▲	Attachment quick-couplers
▲	▲	Buckets: Ditching / Heavy duty / Heavy-duty high capacity / Side cutters and teeth
		Operator's Station
●	●	Meets ISO 12117-2 for ROPS
●	●	Adjustable independent control positions (seat-to-pedals)
●	●	AM/FM radio
●	●	Auto climate control/air conditioner with heater and pressurizer
●	●	Built-in operator's manual storage compartment and manual
●	●	Cell-phone power outlet, 12 volt, 60 watt, 5 amp
●	●	Coat hook
●	●	Deluxe cloth suspension seat with adjustable armrests
●	●	Floor mat
●	●	Front windshield wiper with intermittent speeds
●	●	Gauges (illuminated): Engine coolant / Fuel
●	●	Horn, electric
●	●	Hour meter, electric
●	●	Hydraulic shutoff lever, all controls
●	●	Hydraulic warm-up control
●	●	Interior light
●	●	Large cup holder
●	●	Machine Information Center (MIC)

75	85	Operator's Station (continued)
●	●	Mode selectors (illuminated): Power modes (2) / Travel modes (2 with automatic shift) / Work mode (1)
●	●	Multifunction, color LCD monitor with: Diagnostic capability / Multiple-language capabilities / Maintenance tracking / Clock / System monitoring with alarm features: Auto-idle indicator, engine air cleaner restriction indicator light, engine check, engine coolant temperature indicator light with audible alarm, engine oil pressure indicator light with audible alarm, low-alternator-charge indicator light, low-fuel indicator light, fault-code alert indicator, fuel-rate display, wiper-mode indicator, work-lights-on indicator, and work-mode indicator
●	●	Motion alarm with cancel switch (conforms to SAE J994)
●	●	Auxiliary hydraulic control switches in right console lever
●	●	SAE 2-lever control pattern
●	●	Seat belt, 51 mm (2 in.), retractable
●	●	Tinted glass
●	●	Transparent tinted overhead hatch
●	●	Transparent tinted overhead window
●	●	Hot/cold beverage compartment
▲	▲	Seat belt, 76 mm (3 in.), non-retractable
▲	▲	Protection screens for cab front, rear and side
▲	▲	Window vandal-protection covers
		Electrical
●	●	50-amp alternator
●	●	Blade-type multi-fused circuits
●	●	Positive-terminal battery covers
▲	▲	ZXLink™ wireless communication system (available in specific countries; see your dealer for details)
		Lights
●	●	Work lights: Halogen / 1 mounted on boom / 1 mounted on frame

See your Hitachi dealer for further information.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan at test conditions specified per ISO 9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with standard equipment; 0.31-m³ (0.41 cu. yd.), 762-mm (30 in.), 313-kg (691 lb.) bucket; 450-mm (18 in.) rubber crawler pad shoes; 2.12-m (6 ft. 11 in.) arm; full fuel tank; and 75-kg (165 lb.) operators; a ZX75US-5 with 1305-kg (2,877 lb.) counterweight and a ZX85US-5 with a 1408-kg (3,104 lb.) counterweight.

HITACHI

hitachiconstruction.com