

SYMMETRIC LIFTS *WIDER DRIVE THRU FOR TRUCKS AND VANS*



Model shown: SPO10N700RD
Shown with optional accessories
and additional equipment

SPO10-SW Minimum Required Ceiling Height: 12' 4-3/4"

SPO10 10,000 LBS.
CAPACITY

THE PROVEN STANDARD

Trust the industry standard symmetrical 10,000 lb. lift. Why look anywhere else?

- Customize With Your Choice Of Arms and Adapters
- Performance tested to 20,000 lift cycles
- Available with SHOCKWAVE
- ALI Gold Certified



Available
with SHOCKWAVE™

SHOWN WITH:
Three-stage
flip-up adapters
with built-in
height adapters
on standard
2-stage arms



SPO10
10,000 lbs. capacity

ALSO AVAILABLE WITH

- Three-stage arms with RA Adapters / #SPO10-RA / 10,000 lbs. capacity
- Three-stage arms with Truck Adapters / SPO10-TA / 10,000 lbs. capacity

SPO12 12,000 LBS.
CAPACITY

THREE STAGE ARMS for GREATER REACH

The Rotary SPO12 sets the standard for reliability and quality in 12,000 lb. capacity lifts.

- Front & rear three-stage arms are standard
- Truck adapters with stackable inserts for added reach
- Available in alternate height configurations
- Available with SHOCKWAVE
- ALI Gold Certified



Available
with SHOCKWAVE™


Standard with three-stage
FRONT arms and polymer
truck adapters primarily
used on framed vehicles.
Adapters thread-up
or have optional
stackable inserts.



SPO12-TA
12,000 lbs. capacity



Model shown: SPO12N7TOBL
Shown with optional accessories
and additional equipment

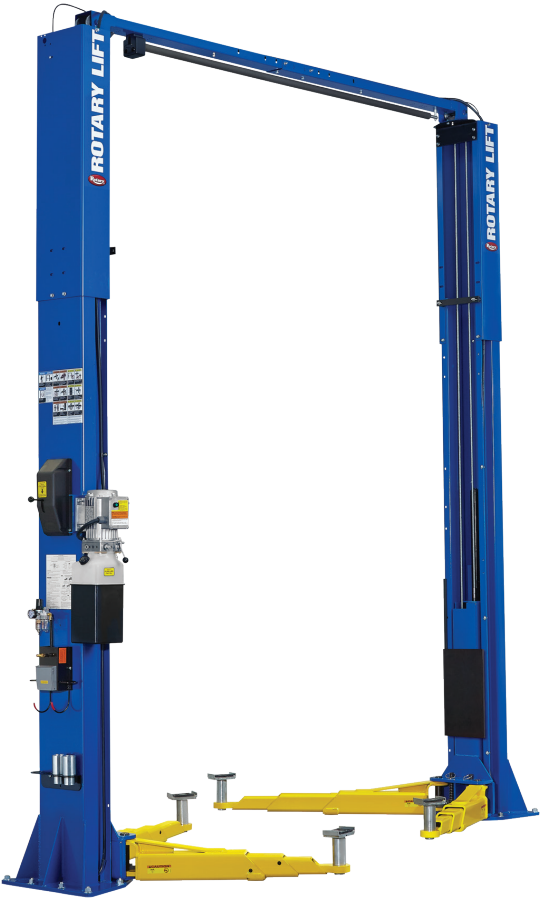

Available with
SHOCKWAVE™



SPO10
Standard Arms
Flip Up Adapters



SPO10-RA
Three-Stage Arms
Round Adapters




SPO10-TA
Three-Stage Arms
Truck Adapters



SPO12-TA
Three-Stage Arms
Truck Adapters

Model:	SHOCKWAVE Models	SPO10-SW SHOCKWAVE LIFT	SPO10-RASW SHOCKWAVE LIFT	SPO10-TASW SHOCKWAVE LIFT	SPO12-SW SHOCKWAVE LIFT
A.	Rise*	72 5/8" - 78 1/8" (1845 -1984mm)	72 1/2" - 74 3/4" (1841-1898mm)	72 5/8" - 75 5/8" (1845 -1921mm)	72 3/4" - 75 3/4" (1848 -1924mm)
	WITH SHOCKWAVE	75 5/8" - 81 1/8" (1921-2061mm)	75 1/2" - 77 3/4" (1918 -1978mm)	75 5/8" - 78 5/8" (1921-1997mm)	75 3/4" - 78 3/4" (1924 -2000mm)
B.	Height Overall: Standard	11' 8 1/2" (3569mm)	11' 8 1/2" (3569mm)	11' 8 1/2" (3569mm)	13' 8" (4166mm)
	EH1	12' 8 1/2" (3873mm)	12' 8 1/2" (3873mm)	12' 8 1/2" (3873mm)	14' 8" (4470mm)
	EH2	13' 8 1/2" (4178mm)	13' 8 1/2" (4178mm)	13' 8 1/2" (4178mm)	15' 8" (4775mm)
C.	Width Overall** (outside of base plate)	11' 5 1/2" (3493mm)	11' 5 1/2" (3493mm)	11' 5 1/2" (3493mm)	11' 5 5/8" (3496mm)
D.	Drive-Thru Clearance	102 1/2" (2603mm)	102 1/2" (2603mm)	102 1/2" (2603mm)	102 3/8" (2600mm)
E.	Floor To Overhead Switch	11' 2 3/4" (3423mm)	11' 2 3/4" (3423mm)	11' 2 3/4" (3423mm)	13' 3 1/8" (4042mm)
F.	Reach (front arm min.)	31" (787mm)	27 1/2" (699mm)	27 1/2" (699mm)	27 1/2" (699mm)
G.	Reach (front arm max.)	54" (1372mm)	59" (1499mm)	59" (1499mm)	59" (1499mm)
H.	Reach (rear arm min.)	31" (787mm)	27 1/2" (699mm)	27 1/2" (699mm)	27 1/2" (699mm)
I.	Reach (rear arm max.)	54" (1372mm)	59" (1499mm)	59" (1499mm)	59" (1499mm)
J.	Min. Adapter Height	4 5/8" (118mm)	4 1/2" (114mm)	4 5/8" (143mm)	4 3/4" (121mm)
	Max. Adapter Height	N/A	6 3/4" (171mm)	7 5/8" (194mm)	7 3/4" (197mm)
K.	Low Step Height	7" (178mm)	N/A	N/A	N/A
L.	High Step Height	10 1/4" (260mm)	N/A	N/A	N/A
M.	Inside Columns	114 1/2" (2908mm)	114 1/2" (2908mm)	114 1/2" (2908mm)	114 7/8" (2918mm)
N.	Cylinder Height at full rise*	11' 10 3/4" (3626mm)	11' 10 3/4" (3626mm)	11' 10 3/4" (3626mm)	11' 10 3/4" (3626mm)
	WITH SHOCKWAVE	12' 4 1/2" (3772mm)	12' 4 1/2" (3772mm)	12' 4 1/2" (3772mm)	12' 4 1/2" (3772mm)
	Lifting Capacity	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)	12,000 lbs. (5443kg)
	Motor / Voltage***	2 HP / 208v-230v	2 HP / 208v-230v	2 HP / 208v-230v	2 HP / 208v-230v
	WITH SHOCKWAVE	5 HP / 110v	5 HP / 110v	5 HP / 110v	5 HP / 110v
	Time of Full Rise	45 seconds	45 seconds	45 seconds	60 seconds
	WITH SHOCKWAVE	25 seconds	25 seconds	25 seconds	25 seconds
	Ceiling Height Required:				
	Standard	12' (3658mm)	12' (3658mm)	12' (3658mm)	13' 9" (4191mm)
	WITH SHOCKWAVE	12' 6" (3810mm)	12' 6" (3810mm)	12' 6" (3810mm)	13' 9" (4191mm)
	EH1	12' 10" (3912mm)	12' 10" (3912mm)	12' 10" (3912mm)	14' 9" (4496mm)
	EH2	13' 10" (4216mm)	13' 10" (4216mm)	13' 10" (4216mm)	15' 9" (4801mm)
	Max Load (per arm)	2,500 lbs. (1134kg)	2,500 lbs. (1134kg)	2,500 lbs. (1134kg)	3,000 lbs. (1360kg)
	Min. Bay Size	12' x 24' (3658 x 7315mm)	12' x 24' (3658 x 7315mm)	12' x 24' (3658 x 7315mm)	12' x 26' (3658 x 7925mm)

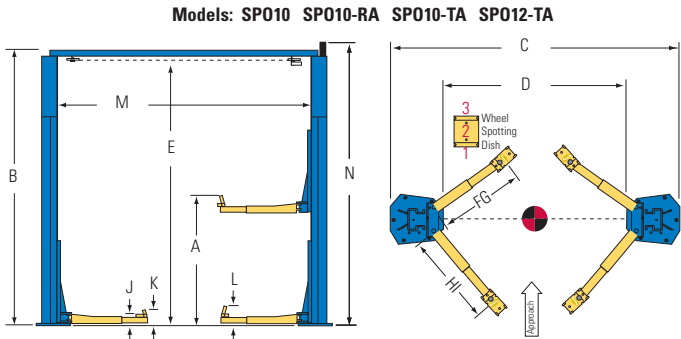

* Rise measures lowest or highest position of the supplied adapters from floor to full cylinder stroke.

** Overall heights and widths reflect standard settings. Alternate settings may be available, refer to Installation Instruction Manual or consult factory for details.

***Optional 3-phase electrical available.

Standard color of lifts are blue and red unless otherwise noted. Gray and black are available at no additional charge. Additional colors are available, consult your Rotary® representative for details.

RAL5005	RAL3002
RAL7040	RAL9005