

#### ELGIN NP FSA20-EQU 18.0 ITEM 378

QUANTITY	PART NUMBER	MODEL DESCRIPTION	
		2021 PELICAN P DUAL, TIER 4F,	
1	1120847	55KW, USA AND CANADA	
		Dual steer & gutter brooms, hydraulically driven, Tier 4F JD 4045TF low emission diesel engine, hydrostatic drive and steering, chassis and wheels powder coated standard white and including the standard features below.	

		STANDARD FEATURES	
1	0701443	PELICAN P OPERATORS MANUAL	
1	0702261	PELICAN P PARTS BOOK	
1	0730166	BROOM MEASUREMENT RULER	
1	0701708	MACHINE DELIVERY PACKET	
1	0702020	ELGIN SAFETY MANUAL	
		Air cleaner, two-stage, dry type with restriction indicator	Light, spotlight, adjustable, one per side broom
		Air conditioner	Lights, 2 combination, tail/stop lights
		Alternator, 120 amp	Lights, headlights, multiple beam
		Anti siphon water fill	Lights, low water light
		Automatic engine shutdown (oil pressure/engine temperature)	Low Hydraulic Warning
		Automatic pickup in reverse	Main broom controls in cab
		B20 biodiesel compatible	Manuals, operator and parts
		Back up alarm, electric	Mirror, inside rear view
		Battery, maintenance free	Mirrors, outside, front mounted 6" fish eyes
		Brakes, power	Mirrors, outside, front post mounted, west coast type, one each side
		Broom, main, hydraulically suspended	Parking brake with interlock
		Broom, main, in cab pressure control	Rear Camera & in cab monitor
		Broom, main, prefab, disposable	Return to sweep feature
		Broom, side broom, hydraulically suspended	Seat Belts (both sides for dual)
		Broom, side broom, in cab pressure control	Seats, extra wide cordura suspension seats with arm rests

Bumper pads, front jack	Signals, self-canceling directional with hazard switch
Coolant recovery system	Sprung guide wheel, heavy duty
Doors, see through glass, prop-able	Steering wheel, tilt and telescoping
Electronic Throttle	Sun visors
Engine, hour meter	Tachometer, diesel engine
Gauges & Warning lights:	Tires, tubeless radials
engine oil temperature	Tow loops, four
engine oil pressure	Water tank, fill gauge
fuel level	Water tank, molded polyethylene: 220 gallon total nominal capacity
speedometer & odometer w/trip set	Wheels, dual guide
Fenders, over front wheels	Wheels painted grey
Flushing system for hopper/conveyor	Window, opening front opera
Fuel tank, 35 gallons	Windshield washer
Fuel Water separator with indicator light	Windshield wipers with intermittent setting
Heater, pressurizer with filtered air, defroster	Windshield, tinted
Hose, hydrant fill, 16' 8" with coupling	

1	1087981	RED LOGO/SWOOSH	
1	1101318	LED BEACON AND GUARD ON CAB	
1	4810001	STANDARD WHITE	
	FRT-101-	FREIGHT-FLORIDA	
1	010		



# Pelican®



## PELICAN<sup>®</sup> - LEGENDARY, DEPENDABLE PERFORMANCE.

To assure that the legendary Elgin Pelican continues to meet the needs of its customers and the industry, Elgin Sweeper raised the bar again and set a new benchmark for the industry standard. Based on a design that has been continually improved since 1914, the newest Pelican model combines maneuverability, economy, serviceability, and single-lane dumping with a sweep system that easily handles heavy, compacted dirt and bulky debris, as well as smaller particles found in the street. If you need an all-around sweeper with incredible digging power the Pelican is the perfect solution.

- Isolation-mounted cab for cleaner, guieter, more comfortable operation
- Improved 360° visibility
- Incredible ease of operation
- Superior durability, stability, and maneuverability
- Easy access for service and maintenance

Customized with your choice of options, the Pelican is a durable, reliable answer to your sweeper needs.



Elgin Sweeper doesn't offer just one sweeping technology - we take an applicationbased approach to solving our customers sweeping needs. Our team works with each customer to ensure that you get a machine that fits your specifications, with the right chassis, engine configuration, fuel requirements and options.



Elgin Sweepers are built for clean, backed for life. Throughout the life of the sweeper, we offer training to your team on proper use and maintenance. We have a world-wide network of experienced dealers with factory trained technicians and a local stock of OEM parts and accessories, to ensure total customer peace of mind.

The Pelican has roots dating back to 1914 and has been continuously improved in design and production. Elgin sweepers are manufactured in an ISO:9001 certified manufacturing plant. Products are painted prior to assembly and quality tested. Elgin Pelicans are proudly assembled in the U.S.A. using only the finest materials.





#### UNIQUE SINGLE-ENGINE THREE-WHEEL DESIGN

The durable purpose-built chassis features a compact frame to maximize maneuverability and position the load low and between front wheels for stability. The high steering angle and tight turning radius allow sweeping extremely close to obstacles and following curb lines.

#### POWERFUL BROOM SYSTEM

Hydraulically-driven free-floating side and main brooms work as a system to sweep material from the curb and street into the debris hopper. Side brooms protrude up to 13 in (330 mm) beyond the tire to capture more curb debris. The large main broom features variable-speed and down-pressure to adapt to changing conditions and follow road contours.

#### **NO-JAM CONVEYOR**

No-Jam Conveyor: The Pelican's standard No-Jam chevron belt conveyor features angled molded-in full width cleats that carry more large debris as well as small fines efficiently into the hopper. The chevron belt provides improved hopper loading, better belt tracking, superior debris pick-up, reduced sticking and quieter operation than other belts. Material loads to the front and center first to allow maximum use of the hopper capacity.

#### 360° VISIBILITY AND OPERATOR ERGONOMICS

The Pelican's isolation-mounted cab provides a clean, quiet, and comfortable environment for the operator. Filtered fresh air conditioning and heater/defroster come standard. Large windows, see-through doors, and full-width windshield allow for 360° degree visibility.

#### **EASY MAINTENANCE**

Access to service points is simple with most accessible from ground-level. O-ring face seal hydraulic fittings are used and the electrical system features snap-together connections and color-coded wires for quick identification. The unit is equipped with a combination of in-cab and site gauges to monitor fluid levels.

#### **ECOINFUSED® TECHNOLOGY**

Elgin Sweeper has made advancing the use of cleaner, safer, and more efficient technologies for sweeping roads and streets a priority, with innovations that provide the powerful performance, fuel economy and overall value our municipal and contractor customers demand. Today's environmentally efficient Pelican is designed with exclusive EcoInfused Technology, representing years of unmatched innovation and success combining the science of horsepower management with the ability to do more with less.







Technology

## DURABLE, RELIABLE, AND EASY TO USE



#### **DURABLE, PURPOSE-BUILT CHASSIS**

The Pelican's heavy-duty construction and compact frame ensures a tight turning radius and years of reliable, low-maintenance operation. A balanced design provides stable sweeping and dumping. The hopper load is positioned low between the two front wheels for stability and safety. The axle support and hopper lift system are integral parts of the chassis.

#### **OUTSTANDING MANEUVERABILITY**

The Pelican's high steering angle and tight turning radius allows for quick turns, sweeping extremely close to obstacles and following curbs without climbing or scuffing tires. The dual-tire guide wheel increases stability and steering traction.

#### EFFICIENT, COMFORTABLE CAB

The clean, quiet and spacious isolation-mounted cab features large windows, wide see-through doors and a full-width windshield for 360° visibility. The center console is easily accessed from both left and right driving positions. Fingertip controls include illuminated and graphically identified gauges and rocker switches.

#### **REAR SUSPENSION**

Swing-arm suspension with twin parallel heavy-duty shock absorbing spring coils and an integrated single coil rubber spring assist provide effective suspension dampening through the entire range of travel. The design enhances ride quality and comfort in the cab while reducing stress on the sweeper frame – especially when operating in pothole conditions or on rough, uneven roads.

#### SINGLE ENGINE POWERED

The Pelican is powered by the John Deere 4045T 4.5L, 4-cylinder turbocharged diesel engine. The engine is capable of operating on bio-diesel up to B20.

#### LOW-MAINTENANCE DRIVE SYSTEM

With a unique wheel motor design for outstanding power and minimal maintenance, steep grades are no problem. Integrated sensors precisely measure road speed and adjust power requirements according to the load.

#### **HEAVY-DUTY BRAKE SYSTEM**

The Pelican features twin-caliper (ea), power disc brakes and a dynamic braking design that significantly reduces wear on service brakes. All brake components are easy to access and economical to maintain.

#### HYDRAULIC SWEEP SYSTEM

Controlled by engine RPM and operated independently of direction and ground speed, the Pelican's broom speed provides digging power at slow or zero ground speeds. A foot pedal controls speed and sweeper direction through the hydrostatic transmission.









## SUPERIOR MECHANICAL SWEEPER DESIGN





The 35 in x 66 in (889 mm x 1676 mm) hydraulically driven polypropylene main broom features variable speed (variable with engine RPM) for optimal sweeping in changing conditions. To protect the broom mechanism, the broom raises automatically when the sweeper is reversed and is returned to its sweep position and previously set down pressure when a forward direction is resumed.

#### **SIDE BROOM**

Hydraulically driven side brooms are rugged construction, 36 in (914 mm) in diameter and protrude up to 13 in (330 mm) beyond the outside of the tire while sweeping to capture more gutter debris.

#### **NO-JAM DEBRIS CONVEYOR**

The standard conveyor system features a chevron belt with angled molded-in full width cleats that moves material to the center of the belt for less spill over, and throws it to the center of the hopper for improved hopper fill without jamming. New poly/nylon high-strength belt material on the conveyor delivers long wear for maximum uptime. An optional built-in washdown provides quick and easy clean-up.

#### VARIABLE HEIGHT FRONT DUMP HOPPER

The Pelican's front dump hopper is ideal for single-lane dumping, which ensures minimal traffic interruption. The hopper can be dumped from ground level up to 9 ft 6 in (2895 mm) high. The load can be easily observed from the cab by lifting and rolling the hopper. The hopper's 3.5 cu yd (2.7 cu m), 9,000 lb (4082 kg) capacity provides maximum sweep time. For easy inspection, the hopper rolls out and rests on the ground.



#### CORROSION-RESISTANT WATER SYSTEM

A corrosion-resistant polyethylene water tank supplies the dust suppression system with 220 gallons (833 L) of water. The exclusive Elgin water pump can run dry without damaging the machine's water system. For convenience and ease of maintenance, a water-level gauge is visible from the cab.

#### EASE OF MAINTENANCE

Easy servicing lowers ownership costs and increases sweeper usage. O-ring face seal hydraulic fittings assure leak-free connections, while the electrical system's weatherproof snap-together connectors and stamped color-coded wires allow quick identification. To ensure easy monitoring of fluid levels, the hydraulic tank directly behind the cab features a sight glass inspection tube.

#### **MEMORY SWEEP®**

Elgin's exclusive Memory Sweep feature allows the operator to resume all previous sweeper settings, even broom tilt if so equipped, with one touch control. This feature enhances operator productivity and reduces operator fatigue. Memory Sweep incorporates a multi-screen display that indicates engine hours and water tank level as well as system diagnostics. This screen also displays optional features such as broom tilt angle and broom hours.



### WATERLESS PELICAN



The Pelican with optional dry dust control maintains all the popular features and sweeping performance that have made the Pelican the best selling three-wheel sweeper–without the use of water for dust suppression. This means increased pick-up of fine particles over traditional, wet dust control sweepers, proven reliable year-round sweeping and significant water conservation.

#### DRY DUST CONTROL SYSTEM

The Pelican with dry dust control features a patented system that includes a dust skirting system, dust separator in the hopper, and a dust control fan with a maintenance-free filter, working together to control fugitive dust without the use of spray water. The Pelican's waterless dust control system means operators sweep more and spend less time filling tanks enhancing productivity. Without water, mud doesn't build up on components, reducing clean-up time at the end of the shift. Since there is no water, sweeping in freezing weather conditions is possible which helps meet the growing demand for quick pick-up of winter-time road sand, salt, and cinders. Perhaps the most important benefits are those for the environment including a smaller water footprint, as well as reduced road silt that can be left as a film from waterbased dust control sweepers.



#### PATENTED FILTRATION SYSTEM

The powerful vacuum system on the sweeper creates an air stream through the debris hopper, conveyor, and skirted areas. The inward rushing air carries the airborne dust into the debris hopper where it's allowed to settle out with the rest of the swept debris. A majority of the fugitive dust falls into the hopper with only a fraction of the dust making it to the filter. When the filter becomes loaded, it can be mechanically cleaned with an on-board cleaning system so sweeping can continue. A long life, low maintenance, dry filter element is installed between the debris hopper and the fan.

\*Industrial Pelican Option Available - consult factory for details.

### **OPTIONAL ENHANCEMENTS**



LIGHTING PACKAGES A variety of lighting packages are available for the Pelican to enhance safety and visibility.



LIFELINER<sup>®</sup> HOPPER SYSTEM The LifeLiner system is a specially designed hopper liner and finish system that greatly improves the life, durability, and functionality of a sweeper hopper.



LIMB GUARD Heavy-duty guards surround cab and protect sweeper by guiding lowhanging tree limbs up and over the Pelican. Available in right hand, left hand, or dual configuration.

#### ADDITIONAL OPTIONS


- Auto-Lube automatic lubrication system
- Conveyor, lower roller washout
- Various dirt shoe offerings
- Air suspension seat(s)
- Cold weather start aid
- Heated/remote mirrors
- Engine pre-cleaner
- In-cab side broom tilt
  - Lower roller deflector

#### SPECIFICATIONS:

SWEEPING PATH One side broom 8 ft (2438 mm) Two side brooms 10 ft (3048 mm)

HOPPER CAPACITY Volumetric Capacity: 3.5 cu yds (2.7 cu m) TRAVEL SPEED 20 mph (32 Km/h)

WATER SPRAY SYSTEM Tank capacity: 220 gal. (833 L) ENGINE (make and type) John Deere 4045T Horsepower 74 hp (55 kW) @ 2,400 RPM Tier 4F low emission diesel \*Tier 3 model dependant

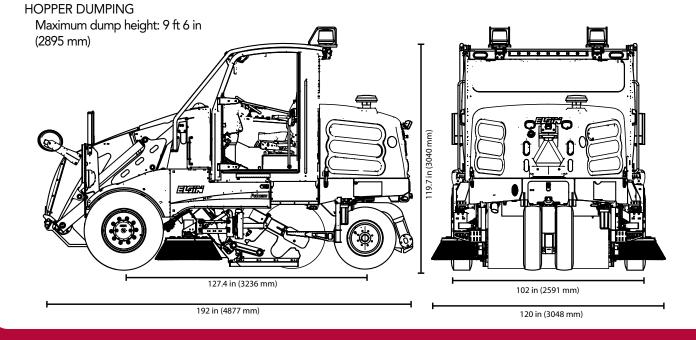



## ELGIN SWEEPER IS YOUR PARTNER...

## IN THE PLANNING

IN THE STREETS

INTO THE FUTURE Instead of one-size-fitsall solutions, we'll work with you to select the sweeping technology that fits your specific needs.

We're here to help you maintain your Elgin and train your operators to ensure the job is done right.

Our dealers don't just sell you an Elgin; they're available to answer your questions and provide service for the life of the machine.





#### WARRANTY

Elgin Sweeper Company backs the Pelican sweeper with a one-year limited warranty. The Pelican is warranted against defects in material or workmanship for a period of 12 months from the date of delivery to the original purchaser. Optional extended warranty packages are available. Consult your Elgin dealer for complete warranty information. The ESCO/FSM warranty shall not apply to major components or trade accessories such as, but not limited to, trucks, engines, hydraulic pumps and motors, tires, and batteries that have a separate warranty by the original manufacturer.

#### Your Local Elgin Dealer Is:

Specifications subject to change without notice. Some photos shown with optional equipment. Elgin® Pelican® Memory Sweep® and LifeLiner® are registered trademarks of Elgin Sweeper Company. Covered under US Patent #7,281, 296 B2 & 6,584,157 B2, and Canadian Patent #CA2475362 Effective 3/18 P/N 0705031-H Printed in U.S.A. ©2018 Elgin Sweeper Company



1300 W. Bartlett Road • Elgin, IL 60120 U.S.A. (847) 741-5370 Phone • (847) 742-3035 Fax

## LIMITED WARRANTY

Each machine manufactured by ELGIN SWEEPER COMPANY ("ESCO" or the "Company") is warranted against defects in material and workmanship for a period of 12 months provided the machine is used in a normal and reasonable manner. This limited warranty is applicable only to the original user-purchaser for a period of twelve (12) months (as measured from the date of delivery to the original user-purchaser) and is not transferable.

During the Limited Warranty Period ESCO will cause to be repaired or replaced, as the Company may elect, any part or parts of such machine that the Company's examination discloses to be defective in material or workmanship. Repairs or replacements are to be made at the selling Elgin distributor's location or at other locations approved by ESCO.

The ESCO Limited Warranty shall not apply to:

- 1. Major components or trade accessories such as but not limited to, trucks, engines, hydraulic pumps and motors, tires and batteries that have a separate warranty by the original manufacturer.
- 2. Normal adjustments and maintenance services.

3. Normal wear parts such as but not limited to, brooms, oils, fluids, filters, broom wire, shoe runners, rubber deflectors and suction hoses.

4. Failures resulting from the machine being operated in a manner or for a purpose not recommended by ESCO.

5. Repairs, modifications or alterations without the express written consent of ESCO, which in the Company's sole judgment, have adversely affected the machine's stability, operation or reliability as originally designed and manufactured.

6. Items subject to misuse, negligence, accident or improper maintenance.

\*NOTE\* The use in the product of any part other than parts approved by ESCO may invalidate this warranty. ESCO reserves the right to determine, in its sole discretion, if the use of non-approved parts operates to invalidate the warranty. Nothing contained in this warranty shall make ESCO liable for loss, injury, or damage of any kind to any person or entity resulting from any defect or failure in the machine.

TO THE EXTENT LIMITED BY LAW, THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

This warranty is also in lieu of all other obligations or liabilities on the part of ESCO, including but not limited to, liability for incidental and consequential damages on the part of the Company or the seller. ESCO makes no representation that the machine has the capacity to perform any functions other than as contained in the Company's written literature, catalogs or specifications accompanying delivery of the machine. No person or affiliated company representative is authorized to alter the terms of this warranty, to give any other warranties or to assume any other liability on behalf of ESCO in connection with the sale, servicing or repair of any machine manufactured by the Company.

ESCO reserves the right to make design changes or improvements in its products without imposing any obligation upon itself to change or improve previously manufactured products.

ELGIN SWEEPER COMPANY 1300 W. Bartlett Road Elgin, Illinois 60120

