

FSA 2020/2021 Contract - OPTIONS					
Dealer	Brand	Model	Model #	Description	Option \$
GTPB	Ferris	F160Z	5901517	Downgrade Option - 48" Deck with 24HP Kawasaki Engine	\$ (2,825)
GTPB	Ferris	F160Z	5901519	Downgrade Option - 52" Deck with 28HP Vanguard EFI Engine	\$ (2,492)
GTPB	Ferris	F210Z	5901653	Downgrade Option - 61" Deck with 28HP Vanguard EFI Engine w/ Oil Guard	\$ (1,452)
GTPB	Ferris	ISX2200	5901843	Downgrade Option - 52" Deck with 28HP Vanguard EFI Engine w/ Oil Guard and Suspension	\$ (238)
GTPB	Ferris	F320Z	5901644	Upgrade Option - 61" Deck with 37HP Vanguard EFI Engine w/ Oil Guard	\$ 282
GTPB	Ferris	F320Z	5901646	Upgrade Option - 72" Deck with 37HP Vanguard EFI Engine w/ Oil Guard	\$ 906
GTPB	Ferris	ISX3300	5901855	Upgrade Option - 61" Deck with 37HP Vanguard EFI Engine w/ Oil Guard and Suspension	\$ 2,049
GTPB	Ferris	ISX3300	5901856	Upgrade Option - 72" Deck with 37HP Vanguard EFI Engine w/ Oil Guard and Suspension	\$ 2,531
GTPB	Ferris	IS2600Z	5901475	Upgrade Option - 61" Deck with 24HP Yanmar Diesel Engine and Suspension	\$ 4,357

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



F160Z Zero Turn Mower

PROFESSIONAL FEATURES FOR AN AFFORDABLE PRICE

The Ferris® F160Z comes equipped with serious features. This compact and powerful zero-turn is designed to get you in and out of your jobs quickly and confidently. You'll find the twin 5.5 gallon rugged fuel tanks, for a total capacity of 11-gallons, to keep you productive on the job site all day.

Starting at \$8,299.00[^]

FIND A DEALER (/na/en_us/support/dealer-locator.html)

Features

Menu ▾

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



Affordable Power

Now available with a Briggs & Stratton® Vanguard™ 810cc engine, which delivers uncompromised power at an affordable price.



iCD™ Cutting System

The iCD™ Cutting System was engineered to produce the best possible cut in a multitude of conditions.



Accessibility

Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.

Menu ▾

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS

Feature



Commercial Transmission

Dual, commercial Hydro-Gear® ZT-4400™ Transaxles deliver power and durability



Foot-Operated Deck Lift

Foot-operated deck lift, with adjustable pedal, can change cut height in 1/4" increments from 1.5" - 5".



Premium Seat

Suspension seat for optimal comfort.

Menu ▾

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS




Traction

Large 24" drive tires allow for greater traction, smoother ride and improved curb climbing performance.



Ride-On Mower Warranties†

4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Belts, tires, brake pads, battery, blades: 90 days.

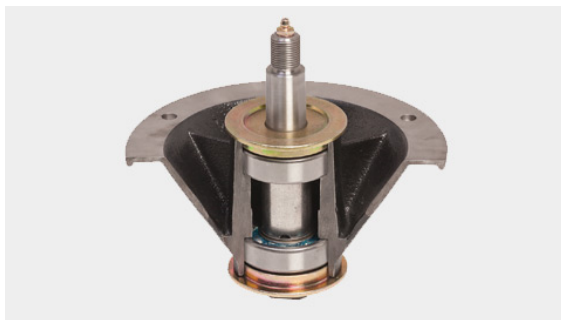

Cast-Iron Spindles

Longer usable life, 1" shaft with top access grease fitting for greaseable dual ball bearings, six-bolt 8" flange design adds strength and

OVERVIEW

See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

FEATURES

SPECIFICATIONS

Specifications

ATTACHMENTS

☐

5901516

☒

5901517

☐

5901518

☒

5901519

RELATED PRODUCTS

Model Number	5901517	5901519
Engine Brand	Kawasaki® FX730V	Vanguard™ 810cc EFI
Engine Power Rating *	23.5 gross hp	28 gross hp
Displacement (cc)	726	810
PTO	Electric	Electric
Cylinders	2	2
Starter	Electric	Electric
Fuel Tank Capacity (gal)	11	11
Cutting Width (in)	48	52
Cutting Height (in)	1.5 - 5	1.5 - 5
Spindles	Aluminum	Cast-Iron

OVERVIEW
Suspension

N/A

N/A

FEATURES
TransmissionDual commercial Hydro-Gear®
ZT-4400™ Transaxles with 8.3"
cooling fansDual commercial Hydro-Gear®
ZT-4400™ Transaxles with 8.3"
cooling fans

SPECIFICATIONS

ATTACHMENTS

Drive Axles (in)

1.375 Tapered

1.375 Tapered

RELATED PRODUCTS

Caster Tires (in)

13 x 6.5-6 Flat-free

13 x 6.5-6 Flat-free

Drive Tires (in)

24 x 9.5-12

24 x 9.5-12

Ground Speed-Fwd (mph)

0-10

0-10

Ground Speed-Rev (mph)

0-5

0-5

Overall Length (in)

78

78

Overall Width (in) Deflector
Down/Deflector Up

61.5 / 51

67 / 54

Dry Weight (lbs)

997


1111

Seat Package

Premium suspension mid-back
with adjustable arm rests,
adjustable fore and aft
positioningPremium suspension mid-back
with adjustable arm rests,
adjustable fore and aft
positioning

Instrumentation/Hour Meter

Fuel level gauge in each tank,
hour meterFuel level gauge in each tank,
hour meter

Menu 	Feature	
	Standard, 180° foldable	Standard, 180° foldable
OVERVIEW		
Controls / Safety Group	Seat activated engine kill,	Seat activated engine kill,
FEATURES	clutch safety switch, neutral	clutch safety switch, neutral
	and parking brake safety	and parking brake safety
SPECIFICATIONS	circuit, adjustable twin	circuit, adjustable twin
	steering controls	steering controls
ATTACHMENTS		
Parking Brake / Safety Circuit	Internal transaxle	Internal transaxle
RELATED PRODUCTS		
Warranty (Engine) †	3-Year limited manufacturer's warranty	3-Year limited manufacturer's warranty
Warranty (Balance of Machine) †	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coverage on other components varies, please see operator's manual for complete details.	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coverage on other components varies, please see operator's manual for complete details.
US MSRP ^	8 299,00 \$	8 849,00 \$

** All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.*

† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

^ Suggested prices will vary by market. Prices are shown in U.S. dollars. Set-up, delivery, documentation and destination fees not included. See dealer for details. Features vary by model.

We reserve the right to change specifications, features and pricing without notice.

Attachments

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



F210Z Zero Turn Mower

PREMIUM MOWING FEATURES AT A NOT-SO-PREMIUM PRICE

Engineered to tame even the most demanding environments, you'll find the Ferris® F210Z is up to the challenge. Equipped with premium components, like dual commercial Hydro-Gear® ZT-5400 Powertrain® Transaxles and cast-iron spindles with top access grease fittings, this is one workhorse you and your crew can depend on.

Starting at \$9,599.00[^]

FIND A DEALER (/na/en_us/support/dealer-locator.html)

Features



500 Hour Oil Change (Select Models)

Vanguard™ Engines with Oil Guard System reduce maintenance time and costs by up to 60%. **

OVERVIEW**FEATURES****SPECIFICATIONS****ATTACHMENTS****RELATED PRODUCTS****Affordable Power**

Now available with a Briggs & Stratton® Vanguard™ 810cc engine, which delivers uncompromised power at an affordable price.

**iCD™ Cutting System**

The iCD™ Cutting System was engineered to produce the best possible cut in a multitude of conditions.

**Cast-Iron Spindles**

Longer usable life, 1" shaft with top access grease fitting for greaseable dual ball bearings, six-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly.

Menu ▾


OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS

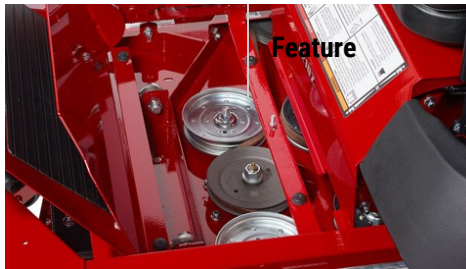

Accessibility

Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.



Commercial Transmission

Dual, commercial Hydro-Gear® ZT-5400 Powertrain® Transaxles deliver unmatched power and durability.



Foot-Operated Deck Lift

With an adjustable pedal, easily change change cut height in 1/4" increments from 1.5"- 6".



Premium Seat

Mid-back suspension seat with adjustable arm rests that helps take the bumps out of your work day.

Feature

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



Traction

Large 24" drive tires allow for greater traction, smoother ride and improved curb climbing performance.



Ride-On Mower Warranties[†]

4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Belts, tires, brake pads, battery, blades: 90 days.


****** Cost savings based on oil maintenance with 100 hour interval versus Oil Guard System 500 hour service interval.
† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.


Specifications

☐ 5901651 ☒ 5901653

Model Number	5901653
US MSRP [^]	10 099,00 \$
Engine Brand	Vanguard™ 810cc EFI with Oil Guard
Engine Power Rating [*]	28 gross hp
Displacement (cc)	810
PTO	Electric

<div> <div> <div>Cylinders</div> <div>Menu ▾</div> <div>Starter</div> </div> <div> <div>Fuel Tank Capacity (gal)</div> <div>Cutting Width (in)</div> <div>Cutting Height (in)</div> <div>Spindles</div> <div>Deck Construction</div> <div>Suspension</div> <div>Transmission</div> </div> <div> <div>RELATED PRODUCTS</div> <div>Drive Axles (in)</div> <div>Caster Tires (in)</div> <div>Drive Tires (in)</div> <div>Ground Speed-Fwd (mph)</div> <div>Ground Speed-Rev (mph)</div> <div>Overall Length (in)</div> <div>Overall Width (in) Deflector Down/Deflector Up</div> <div>Dry Weight (lbs)</div> <div>Seat Package</div> <div>Instrumentation/Hour Meter</div> <div>Certified Roll-over Protection System</div> <div>Controls / Safety Group</div> <div>Parking Brake / Safety Circuit</div> <div>Warranty (Engine) †</div> <div>Warranty (Balance of Machine) †</div> <div>Operator's Manuals</div> </div> </div>	<div> <div>2</div> <div>Feature</div> <div>Electric</div> </div>
	<div> <div>11</div> <div>61</div> <div>1.5 - 6</div> <div>Cast-Iron</div> <div>iCD™ Cutting System</div> <div>N/A</div> <div>Dual commercial Hydro-Gear® ZT-5400 Powertrain® Transaxles with 9" cooling fans</div> <div>1.375 Tapered</div> <div>13 x 6.5-6 Flat-free</div> <div>24 x 12-12</div> <div>0-10</div> <div>0-5</div> <div>79</div> <div>76 / 63</div> <div>1190</div> <div>Premium suspension mid-back seat with arm rests, adjustable fore and aft positioning</div> <div>Fuel level gauge in each tank, hour meter</div> <div>Standard, 165° foldable</div> <div>Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls</div> <div>Internal transaxle</div> <div>3-Year limited manufacturer's warranty</div> <div>4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coverage on other components varies, please see operator's manual for complete details.</div> <div> <div>📄 Illustrated Parts List - English (/na/en_us/product-catalog/zero-turn-mowers/f210z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5</div> <div>📄 Operator's Manual - English (/na/en_us/product-catalog/zero-turn-mowers/f210z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5</div> <div>📄 Operator's Manual - Spanish (/na/en_us/product-catalog/zero-turn-mowers/f210z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5</div> <div>📄 Operator's Manual - English (/na/en_us/product-catalog/zero-turn-mowers/f210z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5_LO.pdf.html)</div> </div> <div> <div>📄 Wiring Diagram Schematic - English (/na/en_us/product</div> </div> </div>

 Wiring Diagram Schematic - English (/na/en_us/product-catalog/zero-turn-mowers/f210z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5_L0.pdf.html)

 Wiring Diagram Schematic - English (/na/en_us/product-catalog/zero-turn-mowers/f210z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5_L0.pdf.html)

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

** Cost savings based on oil maintenance with 100 hour interval versus Oil Guard System 500 hour service interval.

† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

‡ Prices will vary by market. Prices are show in U.S. dollars. Set-up, delivery, documentation and destination fees not included. See dealer for details. Features vary by model. We reserve the right to change specifications, features and pricing without notice.

Attachments



Mulch Kit

Select kits include dedicated mulching blades, baffles, hardware and instruction sheet.



Trailer Hitch Kit

Will accept a 1/2" shank ball and comes complete with hardware.

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



ISX™ 2200 Zero Turn Mowers

THE LEADER IN SUSPENSION TECHNOLOGY FOR TURF

Featuring the next generation of Ferris suspension technology – ForeFront™ Suspension, a 2-belt iCD™ cutting system, heavy-duty Hydro-Gear® drive system and travel speeds up to 10 mph, the ISX™ 2200 is engineered to increase efficiency and operator comfort.

Starting at \$11,549.00[^]

FIND A DEALER (/na/en_us/support/dealer-locator.html)

Features

Menu ▾

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



Forefront™ Suspension System (<https://youtu.be/N9RqP1sAU7Q>)

The system utilizes four upper and lower control rods and mower-specific shocks that ensure the front caster bearing remains vertical through the full range of travel. This controlled motion results in a smoother ride, more precise tracing of the terrain and an improved cut.



Ride-On Mower Warranties

Coil-Over-Shocks and all suspension-related components are covered for 5 years (60 months), for unlimited hours. We are committed to providing performance, productivity and durability.



Menu ▾

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS

Redesigned Rear Bumper **Feature**

The redesigned rear bumper provides additional ground clearance for moving over curbs and loading trailers. Higher side walls protect the engine while maintaining easy service access.



500 Hour Oil Change

Vanguard™ Engines with Oil Guard System reduce maintenance time and costs by up to 60%.**



Drive System

Dual, commercial Hydro-Gear ZT-4400 transaxles deliver unmatched power and durability.

Menu ▾


OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS

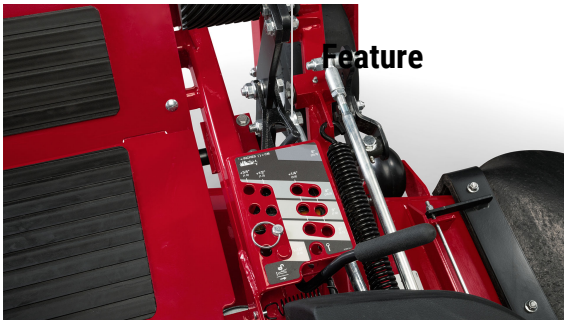

Adjustable Cut Height

Foot-operated deck lift, with adjustable pedal, can change cut height in 1/4" increments from 1.5" - 5".

Specifications

☒ 5901843 ☒ 5901845

Model Number	5901843	5901845
US MSRP ^	\$11,549.00	\$12,099.00
Engine Brand	Vanguard™ 810cc EFI with Oil Guard	Vanguard™ 810cc EFI with Oil Guard
Engine Power Rating *	28 gross hp	28 gross hp
Displacement (cc)	810	810
PTO	Electric	Electric
Cylinders	2	2
Fuel Tank Capacity (gal)	11	11

<div>Menu</div> <div>OVERVIEW</div> <div>FEATURES</div> <div>SPECIFICATIONS</div> <div>ATTACHMENTS</div> <div>RELATED PRODUCTS</div>	Cutting Width (in)	52	Feature	61
	Cutting Height (in)	1.5 - 5		1.5 - 5
	Spindles	Cast Iron Greasable		Cast Iron Greasable
	Suspension	ForeFront™ Suspension System - Front independent with four control rods paired with large size adjustable coil over shocks and a rear swing with large adjustable coilover shocks		ForeFront™ Suspension System - Front independent with four control rods paired with large size adjustable coil over shocks and a rear swing with large adjustable coilover shocks
	Drive Axles (in)	1.375		1.375
	Caster Tires (in)	13 x 6.5-6		13 x 6.5-6
	Drive Tires (in)	24 x 9.5 - 12		24 x 12-12
	Ground Speed-Fwd (mph)	0-10		0-10
	Ground Speed-Rev (mph)	0-5		0-5
	Overall Length (in)	83.63		83.63
	Overall Width (in) Deflector Down/Deflector Up	67 / 57		78 / 61.5
	Dry Weight (lbs)	1319		1398
	Seat Package	Premium high-back Suspension Seat with arm rests , adjustable lumbar and		Premium high-back Suspension Seat with arm rests , adjustable lumbar and

Menu ▼ OVERVIEW NEW! Defined Roll-over Protection System FEATURES SPECIFICATIONS Controls / Safety Group ATTACHMENTS RELATED PRODUCTS	back recline.	Feature	back recline.
	180° foldable		180° foldable
	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls		Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls
Parking Brake / Safety Circuit	Hand operated Internal transaxle brake		Hand operated Internal transaxle brake
Warranty (Engine) †	3-Year limited manufacturer's warranty		3-Year limited manufacturer's warranty
Warranty (Balance of Machine) †	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over-shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Coverage on other components varies, please see operator's manual for complete details.		4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over-shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Coverage on other components varies, please see operator's manual for complete details.
Deck Construction	iCD™ Cutting System, 2-Belt		iCD™ Cutting System, 2-Belt
Transmission Type	Dual, commercial Hydro-Gear® ZT-4400™ Transaxles with 8.3" cooling fans		Dual, commercial Hydro-Gear® ZT-4400™ Transaxles with 8.3" cooling fans

Menu	Electric		Feature		Electric	
	OVERVIEW		Lubrication System		Standard	
FEATURES						
SPECIFICATIONS						
ATTACHMENTS						
RELATED PRODUCTS						

Attachments



Fast-Vac® Triple Bag Collection System

The triple bag collection system is simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Available on 61" and 52" models.





F320Z Zero Turn Mower

BIG ON MOWER PERFORMANCE, BIG ON VALUE

If you demand power, performance and dependability all at a great value, look no further than the Ferris® F320Z. This top-of-the-line Fleet Series model comes equipped with a premium high-back adjustable suspension seat and heavy-duty components, such as Hercules™ II cast-iron spindles. Large 26" drive tires allow for greater traction, smoother ride and improved curb climbing performance.

Starting at \$12,199.00[^]

FIND A DEALER (/na/en_us/support/dealer-locator.html)

Features

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



500 Hour Oil Change (Select Models)

Vanguard™ Engines with Oil Guard System reduce maintenance time and costs by up to 60%.**



Powerful Engine

For the most challenging applications, this **BIG BLOCK™ EFI Engine** has been expertly engineered to deliver the dependability to get more done in less time.



iCD™ Cutting System

The iCD™ Cutting System was engineered to produce the best possible cut in a multitude of conditions.

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



Hercules™ II Spindles

Hercules™ II Spindles industrial 10" dia. cast-iron spindle assembly with 1 3/16" dia. shaft and greaseable double row angular contact ball bearings, which can be greased through the convenient top access grease fitting.



Accessibility

Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.



OVERVIEW

Dual, commercial Hydro-Gear® ZT-5400 Powertrain® Transaxles deliver unmatched power and durability.

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



Foot-Operated Deck Lift

Foot-operated deck lift, with adjustable pedal, can change cut height in 1/4" increments from 1.5" - 5".



Premium High-Back Suspension Seat

Suspension seat with reclining back and lumbar support for optimal comfort.



Feature

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS

Traction

Large 26" drive tires allow for greater traction, smoother ride and improved curb climbing performance and faster cutting speeds.



Ride-On Mower Warranties†

4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Belts, tires, brake pads, battery, blades: 90 days.

** Cost savings based on oil maintenance with 100 hour interval versus Oil Guard System 500 hour service interval.
† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

Specifications

- ☒ 5901644
- ☒ 5901646

Model Number	5901644	5901646
US MSRP ^	12 199,00 \$	12 849,00 \$
Engine Brand	Vanguard™ BIG BLOCK™ EFI with Oil Guard	Vanguard™ BIG BLOCK™ EFI with Oil Guard
Engine Power Rating *	37 gross hp	37 gross hp
Menu ▾	Feature	

Displacement (cc)
OVERVIEW

993

993

FEATURES

Electric

Electric

SPECIFICATIONS
Cylinders

2

2

ATTACHMENTS

Starter
RELATED PRODUCTS

Electric

Electric

Fuel Tank Capacity (gal)

11

11

Cutting Width (in)

61

72

Cutting Height (in)

1.5 - 5

1.5 - 5

Spindles

Hercules™ II Spindles

Hercules™ II Spindles

Deck Construction

iCD™ Cutting System

iCD™ Cutting System

Suspension

N/A

N/A

Transmission

Dual commercial Hydro-Gear®
ZT-5400 Powertrain®
Transaxles with 9" cooling
fans

Dual commercial Hydro-Gear®
ZT-5400 Powertrain®
Transaxles with 9" cooling
fans

Drive Axles (in)

1.375 Tapered

1.375 Tapered

Caster Tires (in)

13 x 6.5-6 Flat-free

13 x 6.5-6 Flat-free

Drive Tires (in)

26 x 12-12

26 x 12-12

Menu
and Speed-Fwd (mph)

0-12

Feature

0-12

OVERVIEW

Ground Speed-Rev (mph)	0-6	0-6
FEATURES		
Overall Length (in)	81	81
SPECIFICATIONS		
Overall Width (in) Deflector Down/Deflector Up	76 / 63	88 / 74
RELATED PRODUCTS		
Dry Weight (lbs)	1405	1439
Seat Package	Premium suspension high-back seat with adjustable arm rests, adjustable lumbar and back recline	Premium suspension high-back seat with adjustable arm rests, adjustable lumbar and back recline
Instrumentation/Hour Meter	Fuel level gauge in each tank, hour meter	Fuel level gauge in each tank, hour meter
Certified Roll-over Protection System	Standard, 165° foldable	Standard, 165° foldable
Controls / Safety Group	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls
Parking Brake / Safety Circuit	Internal transaxles	Internal transaxles
Warranty (Engine) †	3-Year limited manufacturer's warranty	3-Year limited manufacturer's warranty
Warranty (Balance of Machine) †	4-Year limited warranty (48 months) or 500 hours, whichever occurs first.	4-Year limited warranty (48 months) or 500 hours, whichever occurs first.



ISX™ 3300 Zero Turn Mowers

THE LEADER IN SUSPENSION TECHNOLOGY FOR TURF

Featuring the next generation of Ferris suspension technology – ForeFront™ Suspension, a 2-belt iCD™ cutting system, heavy-duty Hydro-Gear® drive system and travel speeds up to 12 mph, the ISX™ 3300 is engineered to increase efficiency and operator comfort.

Starting at \$14,699.00[^]

FIND A DEALER (/na/en_us/support/dealer-locator.html)

Features

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



Forefront™ Suspension System (<https://youtu.be/N9RqP1sAU7Q>)

The system utilizes four upper and lower control rods and mower-specific shocks that ensure the front caster bearing remains vertical through the full range of travel. This controlled motion results in a smoother ride, more precise tracing of the terrain and an improved cut.



Ride-On Mower Warranties

Coil-Over-Shocks and all suspension-related components are covered for 5 years (60 months), for unlimited hours. We are committed to providing performance, productivity and durability.

Menu ▾



Feature

OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS

Redesigned Rear Bumper

The redesigned rear bumper provides additional ground clearance for moving over curbs and loading trailers. Higher side walls protect the engine while maintaining easy service access.



500 Hour Oil Change

Vanguard™ Engines with Oil Guard System reduce maintenance time and costs by up to 60%.**



Drive System

Dual, commercial Hydro-Gear ZT-4400 transaxles deliver unmatched power and durability.

OVERVIEW

FEATURES

SPECIFICATIONS


ATTACHMENTS

RELATED PRODUCTS



Premium High-Back Suspension Seat

Mow in superior comfort with arm rests, multi-position head rest, adjustable lumbar and seat recline

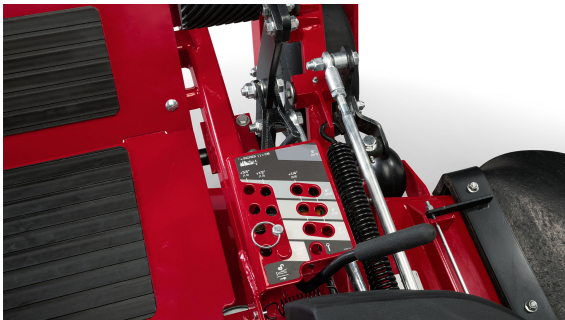

Adjustable Cut Height

Foot-operated deck lift, with adjustable pedal, can change cut height in 1/4" increments from 1.5"- 5".



Hercules™ II Spindles

Hercules™ II spindles; 10" dia. cast-iron with industrial double row angular contact ball bearing with 1 3/16" dia. shaft. Contact ball bearings with 1 3/16" dia. shaft.

OVERVIEW

FEATURES

SPECIFICATIONS

Specifications

 5901855  5901856

RELATED PRODUCTS		
Model Number	5901855	5901856
US MSRP ^	14 699,00 \$	15 249,00 \$
Engine Brand	Vanguard™ BIG BLOCK™ EFI with Oil Guard	Vanguard™ BIG BLOCK™ EFI with Oil Guard
Engine Power Rating *	37 gross hp	37 gross hp
Displacement (cc)	993	993
PTO	Electric	Electric
Cylinders	2	2
Fuel Tank Capacity (gal)	11	11
Cutting Width (in)	61	72
Cutting Height (in)	1.5 - 5	1.5 - 5
Spindles	Hercules™ II Cast-Iron	Hercules™ II Cast-Iron
Suspension	ForeFront™ Suspension System - Front independent with four control rods paired	ForeFront™ Suspension System - Front independent with four control rods paired

Menu ▾

Feature

OVERVIEW	with large size adjustable coil over shocks and a rear swing	with large size adjustable coil over shocks and a rear swing
FEATURES	with large adjustable coilover shocks	with large adjustable coilover shocks
SPECIFICATIONS		
Drive Axles (in) ATTACHMENTS	1.375	1.375
RELATED PRODUCTS		
Caster Tires (in)	13 x 6.5-6	13 x 6.5-6
Drive Tires (in)	26 x 12-12	26 x 12-12
Ground Speed-Fwd (mph)	0-12	0-12
Ground Speed-Rev (mph)	0-5	0-5
Overall Length (in)	84.5	84.5
Overall Width (in) Deflector Down/Deflector Up	77/66.5	86 / 74
Seat Package	Premium high-back Suspension Seat with arm rests, multiposition headrest, adjustable lumbar and back recline	Premium high-back Suspension Seat with arm rests, multiposition headrest, adjustable lumbar and back recline
Certified Roll-over Protection System	165° foldable	165° foldable
Controls / Safety Group	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls

OVERVIEW		
Parking Brake / Safety Circuit	Hand operated Internal transaxle brake	Hand operated Internal transaxle brake
FEATURES		
SPECIFICATIONS		
Warranty (Engine) †	3-Year limited manufacturer's warranty	3-Year limited manufacturer's warranty
ATTACHMENTS		
Warranty (Balance of Machine) †	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over-shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Belts, tires, brake pads, battery, blades: 90 days.	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over-shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Belts, tires, brake pads, battery, blades: 90 days.
Deck Construction	iCD™ Cutting System, 2-Belt	iCD™ Cutting System, 2-Belt
Transmission Type	Dual commercial Hydro-Gear® ZT-5400 Powertrain® transaxles with 9" cooling fans	Dual commercial Hydro-Gear® ZT-5400 Powertrain® transaxles with 9" cooling fans
Starter	Electric	Electric
Lubrication System	Standard	Standard
Gross Weight	1608	1717

** All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.*

† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

*** Cost savings based on oil maintenance with 100 hour interval versus Oil Guard System 500 hour service interval.*



IS[®] 2600Z Zero Turn Mower

AFFORDABLE AND DEPENDABLE DIESEL POWER FOR LAWN CARE PROS

The IS[®] 2600Z mower builds on the Ferris zero-turn legacy, offering diesel power with premium features and enhanced productivity. Featuring our iCD™ Cutting System and long-life greaseable cast-iron spindles, this machine truly performs under the rigors of professional landscaping.

Starting at \$17,149.00[^]

FIND A DEALER (/na/en_us/support/dealer-locator.html)

61"

Top Cutting Width

24 HP

Top Power Rating*

10 MPH

Top Ground Speed

4-Years

Limited Warranty†

Features


OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS

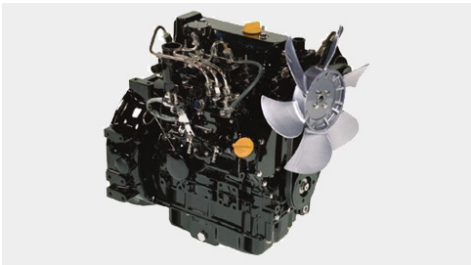

Efficient Engine
Efficient Yanmar™ 3-cylinder diesel engine.



Accessibility
Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.



Patented Suspension System
Consists of adjustable rear coil-over-shocks (shown) and front independent adjustable coil-over-shocks.



Menu ▾

Serviceability | Feature

OVERVIEW

Quick-release latches allow for easy access to engine compartment.

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS



Cast-Iron Spindles

Longer usable life, 1" shaft with top access grease fitting for greaseable dual ball bearings, six-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly.



Foot-Operated Deck Lift

With adjustable pedal, can change cut height in 1/4" increments from 1.75" - 5".



Heavy-Duty Bumper

Heavy-duty integrated rear bumper protects engine compartment.


OVERVIEW

FEATURES

SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS

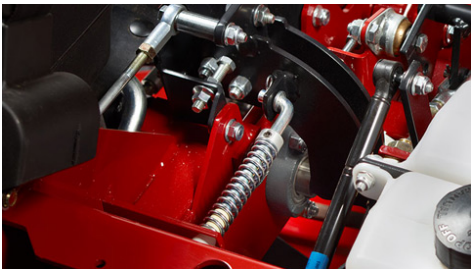

Smooth Steering

Patented steering system delivers exceptionally smooth performance.




Ride-On Mower Warranties†

Coil-Over-Shocks and all suspension-related components are covered for 5 years (60 months), for unlimited hours. We are committed to providing performance, productivity and durability.

† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

Specifications

<div><div></div><div>5901475</div></div>	
Model Number	5901475
US MSRP ^	17 149,00 \$
Engine Brand	Yanmar™ diesel
Engine Power Rating *	24 gross hp
Displacement (cc)	904
PTO	Electric
Cylinders	3
Starter	Electric
Fuel Tank Capacity (gal)	11
Cutting Width (in)	61
Cutting Height (in)	1.75 - 5
Menu ▾ Spindles	Feature Cast-iron

Deck Construction

Suspension

FEATURES

Transmission SPECIFICATIONS

Drive Axles (in) ATTACHMENTS

Caster Tires (in)

Drive Tires (in) RELATED PRODUCTS

Ground Speed-Fwd (mph)

Ground Speed-Rev (mph)

Overall Length (in)

Overall Width (in) Deflector Down/Deflector Up

Dry Weight (lbs)

Seat Package

Instrumentation/Hour Meter

Certified Roll-over Protection System

Controls / Safety Group

Parking Brake / Safety Circuit

Warranty (Engine) †

Warranty (Balance of Machine) †

Brake

Operator's Manuals

iCD™ Cutting System

Adjustable rear coil-over-shocks and front independent adjustable coil-over-shocks

Dual commercial Hydro-Gear® ZT-4400™ Transaxles with 8.3" cooling fans

1.375

13 x 6.5-6

24 x 12-12

0-10

0-6

88

76.75 / 63.5

1606

Premium mid-back with arm rests

Fuel level gauge in each tank, visual water temperature gauge, hour meter

Standard, 180° foldable


Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls


Internal transaxles


2-Year limited manufacturer's warranty


4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over-shocks and all suspension related components are covered for 4 years (48 months) unlimited hours. Coverage on other components varies, please see operator's manual for complete details.


Internal transaxles

 Illustrated Parts List - English (/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5

 Operator's Manual - English (/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5

 Operator's Manual - Spanish, Latin America (/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5

 Operator's Manual - English (/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5

 Operator's Manual - English (/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-

Feature
mower/_jcr_content/tab/item_2/specifications.downloadmanual.5

 Operator's Manual - Spanish (/na/en_us/product-

Menu ▾


OVERVIEW


FEATURES


SPECIFICATIONS

ATTACHMENTS

RELATED PRODUCTS

 [Operator's Manual - Spanish \(/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5](/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5)

 [Wiring Diagram Schematic - English \(/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5_L0.pdf.html\)](/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5_L0.pdf.html)

 [Wiring Diagram Schematic - English \(/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5_L0.pdf.html\)](/na/en_us/product-catalog/zero-turn-mowers/is-2600z-zero-turn-mower/_jcr_content/tab/item_2/specifications.downloadmanual.5_L0.pdf.html)

* Power rated by engine manufacturer.

† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

^ Suggested prices will vary by market. Prices are shown in U.S. dollars. Set-up, delivery, documentation and destination fees not included. See dealer for details. Features vary by model. We reserve the right to change specifications, features and pricing without notice.

Attachments



Mulch Kit

Select kits include dedicated mulching blades, baffles, hardware and instruction sheet.



Trailer Hitch Kit

Will accept a 1/2" shank ball and comes complete with hardware.