




## Texas Trailers Model TX8528T

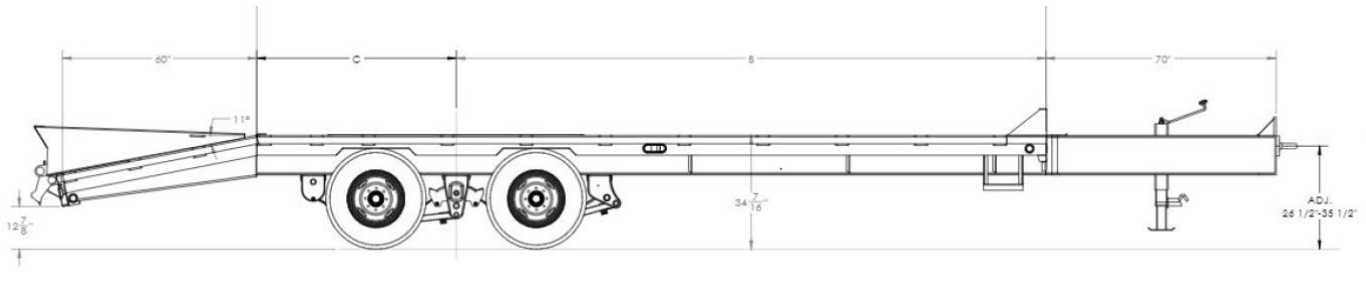

<b>Axle</b>	(2) 8,000# Oil Bath w/ Electric Brakes
<b>Jack</b>	Dual 12,000# Drop Leg Side Wind (Bolted On)
<b>Toolbox</b>	Lockable in A-Frame
<b>Tire</b>	ST215/75 R-17.5 Load Range H
<b>Floor</b>	2" Treated Pine
<b>Frame</b>	12" I-Beam 14# (16# on 28 Trailer and Longer)
<b>Wheel</b>	17.5 x 6.75", Black Mod 8 Bolt
<b>Finish</b>	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
<b>Lights</b>	L.E.D. D.O.T. Stop, Tail, Turn and Clearance
<b>Coupler</b>	3" Pintle Ring
<b>Spare</b>	ST215/75R-17.5 Load Range H
<b>Carrying Capacity</b>	12,500#

<b>Dovetail</b>	5 Cleated Dovetail w/ 5 Double Hinged, Spring-Assisted Flip-Over Ramps
<b>G.V.W.R.</b>	17,500#
<b>ELEC. Plug</b>	7-Way RV
<b>Hitch Type</b>	Pintle Eye
<b>Side Rails</b>	5" Channel w/ Rub Rail, Stake Pockets, and Chain Spools
<b>Suspension</b>	Multi-Leaf Slipper Spring w/Equalizer
<b>Crossmembers</b>	3" Channel
<b>Finish (Prep)</b>	Steel is Cleaned to Ensure a Professional Smooth Finish.
<b>Safety Chains</b>	3/8" Grd. 70 w/Safety Latch Hook (2 each)
<b>G.A.W.R. (ea. Axle)</b>	8,000#
<b>Ramps</b>	Spring Assisted Fold Over
<b>Length</b>	25' Deck Plus 5' Dove Tail