



State Certified
CMC #052392
PCC #048371

5440 NW 78th Avenue / Miami, Florida 33166 / Phone 305-592-8730 / Fax 305-592-6571 / 800-274-8730

JOBBERS EQUIPMENT WAREHOUSE, INC.

Florida Sheriffs Association

Cooperative Purchasing Program

BID-Contract FSA20-EQU18.0 HEAVY EQUIPMENT

Description:

Item #: 473

Group: VEHICLE LIFT - Stationary - 2 Post Symmetric Stationary Vehicle Lift 12k

Make: Challenger Lifts

Model: CL 12-LC

Model #: CL 12-LC

Description:

Lifting Capacity 12,000 lbs.

Lifting Configuration Symmetric Arms 3-stage front/3-stage rear

Rise Height (includes 6" tall adapter) 80.25"

Overall Height 11'-11" (143")

Overall Width 142"

Drive-Thru Clearance 103.5"

Floor to Overhead Switch 136"

Arm Reach (Min.) 27.5"

Arm Reach (Max.) 59"

Screw Pad Height * 5" / 12.625" (includes 6" tall adapter)

Inside Columns 114.5"

Motor / Voltage 2HP, 208v-230v, 60Hz, 1Ph

Speed of Rise (approximate) 60 s

Ceiling Height Required 12'

ALI/ETL Certified: Yes

Colors Available Red, Blue, Black




CL12

SITE SPECIFICATIONS

- **BAY HEIGHT:** 14' minimum (for standard model)
- **BAY WIDTH:** 14' recommended
- **BAY DEPTH:** 24' recommended
- **POWER REQ.:** 208-230v Single Phase*, 30-amp breaker
- **MIN. CONCRETE SPEC:** 4" thick, reinforced, free from cracks/seams, rated at 3500+ psi, cured at least 28 days




Model Number	CL12-LC	CL12-LC-QC-DPC	CL12	CL12-1	CL12-2	CL12-QC-DPC
Lifting Capacity	12,000 lbs.					
Lifting Configuration	Symmetric					
Arms	3-stage front/3-stage rear					
Rise Height ¹	80.25"	84.75"				
Overall Height	11'11"	13'8" / 13'2" ² / 14'8" / 14'2" ² / 15'8" / 15'2" ² / 13'8" / 13'2" ²				
Overall Width	142"					
Drive-Thru Clearance	103.5"					
Floor to Overhead Switch	136"	157" / 169" / 181" / 157"				
Arm Reach (Min.)	27.5"					
Arm Reach (Max.)	59"					
Screw Pad Height ²	5" / 12.625" (includes 6" stack adapter)					
Inside Columns	114.5"					
Motor / Voltage ³	2HP, 208v-230v, 60Hz, 1Ph	3HP, 208v-230v, 60Hz, 1Ph	2HP, 208v-230v, 60Hz, 1Ph			3HP, 208v-230v, 60Hz, 1Ph
Speed of Rise	60 s	38 s	63 s			40 s
Ceiling Height Required	12'	13'9" / 14'9" / 15'9" / 13'9"				
ALI/ETL Certified	√					
Colors Available						

*3-phase upgrade is available for purchase

¹Rise height is measured with superstructure in highest position.

²Height can be adjusted as much as 6" down to allow for ceiling obstruction

SERVICE BAY LAYOUT

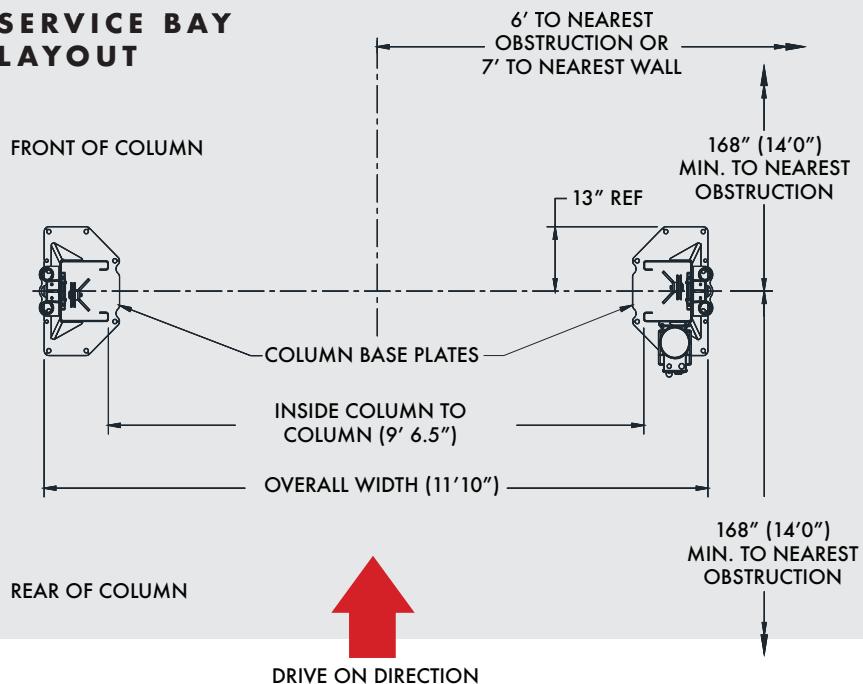

www.challengerlifts.com
1-800-648-5438