



State Certified
CMC #052392
PCC #048371

5440 NW 78th Avenue / Miami, Florida 33166 / Phone 305-592-8730 / Fax 305-592-6571 / 800-274-8730

JOBBERS EQUIPMENT WAREHOUSE, INC.

**Florida Sheriffs Association
Cooperative Purchasing Program
BID-Contract FSA20-EQU18.0 HEAVY EQUIPMENT**

Item #: 517

Group: VEHICLE LIFT: Mobile - 6 Column, Wireless

Make: Challenger Lifts

Model: CLHM-190 - 6

Model #: CLHM-190-6

Description:

Lifting Capacity Per Column 19,000 lbs. per column
Height of Lift Unit 88.5"
Height of Lift Unit at Full Rise 157.125"
Width of Lift Unit 44.25"
Length of Lift Unit 53.625"
Minimum Lift Height (4 or more units) 69"
Maximum Lift Height (2 units - Normal Mode) 32"
Min-Max Wheel Diameter 5" - 24.5"
Hydraulic System Operating Pressure 2,600 psi
Lift Speed (Max Load) 60" per min.
Weight of Lift Unit 1,510 lbs
Footprint of Lift Unit 560 sq. in
Ground Pressure for each Lift (Max. Load) 36.6 psi
Turning Radius of Lift Unit 47"
Operating Peak Power 4HP
Operating Voltage 24 VDC nominal
Charger Voltage Required 120 VAC @ 60 Hz
Charger Amps Required 1.3 Amps
ALI/ETL Certified: Yes
Colors Available Blue

SAFETY FEATURES

- Linear position transducers maintains system synchronization and ensures maximum reliability
- Integrated weight gauges help prevent column overloading and verifies lock engagement
- Wireless system for clutter free work area without cables to connect, navigate around, roll-over or replace



SPECIFICATIONS



Model Number	CLHM-140	CLHM-190	CLHM-190W
Lifting Capacity Per Column ¹	14,000 lbs	19,000 lbs	19,000 lbs
A Height of Lift Unit	88.5" (2,248 mm)		
B Height of Lift Unit at Full Rise	157.125" (3,991 mm)		
C Width of Lift Unit	44.25" (1,124 mm)		49" (1,245 mm)
D Length of Lift Unit	53.625" (1,362 mm)		
E Max. Lift Height (4 or more units)	69" (1,753 mm)		
Max. Lift Height (2 units - Normal Mode)	32" (813 mm)		
F Min-Max Wheel Diameter	5" - 24.5" (127 - 622 mm)	5" - 24.5" (127 - 622 mm)	4" - Max det. by tire diameter
Max. Hydraulic System Operating Pressure	2,180 psi	2,600 psi	
Lift Speed (Max Load)	60" (1524mm) per min.		
Weight of Lift Unit	1,485 lbs (674 kg)	1,510 lbs (685 kg)	1,575 lbs (714 kg)
Footprint of Lift Unit	560 sq in. (3,613 sq cm)		600 sq in. (3,870 sq cm)
Ground Pressure for each Lift (Max. Load)	27.7 psi (191 kPa)	36.6 psi (252 kPa)	34.3 psi (236 kPa)
Turning Radius of Lift Unit	47" (1194 mm)		
Operating Peak Power	4HP		
Operating Voltage	24 VDC Nominal		
Charger Voltage Required	120 VAC @ 60 Hz		
Charger Amps Required	1.3 amps		

* CLHM series Wireless/Battery Operated Mobile Columns available in 2, 4, 6 and 8 column configurations with 14,000 lb. and 19,000 lb. per column capacity.

¹ Multiply number of columns by "Lifting Capacity Per Column" to calculate overall lifting capacity of configuration

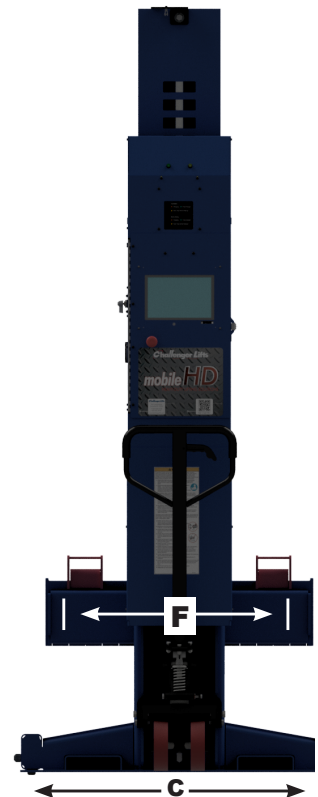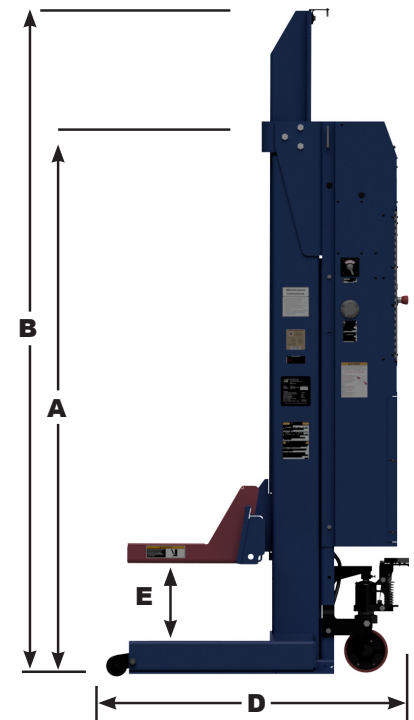

For more information, contact your Authorized Challenger Lifts Distributor:

800-648-5438 | 502-625-0700 | Fax: 502-625-0711 | Email: sales@challengerlifts.com
2311 South Park Road | Louisville, KY 40219

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.



AAIA
Automotive Aftermarket
Industry Association



© All Rights Reserved
CLHM.02.18.001