

5440 NW 78th Avenue / Miami, Fiorida 33166 / Phone 305-592-8730 / Fax 305-592-8571 / 800-274-8730

JOBBERS EQUIPMENT WAREHOUSE, INC.

Florida Sheriffs Association Cooperative Purchasing Program BID-Contract FSA20-EQU18.0 HEAVY EQUIPMENT

Item #: 524

Group: VEHICLE LIFT: Stationary - 2 Post Symmetric Stationary Vehicle Lift 15k


Make: Challenger Lifts

Model: 15000-3S Model #: 15000-3S

Description:

Lifting Capacity 15,000 lbs. Lifting Configuration Symmetric Arms HD 3-stage front/HD 3-stage rear Rise Height 82" Overall Height 174" 2' Height Extension Available Y Overall Width 154.75" Drive-Thru Clearance 104.25" Floor to Overhead Switch 167" Arm Reach (Min.) 36.625" Arm Reach (Max.) 75" Screw Pad Height 5.5" - 10.875" Inside Columns 119.875" Air Supply Required 90-120 psi Motor / Voltage 2HP, 208v-230v, 60Hz, 1Ph Speed of Rise 77 s Ceiling Height Required 14' 8" ALI/ETL Certified: Yes Colors Available Red, Blue, Black



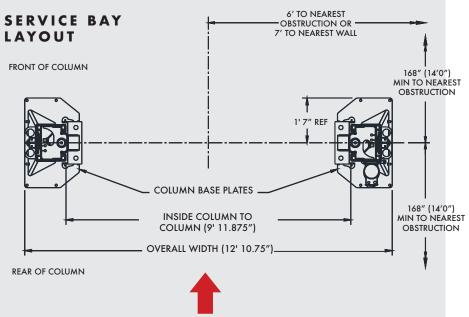

DIRECTION

CL Challenger Lifts

15000

SITE SPECIFICATIONS

• BAY HEIGHT: 14'8" minimum

• BAY WIDTH: 14' recommended

• BAY DEPTH: 28' recommended

POWER REQ.: 208-230v
 Single Phase*, 30-amp breaker

- MIN. CONCRETE SPEC: 4" thick, reinforced, free from cracks/seams, rated at 3500+ psi, cured at least 28 days
- AIR REQUIRED: 90-120 psi

\bigvee		
Model Number	15000-3S	15000
Lifting Capacity	15,000 lbs.	
Lifting Configuration	Symmetric	
Arms	HD 2-stage front/HD 2-stage rear	
Rise Height	82″	85"
Overall Height	174″	
Overall Width	154.75"	
Drive-Thru Clearance	104.25″	
Floor to Overhead Switch	167"	
Arm Reach (Min.)	36.625"	38.5"
Arm Reach (Max.)	75″	62 "
Screw Pad Height	5.5" - 10.875"	 6.625" - 8.5"
Inside Columns	119.8 <i>75"</i>	
Air Supply Required	90-120 psi	
Motor / Voltage	2HP, 208v-230v, 60Hz, 1Ph	
Speed of Rise	77 s	
Ceiling Height Required	14′ 8″	
ALI/ETL Certified	√	√
2' Height Extension Available	V	√
Colors Available		

^{*3-}phase upgrade is available for purchase

www.challengerlifts.com 1-800-648-5438