
PREPARED BY

GapVax, Inc.

PREPARED FOR

QUOTE

GapVax.



QUOTE ID

20xxx

PRICING FROM

2/24/2020



2021 MC1510-3S3X COMBINATION JET/VAC

QUOTE ID: 20xxx

August 28, 2020

NOTE: THE GAPVAX MC UNIT MAY EXCEED FEDERAL BRIDGE ALLOWABLE WEIGHTS WHEN LOADED WITH WATER, OR DEBRIS, AND/OR BOTH WATER AND DEBRIS COMBINED. PLEASE CONSULT FACTORY.

OPTION DESCRIPTION		NOTES	QTY
CHASSIS OPTIONS			
CHA001	CUSTOMER SUPPLIED CHASSIS	MODEL YEAR 2020	1
DEBRIS BODY OPTIONS			
STD	10 USABLE YARD DEBRIS TANK MADE OF 3/16" ASTM A-572 GRADE 50 EXTEN STEEL		STANDARD
STD	FULL-OPENING REAR TAILGATE		STANDARD
STD	STAINLESS STEEL TAILGATE SEALING ROD		STANDARD
STD	FOUR HYDRAULIC REAR DOOR LOCKS		STANDARD
STD	DUAL TAILGATE LIFT CYLINDERS		STANDARD
STD	FRONT MOUNTED HOIST CYLINDER, POWER UP AND DOWN, 55,000 LB CAPACITY		STANDARD
STD	THREE TIE-OFF ANCHORS ON TOP OF BODY		STANDARD
STD	FIVE YEAR WARRANTY ON DEBRIS TANK AGAINST RUST THROUGH, DISTORTION AND CRACKS		STANDARD
STD	THREE TIE-OFF ANCHORS ON TOP OF THE BODY 6' APART		STANDARD
A2A	DRAIN AT BOTTOM OF TAILGATE - 6" BRASS LEVER VALVE WITH 15' OF LAYFLAT HOSE	VALVE IS NOT 100% LEAK PROOF	1
A3-CS	FLOAT TYPE LIQUID LEVEL INDICATOR ON SIDE OF DEBRIS TANK		1
A21X	MOUNTING TABS FOR CURBSIDE LADDER		STANDARD
WATER TANK OPTIONS			
STD	1500 GALLON WATER TANK MADE OF 3/16" 304 STAINLESS STEEL		STANDARD
STD	4" HIGH ANTI-SIPHON RING WITH (4) 2-1/2" HOLES		STANDARD
STD	WATER TANK LEVEL SIGHT TUBE ON CURBSIDE		STANDARD
STD	DRAIN VALVE AT BOTTOM OF WATER TANK		STANDARD
STD	3" FILL LINE WITH 2-1/2" FIRE HOSE CONNECTION CURBSIDE		STANDARD
STD	3" WATER STRAINER WITH STAINLESS STEEL SCREEN ON WATER TANK FILL LINE		STANDARD
STD	3" SUPPLY LINE TO WATER PUMP MOUNTED AT REAR HINGE PIN		STANDARD
STD	FIVE YEAR WARRANTY ON WATER TANK AGAINST RUST THROUGH, DISTORTION AND CRACKS		STANDARD
B30	UPGRADE TO BUTTERFLY VALVE IN 3" SUPPLY LINE		STANDARD
VACUUM SYSTEM OPTIONS			
STD	ROOTS TYPE VACUUM PUMP 3,500 CFM AND 16" HG		STANDARD
STD	DUAL STAINLESS STEEL SHUTOFF FLOAT BALLS		STANDARD
STD	NOISE & VIBRATION DAMPENING MOUNTS		STANDARD
STD	STAINLESS STEEL VEE-WIRE SAFETY SCREEN		STANDARD
STD	6" SAFETY VACUUM RELIEF		STANDARD

STD	PANIC SWITCH FUNCTION FOR VACUUM	STANDARD
WATER SYSTEM OPTIONS		
STD	TRI-PLEX WATER PUMP SYSTEM	STANDARD
STD	800 PSI WASHDOWN CIRCUIT WITH 50' X 1/2" HOSE	STANDARD
STD	AIR PURGE SYSTEM FOR PRIMARY CIRCUIT	STANDARD
STD	LOW POINT DRAIN VALVES ON WATER LINES	STANDARD
STD	SET WASHDOWN CIRCUIT TO 800 PSI	1
D3A	GIANT GP8000 SERIES WATER PUMP RATED 80 GPM @ 2,500 PSI	1
D7A	50' X 1/2" HAND GUN REEL FOR WASHDOWN CIRCUIT	1
BOOM OPTIONS		
STD	8" FRONT MOUNTED TELESCOPING BOOM WITH 26' REACH AND 180 DEG. ROTATION	STANDARD
STD	180 DEGREE POWER ROTATION VIA WORM DRIVE	STANDARD
STD	DUAL 4" LIFT CYLINDERS	STANDARD
STD	CAB PROTECTION RACK	STANDARD
HOSE REEL OPTIONS		
STD	FRONT FRAME MOUNTED HOSE REEL WITH 180 DEGREE ARTICULATION	STANDARD
STD	HOSE REEL RATED FOR 800' OF HOSE AND 3,000 PSI	STANDARD
STD	EXTERIOR HOSE EXPANSION RIBS	STANDARD
CONTROLS, GUAGES, ACCESSORIES OPTIONS		
STD	CAB-MOUNTED AIR SHIFT CONTROLS FOR BLOWER, HYDRAULICS, AND WATER PUMP	STANDARD
STD	CONTROL PANEL MOUNTED AT FRONT HOSE REEL	STANDARD
STD	OPERATOR CONTROL PANEL INCLUDES GUAGES FOR ENGINE, HYDRAULICS, VACUUM, AND WATER PUMP	STANDARD
STD	PANIC SWITCH TO RELIEVE WATER PRESSURE AND VACUUM	STANDARD
STD	30' PENDANT REMOTE WITH BOOM FUNCTIONS	STANDARD
LIGHTING		
STD	TRUCK-LITE LED RUNNING (MARKER) LIGHTS	STANDARD
STD	LED STOP/TAIL/TURN LIGHT WITH POLISHED STAINLESS STEEL BOXES	STANDARD
STORAGE OPTIONS		
STD	25' FIRE HOSE BASKET	STANDARD
STD	TWO (2) GALVANIZED STEEL TUBE TRAYS	STANDARD
CHASSIS OPTIONS		
STD	DOT LIGHTING / FENDERS / MUD FLAPS / TAILGATE SAFETY PROP, ICC LIGHTS	STANDARD
STD	REMOTE ACTUATED BODY SAFETY PROP	STANDARD
STD	70 GALLONS AW-46 HYDRAULIC OIL, LEVEL/TEMPERATURE GAUGE, SHUTOFF ON SUCTION	STANDARD
STD	REAR BUMPER, TRIANGLE KIT, FIRE EXTINGUISHER, BACKUP ALARM	STANDARD
STD	ALLISON 10-BOLT PTO UPGRADE	STANDARD
J0	FRONT BUMPER - MAY NOT BE REQUIRED IN ALL STATES	1
PAINT OPTIONS		
STD	PAINTED WITH PPG URETHANE PAINT	STANDARD
STD	PAINT BODY WHITE	STANDARD

STD	PAINT FRAME AND PARTS BLACK	STANDARD
STD	PAINT HOSE REEL AND BOOM BLACK	STANDARD
STD	FLEET FINISH	STANDARD
MISCELLANEOUS OPTIONS		
STD	25 FEET OF VACUUM TUBING (5) AND CLAMPS	STANDARD
STD	TIGER TAIL HOSE GUIDE	STANDARD
STD	TWO BLUE STAR SEWER CLEANING NOZZLES	STANDARD
M7J	1" PIRHANA SEWER HOSE - 2,500 PSI X 500 FT PLASTIC (ORANGE) (PN: HOS022500)	1



PRICING SUMMARY

PRICE OF BASE UNIT WITH OPTIONS:

FSA DISCOUNT:

ESTIMATED SUBTOTAL:

SALES TAX:

TOTAL PRICE (PER UNIT):

ALL PRICES ARE IN US DOLLARS

DUE TO EXTREME MARKET VOLATILITY AND PENDING U.S. GOVERNMENT SECTION 232 TRADE CASES ALL PRICES AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE, ALL QUOTES TO BE CONFIRMED AT TIME OF ORDER

*** FOB DESTINATION ***



MC SERIES

COMBINATION JETVAC




MC SERIES COMBINATION JETVAC



180° Front Hose
Reel Rotation

180° Boom Rotation

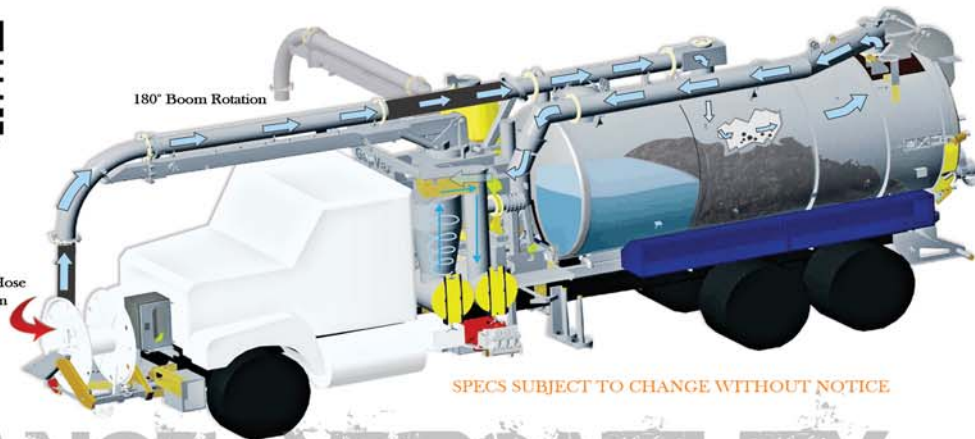

SPECS SUBJECT TO CHANGE WITHOUT NOTICE

POWER. PERFORMANCE. VERSATILITY.

VACUUM SYSTEM:

Positive Displacement Pump; 3,500 CFM, 16" Hg 500 HP Transfer Case -15,500 ft-lb torque, with air shift. The 8' front-mounted, telescopic boom has twin lift cylinders, and a 26' reach. (Options include blowers up to 6,000 CFM/27" Hg).

FILTRATION:

Top loading debris tank, debris body baffle, dual 10" stainless steel floatball shutoff, and centrifugal cyclone separator. They cyclone has a full opening door with removable vortex finder and 20" cleanout. Also equipped with a custom engineered, washable, stainless steel vee wire filter (300 micron).

DEBRIS BODY:

Our unique design offers a unitized water and debris tank with double sub-frame. Payload options of 5-13 cubic yards, made from 3/16" ASTM A572 Grade 50 exten steel. Full opening tailgate with field-adjustable hinge and dual cylinders. Four fail-safe, individually adjustable locks that assure a complete seal. Heavy duty, double acting lift cylinder provides a stable 50° dump angle.

WATER SYSTEM:

Our 3/16" Stainless steel water tank offers an available capacity of 500-2,000 gallons. The tri-plex water pump is standard at 80 gpm/2,000 PSI. (Optional water pump flow up to 100 gpm and PSI up to 3,000)

The front-mounted, articulating hose reel features a heavy duty frame mount with high ground clearance and allows for easy engine access. It is directly driven with a 1" x 800', 1 1/4" x 500', or 3/4" x 1,200' capacity.

The standard features of the water system include: a multi-flow water system; 3" water fill line with anti-siphon and 2 1/2" fire hose fitting; curbside water level site tube; 3" water supply line with easy access filter and shutoff valve; low point water drains.

OPTIONS:

- Stainless steel debris body
- HX packages
- Pump-off systems
- Various lighting options
- Tons of storage options from toolboxes to tube racks
- Body flush-out system
- Interior coating in debris tank
- Lateral hose reel kit
- Hydraulic tool circuit
- Wireless remote or pendant remote

* See website for complete listing



* SPECS SUBJECT TO CHANGE WITHOUT NOTICE



888-442-7829 Johnstown, PA • www.gapvax.com • 281-884-8658 La Porte, TX