

**FSA20-EQU18.0, ITEM# 138**  
**LIFT: Cushion Tire Lift - 4,000 LB Capacity**  
**2CC4000 BASE SHERIFF'S CONTRACT WORKSHEET**

**CC4000 CUSHION (COMPACT)**

2CC40004-LE	4,000 lb. Capacity LP Cushion Tire Lift Truck (Compact)
5A20C33	130.0" MFH / 83.0" OAL / 4.5" FFH Simplex
EPA-STD1I	EPA Compliant
UL-STD1I	UL Approved
FKHP42-25I	1.6" X 3.9" X 42" Hook Type - Pallet
GK21-STD1I	GK21 2.1L 4 Cylinder Gas and LPG Engine
1STM-STD1I	Single Speed Powershift Transmission
CARR32-STD1I	32.5" Wide ITA Class II Hook Type Carriage
STLC-STD1I	Cushion, Lugged Steer Tires
DTLC-STD1I	Cushion, Lugged Drive Tires
LBR-STD1I	48" High Load Backrest
VLV3-STD1I	3-Section Valve
TILT-STD1I	Standard Tilt Cylinders
OHG-C3-STD1I	Standard Overhead Guard - 81.0" To Top
PLDS-STD1I	Premium LCD/LED Display
EPSL-STD1I	Engine Protection System
SBIP-STD1I	Separate Brake & Inching Pedals
GSPSPD-STD1I	Ground Speed Control
FSMODL-STD1I	Fuel Saver Mode
ACFR-STD1I	Aluminum Core Corrugated Fin Radiator
PDS-STD1I	Presence Detection System
HDCG-STD1I	Heavy Duty Counterweight Grill
ALARM-STD1I	Electronic Back-up Alarm
WKLT-STD1I	Two Forward LED Working Lights On OHG
STBULT-STD1I	Rear LED Stop/Tail/Back-up Combination Lights
SEATV-STD1I	Comfort (Non-Suspension) Vinyl Seat
OSB-STD1I	Orange Seat Belt
RFM-STD1I	Rubber Floor Mat
LPTNKST33I	Steel LP Tank, Horizontal Fill - 33.5#
LANGENG-STD1I	English Language Markings North/South America
WAR-STD	Standard Warranty - 12 Months, 2000 Hours Full Coverage; 24 Months, 4000 Hours Powertrain



## 2CC4000 - 4,000 lb. Capacity LP Cushion Tire Lift Truck (Compact)

### HIGHLIGHTS

#### Uncompromising Performance

- Powerful GK21 2.1L 4 Cylinder Engine
  - Maximum Torque 110 ft-lb @ 2000 rpm
  - Maximum Horsepower 53 Hp @ 2700 rpm
  - Throttle by Wire Accelerator (no cable)
  - High Efficiency Aluminum Cylinder Heads
  - Individual High Energy Ignition Coils (no distributor)
  - Low vibration Dynamically Balanced
- Engine Protection System (EPS)
- Fuel saver mode reducing fuel consumption up to 14%
- Cyclone Air Filter
- High efficiency Aluminum Core Radiator
- Robust Powershift Automatic Transmission 1F/1R
- Transmission Oil Cooler
- Hydrostatic Power Steering
- Elevated Air Intake
- Maintenance Free Battery
- Premium long lasting Trelleborg Tires
- 500 Hour Service Intervals



#### Superior Operator Comfort

- Premium Full Suspension Grammer Seat
- Tilt Steering Column with Memory function
- Isolated (Rubber mounted) Key Components to reduce vibration
- Rubber floor mat
- Insulated Engine cover
- Convenience tray with clipboard holder
- Separate Brake and Inching Pedals
- Elongated Grab handle Bar
- Open Step with Anti Slip Plate
- Electronic Direction Control
- Premium tires with 3 layers construction for an extra comfortable ride

#### Added Operator Protection and Awareness

- LED work lights
- Premium LCD/LED Display
- Presence Detection System (PDS)
- Dual Action Parking Brake Handle
- Ground speed control
- Password lock
- Anti-Restart Ignition Key Switch
- Transmission Return to Neutral for Start

### KEY FEATURES & BENEFITS

#### EXCEPTIONAL PERFORMANCE

After years of expertise and leadership in material handling solutions, Cat® lift trucks engineered a game changing powertrain for exceptional performance in the toughest material handling conditions. The GK engine family is the industry's most powerful and respected industrial engine family in its class. The engines delivers outstanding performance while maintaining the highest standards of durability and reliability. With a proven track record for quality and dependability, the rugged PowerShift transmission delivers a remarkable performance optimizing engine power and response.

#### OPERATOR COMFORT

A forklift's productivity is not only measured by a strong powertrain, but also by its operator comfort and efficiency. This is why Cat® lift trucks designed an ergonomic operator compartment optimizing comfort, visibility and productivity for long and demanding shifts.



## 2CC4000 - 4,000 lb. Capacity LP Cushion Tire Lift Truck (Compact)

<b>PRESENCE DETECTION SYSTEM</b>	The Patented PDS system, standard on all Cat® lift trucks helps ensure that the operator is following the correct operating procedures. Once the operator leaves the seat and does not engage the park brake, the PDS will disengage the transmission and all hydraulic functions to the mast while activating an audible alarm and a flashing visual warning.
<b>ENGINE PROTECTION SYSTEM</b>	The EPS monitors the Engine Coolant Temperature, Transmission Oil Temperature and Engine Oil Pressure. The system issues a warning and cuts back on engine rpm when parameters go out of range. It also monitors the brake fluid level and warns when the level is too low. The EPS also issues periodic maintenance alerts by displaying them on the screen.
<b>PREMIUM LED/LCD DISPLAY</b>	The standard premium LED/LCD display is connected to the monitoring system alerting the operator if one of the systems is not in check. It includes a Speedometer, Hour Meter, Clock, Travel Direction, Low Fuel Indicator or Fuel Gage, Coolant Temperature, Battery Charging Status, Operator Passcode capability and other systems-related indicators & warnings.

### CONFIGURATION

<b>CHASSIS</b>	1	4,000 lb. Capacity LP Cushion Tire Lift Truck (Compact)
<b>MAST</b>	1	130.0" MFH / 83.0" OAL / 4.5" FFH Simplex
<b>RATINGS &amp; STANDARDS</b>	1	EPA Compliant
<b>RATINGS &amp; STANDARDS</b>	1	UL Approved
<b>FORKS</b>	1	1.6" X 3.9" X 42" Hook Type - Pallet
<b>POWERTRAIN</b>	1	GK21 2.1L 4 Cylinder Gas and LPG Engine
<b>POWERTRAIN</b>	1	Single Speed Powershift Transmission
<b>CARRIAGE</b>	1	32.5" Wide ITA Class II Hook Type Carriage
<b>TIRE OPTIONS</b>	1	Cushion, Lugged Steer Tires
<b>TIRE OPTIONS</b>	1	Cushion, Lugged Drive Tires
<b>LOAD BACKREST</b>	1	48" High Load Backrest
<b>HYDRAULIC ACTIVATION</b>	1	3-Section Valve
<b>TILT CYLINDERS</b>	1	Standard Tilt Cylinders
<b>OVERHEAD GUARD</b>	1	Standard Overhead Guard - 81.0" To Top
<b>PRODUCTIVITY OPTIONS</b>	1	Premium LCD/LED Display
<b>PRODUCTIVITY OPTIONS</b>	1	Engine Protection System
<b>PRODUCTIVITY OPTIONS</b>	1	Separate Brake & Inching Pedals
<b>PRODUCTIVITY OPTIONS</b>	1	Ground Speed Control
<b>PRODUCTIVITY OPTIONS</b>	1	Fuel Saver Mode
<b>SPECIAL APPLICATIONS OPTIONS</b>	1	Aluminum Core Corrugated Fin Radiator
<b>SPECIAL APPLICATIONS OPTIONS</b>	1	Presence Detection System
<b>SPECIAL APPLICATIONS OPTIONS</b>	1	Heavy Duty Counterweight Grill
<b>WARNING / LIGHT OPTIONS</b>	1	Electronic Back-up Alarm
<b>WARNING / LIGHT OPTIONS</b>	1	Two Forward LED Working Lights On OHG
<b>WARNING / LIGHT OPTIONS</b>	1	Rear LED Stop/Tail/Back-up Combination Lights
<b>SEAT</b>	1	Comfort (Non-Suspension) Vinyl Seat
<b>ACCESSORIES</b>	1	Orange Seat Belt
<b>ACCESSORIES</b>	1	Rubber Floor Mat
<b>LP TANK</b>	1	Steel LP Tank, Horizontal Fill - 33.5#
<b>LANGUAGE MARKINGS</b>	1	English Language Markings North/South America

### 2CC4000 WARRANTY

2CC4000	Standard Warranty - 12 Months, 2000 Hours Full Coverage; 24 Months, 4000 Hours Powertrain
---------	---



# SUPERIOR RELIABILITY

**3,000 – 6,500 LB. CAPACITY  
INTERNAL COMBUSTION  
CUSHION TIRE LIFT TRUCKS**



# TRIED-AND-TRUE PERFORMANCE



## A Truck You Can Depend On

The Cat® 3,000-6,500 lb. LP gas cushion tire series offers what businesses demand: fuel economy, reliable performance and greater operator control. Built for dependability, these forklifts can operate in a wide range of indoor applications to move goods, stage pallets or transfer loads.

### KEY INDUSTRIES:

- General Warehousing
- Building Materials
- Fabricated Metal
- Primary Metal
- Lumber And Wood
- Stone, Clay And Glass
- Industrial Equipment
- Chemicals And Allied Products



## EXCELLENT HORSEPOWER AND TORQUE

As the longest running engine in its class, the K21 (53 hp / 2C3000-2CC4000) and K25 (61 hp / 2C4000-2C6500) are designed to work in extreme and demanding conditions. Both deliver high performance with low noise and vibration, excellent fuel economy and meet all CARB and EPA emissions regulations.





# FRONT-TO-BACK DURABILITY

## A Truck With Solid Dependability

Constructed with a heavy-duty mast that features narrow channels and six load rollers, this forklift takes durability to the next level.

### SURROUNDED BY STRENGTH

#### Load Rollers

- Added strength via six load rollers used to support the forward and backward loading of the carriage
- Greater contact, increased stability and extended life of the mast through the use of specially-shaped mast channels and large mast rollers



#### Inching Pedal

- Simultaneously applies and disengages the brake
- Provides slow, controlled acceleration and precise maneuvering in tight locations




#### Drive Axle

- One-piece, single-cast drive axle
- Reduces potential leak points, absorbs the shock from the wheels and reduces stress on the chassis



#### Mast Channels

- Enhanced operator visibility through narrow flanges
- Added mast strength from deep web design
- Increased load capacity due to larger rollers canted three degrees with full-face contact

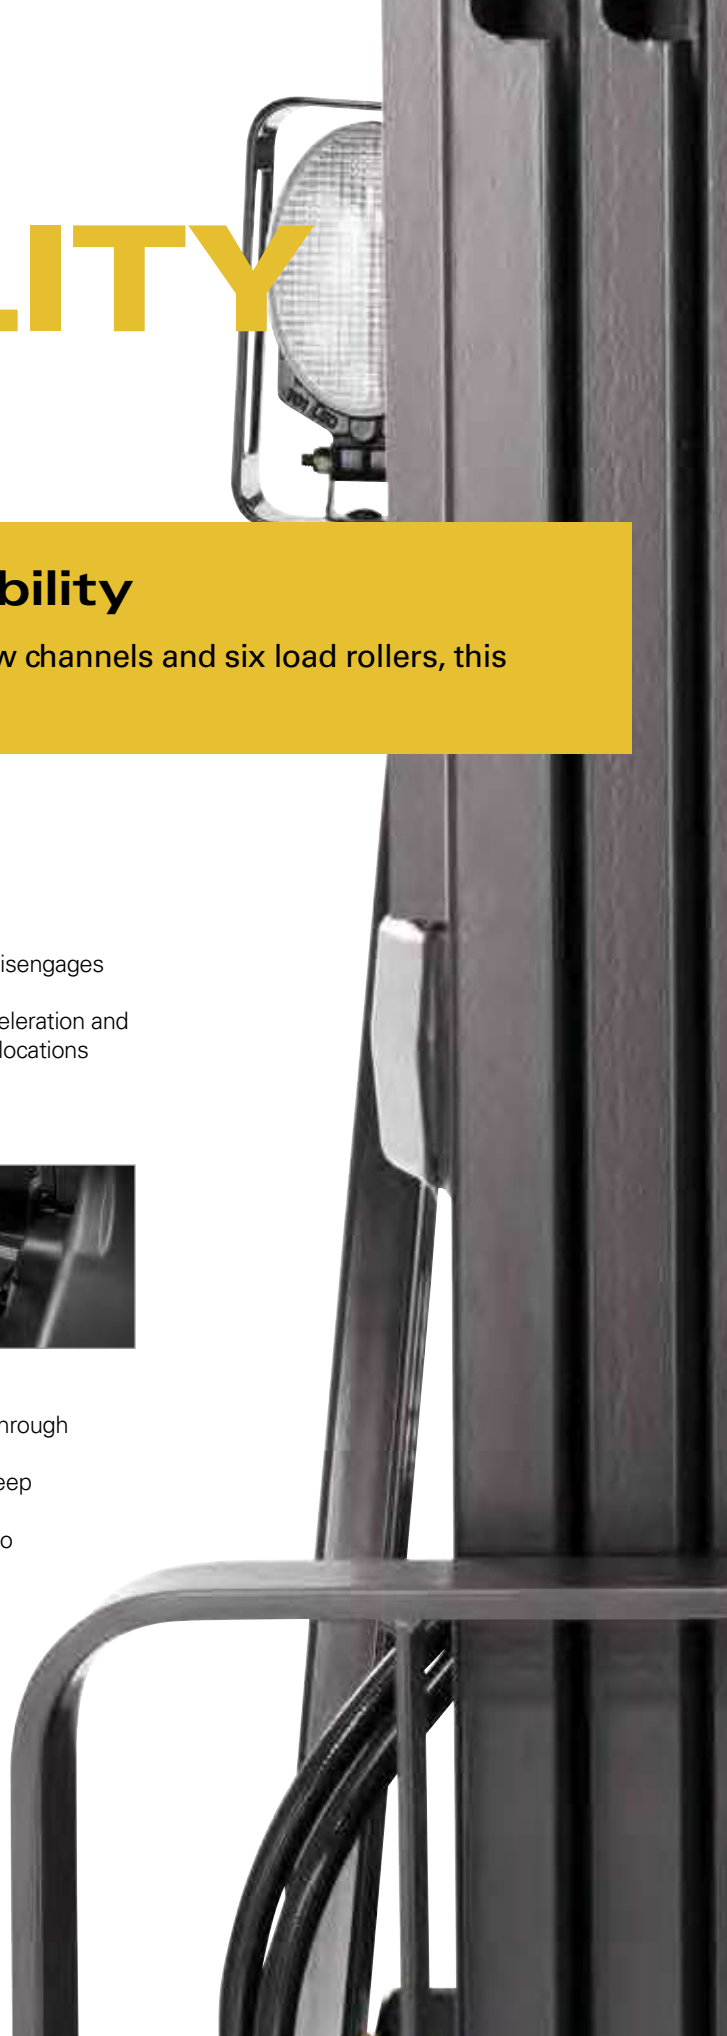





# GIVING YOU TOTAL CONTROL

**Performance tailored to your operation**



## Performance

### Fuel Saver Mode

Controlled by a toggle switch on the dash, this feature helps reduce overall fuel consumption and the risk of premature tire wear. The result: up to 14% more fuel efficiency without affecting the top speed of the truck.\*

### Adjustable Speed Control

Limits top speed in applications that require improved security of loads, congested areas or where pedestrian traffic may be prevalent.



## Service

### Engine Protection System

Provides greater uptime and lower repair costs by notifying your operator when vital fluids are low or engine maintenance is required.

### Maintenance Tools

With up to 500-hour service intervals, on-board diagnostics, display-based indicators and easy access to service components, you can count on maximizing uptime and lowering maintenance costs.

\*Fuel efficiency increase shown against previous model in preliminary testing. Levels may vary based on application.





## Maneuverability

**Hydrostatic Steering** – This feature provides precise movement with less effort. The hydrostatic steering is coupled with a tilt steering column and memory function.



**Hydraulic Levers** – These are ergonomically designed to fit the operator's hand and posture, while providing the accuracy needed for precise maneuvering.



**Optional Fingertip Controls** – These controls are mounted to the armrest and allow the operator to easily manipulate the hydraulic system from a comfortable position.







Local service and support



Genuine OEM parts



Custom financing packages

# MORE CONFIDENCE







Factory warranty for added protection



## Local Support You Can Count On

A Cat lift truck purchase connects you to a variety of material handling solutions, including world-class service and support from your local, trusted dealer. With trained service technicians, a diverse parts inventory and a broad selection of service options, your local dealer can help you lower costs, enhance productivity and more efficiently manage your business.

### FINANCING MADE SIMPLE

Financing your next Cat lift truck is easy with our wide range of flexible leasing and purchasing options. Whether you want to finance or lease, your local Cat lift truck dealer can help customize a package for your business.

### WHEN EVERY PART COUNTS

When buying from your local Cat lift truck dealer, you can rest assured that your genuine OEM parts are manufactured to meet original equipment criteria. Additionally, all Cat lift trucks OEM parts come with a six-month, unlimited-hours warranty.

When speed is critical, our Parts Fast Or Parts Free Guarantee\* ensures next-business-day delivery of all Cat lift trucks parts, or they're free, including freight. If your part doesn't come in by the next business day, we pay for it.

### STANDING BEHIND OUR PRODUCTS

We deliver peace of mind by helping your lift trucks stay on the job. Every new Cat lift truck is covered by a 1-year / 2,000-hours warranty that includes parts and labor, as well as components and systems. With our standard 2-year / 4,000-hours extended powertrain warranty, you'll have the confidence that only comes from owning a Cat lift truck.

\* At dealer's location.

† Programs may be subject to change without notice and may vary by region.

Please ask your local Cat lift truck dealer for complete terms and conditions.

## Specifications

Characteristics				2C3000		2C3500	
1	Capacity – at rated load center	lb	kg	3,000	1,500	3,500	1,750
2	Capacity – at load center-distance	in	mm	24	500	24	500
3	Power			LP Gas		LP Gas	
4	Tire type – cushion or pneumatic			Cushion		Cushion	
5	Wheels (x = driven) – number front / rear			2x / 2		2x / 2	
Dimensions				2C3000		2C3500	
11	Lift with standard two-stage mast – maximum fork height (top of forks)	in	mm	131.0	3,325	131.0	3,325
12	Lift with standard two-stage mast – free fork height	in	mm	4.5	115	4.5	115
13	Forks – length x width x thickness	in	mm	42 x 3.9 x 1.4	1,070 x 100 x 35	42 x 3.9 x 1.4	1,070 x 100 x 35
	Fork spacing – out-to-out minimum / maximum	in	mm	7.9 / 32.3	200 / 820	7.9 / 32.3	200 / 820
14	Tilt – forward / backward	deg		5° / 10°		5° / 10°	
15	Length to fork face	in	mm	81.9	2,080	83.3	2,115
16	Width – with standard tires	in	mm	38.2	970	38.2	970
	Width – with standard tires, wide-stance	in	mm	39.3	997	39.3	997
	Width – with standard tires, wide-axle	in	mm	N/A		N/A	
17	Height – mast lowered	in	mm	83.0	2,105	83.0	2,105
18	Height – seat height	in	mm	43.1	1,096	43.1	1,096
19	Height – top of overhead guard	in	mm	80.9	2,055	80.9	2,055
20	Height – mast extended	in	mm	179.5	4,550	179.5	4,550
21	Minimum outside turning radius	in	mm	69.9	1,775	71.3	1,810
22	Load moment constant	in	mm	15.3	388	15.3	388
23	Minimum aisle - 90° stack - zero clearance w/out load <sup>1</sup>	in	mm	85.2	2,163	86.5	2,198
Performance				2C3000		2C3500	
40	Travel speed loaded / empty	mph	km/h	9.6 / 10.3	15.5 / 16.5	9.6 / 10.3	15.5 / 16.5
41	Lift speed loaded / empty	fpm	mm/s	122 / 124	620 / 630	122 / 124	620 / 630
42	Lowering speed loaded / empty	fpm	mm/s	98.4 / 98.4	500 / 500	98.4 / 98.4	500 / 500
43	Drawbar pull – loaded at 1 mph (1.6 kph)	lb	N	3,750	16,700	3,750	16,700
	Drawbar pull – loaded maximum	lb	N	4,270	19,000	4,270	19,000
44	Gradeability – loaded at 1 mph (1.6 kph)	%		45		40	
	Gradeability – maximum loaded	%		53		47	
Weight				2C3000		2C3500	
50	Empty	lb	kg	6,040	2,740	6,420	2,910
51	Axle load – without load front / rear	lb	kg	2,350 / 3,720	1,070 / 1,690	2,230 / 4,230	1,010 / 1,920
	Axle load – with load front	lb	kg	7,870	3,570	8,670	3,930
Chassis				2C3000		2C3500	
60	Tire size – front, standard	in		18 x 6 x 12.125		18 x 6 x 12.125	
61	Tire size – rear	in		14 x 5 x 10		14 x 5 x 10	
62	Wheelbase	in	mm	46.9	1,190	46.9	1,190
63	Tread width – front, standard tires	in	mm	32.2	818	32.2	818
	Tread width – front, wide-stance tires	in	mm	33.3	845	33.3	845
64	Tread width – rear, standard tires	in	mm	32.3	820	32.3	820
65	Ground clearance – at lowest point of mast	in	mm	3.0	75	3.0	75
66	Ground clearance – at center of wheelbase	in	mm	4.6	116	4.6	116
67	Service brakes	type		Foot, Hydraulic		Foot, Hydraulic	
68	Parking brakes	type		Hand, Mechanical		Hand, Mechanical	
Powertrain				2C3000		2C3500	
80	Engine model			K21E		K21E	
81	Continuous output (S.A.E. gross)	HP	kW	50	37.4	50	37.4
		at rpm		2,400		2,400	
82	Maximum torque (S.A.E. gross)	lb-ft	Nm	111	151	111	151
		at rpm		2,000		2,000	
83	Cylinder / displacement	cu in	L	4 / 126	4 / 2.1	4 / 126	4 / 2.1
84	Transmission type			Powershift		Powershift	
85	Number of speeds forward / reverse			1 / 1		1 / 1	
	Battery	volts		12		12	
Hydraulics				2C3000		2C3500	
86	Relief pressure – For attachments at auxiliary valve	psi	bar	2,630	181	2,630	181
88	Hydraulic flow – For attachments at auxiliary valve	gpm	L/min	19.0	72.0	19.0	72.0


2CC4000		2C4000		2C5000		2C5500	
4,000	2,000	4,000	2,000	5,000	2,500	5,500	2,800
24	500	24	500	24	500	24	500
LP Gas		LP Gas		LP Gas		LP Gas	
Cushion		Cushion		Cushion		Cushion	
2x / 2		2x / 2		2x / 2		2x / 2	
2CC4000		2C4000		2C5000		2C5500	
131	3,330	131.5	3,340	131.5	3,340	130.5	3,315
4.7	120	5.1	130	5.1	130	5.3	135
42 x 3.9 x 1.6	1,070 x 100 x 40	42 x 3.9 x 1.6	1,070 x 100 x 40	42 x 3.9 x 1.6	1,070 x 100 x 40	42 x 4.9 x 1.8	1,070 x 125 x 45
7.9 / 32.3	200 / 820	7.9 / 36.2	200 / 920	7.9 / 36.2	200 / 920	7.9 / 37.8	200 / 960
5° / 10°		5° / 9°		5° / 9°		5° / 6°	
85.6	2,175	90.2	2,290	92.5	2,350	95.1	2,415
40.2	1,021	41.9	1,064	41.9	1,064	43.9	1,115
N/A		44.4	1,128	44.4	1,128	45.5	1,155
N/A		N/A		N/A		N/A	
83.5	2,105	83.0	2,110	83.0	2,110	83.0	2,110
43.1	1,096	43.3	1,100	43.3	1,100	43.3	1,100
80.9	2,055	81.5	2,070	81.5	2,070	81.5	2,070
179.5	4,550	180	4,570	180	4,570	179	4,540
72.8	1,850	77.4	1,965	79.5	2,020	81.3	2,065
15.9	404	16.3	414	16.3	414	17.2	436
88.7	2,254	93.7	2,379	95.8	2,434	98.5	2,501
2CC4000		2C4000		2C5000		2C5500	
9.6 / 10.3	15.5 / 16.5	11.0 / 11.5	17.5 / 18.0	11.0 / 11.5	17.5 / 18.0	10.0 / 10.5	16.5 / 17.0
122 / 124	620 / 630	125 / 130	640 / 660	125 / 130	640 / 660	105 / 105	530 / 540
98.4 / 98.4	500 / 500	98 / 98	500 / 500	99 / 99	500 / 500	98.0 / 98.0	500 / 500
3,660	16,300	4,650	20,700	4,620	20,500	4,870	21,600
4,160	18,500	5,070	22,600	5,840	26,000	6,380	28,400
36.0		45		37		36	
42.0		51		43		41	
2CC4000		2C4000		2C5000		2C5500	
6,980	3,170	7,310	3,320	8,110	3,680	9,010	4,090
2,040 / 4,890	930 / 2,220	3,050 / 4,290	1,380 / 1,950	2,800 / 5,340	1,270 / 2,420	3,010 / 5,990	1,370 / 2,720
9,440	4,280	9,990	4,530	11,470	5,200	12,640	5,730
2CC4000		2C4000		2C5000		2C5500	
18 x 7 x 12.125		21 x 7 x 15		21 x 7 x 15		21 x 8 x 15	
14 x 5 x 10		16 x 6 x 10.5		16 x 6 x 10.5		16 x 6 x 10.5	
46.9	1,190	55.1	1,400	55.1	1,400	55.1	1,400
33.2	843	34.9	886	34.9	886	35.9	912
N/A		37.4	950	37.4	950	37.5	952
32.3	820	35	890	35	890	35	890
3.0	75	3.1	80	3.1	80	3.1	80
4.6	116	5.5	139	5.5	139	5.5	139
Foot, Hydraulic		Foot, Hydraulic		Foot, Hydraulic		Foot, Hydraulic	
Hand, Mechanical		Hand, Mechanical		Hand, Mechanical		Hand, Mechanical	
2CC4000		2C4000		2C5000		2C5500	
K21E		K25E		K25E		K25E	
50	374	63	46.9	63	46.9	63	46.9
2,400		2,700		2,700		2,700	
111	151	139	188	139	188	139	188
2,000		1,600		1,600		1,600	
4 / 126	4 / 2.1	4 / 152	4 / 2.5	4 / 152	4 / 2.5	4 / 152	4 / 2.5
Powershift		Powershift		Powershift		Powershift	
1 / 1		1 / 1		1 / 1		1 / 1	
12		12		12		12	
2CC4000		2C4000		2C5000		2C5500	
2,630	181	2,630	181	2,630	181	2,630	181
19.0	72.0	23.5	89.1	23.5	89.1	23.5	89.1

**NOTE:** These specifications assume the use of drive axles, tires and tilt angles specified. Any modification to specifications, or any other combination of specifications made after the shipment of the truck, requires prior written approval from Mitsubishi Caterpillar Forklift America Inc. (MCFA). (See ANSI/ITSDF B56.1.) Also be advised that overall operating visibility may be affected by the mast configuration and mast options of your truck. Therefore, you may need to add ancillary [auxiliary] devices or modify your operating practices. Consult your dealer for further information.



Call-out numbers shown in the diagram correspond to the first column of the specifications chart.

2C6000		2C6500	
6,000	3,000	6,500	3,300
24	500	24	500
LP Gas		LP Gas	
Cushion		Cushion	
2x / 2		2x / 2	
2C6000		2C6500	
130.5	3,315	131.0	3,345
5.3	135	5.5	140
42 x 4.9 x 1.8	1,070 x 125 x 45	42 x 4.9 x 1.8	1,070 x 125 x 45
7.9 / 37.8	200 / 960	7.9 / 37.8	200 / 960
5° / 6°		5° / 6°	
96.5	2,450	97.6	2,480
43.9	1,115	43.9	1,115
45.5	1,155	45.5	1,155
N/A		N/A	
83.0	2,110	88.0	2,230
43.3	1,100	43.3	1,100
81.5	2,070	81.5	2,070
179	4,540	181	4,570
82.5	2,095	83.7	2,125
17.2	436	17.4	441
99.6	2,531	101	2,566
2C6000		2C6500	
10.0 / 10.5	16.5 / 170	10.0 / 10.5	16.5 / 170
105 / 105	530 / 540	105 / 105	530 / 540
98 / 98	500 / 500	98 / 98	500 / 500
4,840	21,500	4,820	21,500
6,800	30,200	7,280	32,400
33		31	
38		35	
2C6000		2C6500	
9,440	4,280	9,880	4,480
2,820 / 6,580	1,280 / 2,980	2,680 / 7,200	1,220 / 3,260
13,320	6,040	14,010	6,350
2C6000		2C6500	
21 x 8 x 15		21 x 8 x 15	
16 x 6 x 10.5		16 x 6 x 10.5	
55.1	1,400	55.1	1,400
35.9	912	35.9	912
37.5	952	37.5	952
35	890	35	890
3.1	80	3.1	80
5.5	139	5.5	139
Foot, Hydraulic		Foot, Hydraulic	
Hand, Mechanical		Hand, Mechanical	
2C6000		2C6500	
K25E		K25E	
63	46.9	63	46.9
2,700		2,700	
139	188	139	188
1,600		1,600	
4 / 152	4 / 2.5	4 / 152	4 / 2.5
Powershift		Powershift	
1 / 1		1 / 1	
12		12	
2C6000		2C6500	
2,630	181	2,630	181
23.5	89.1	23.5	89.1

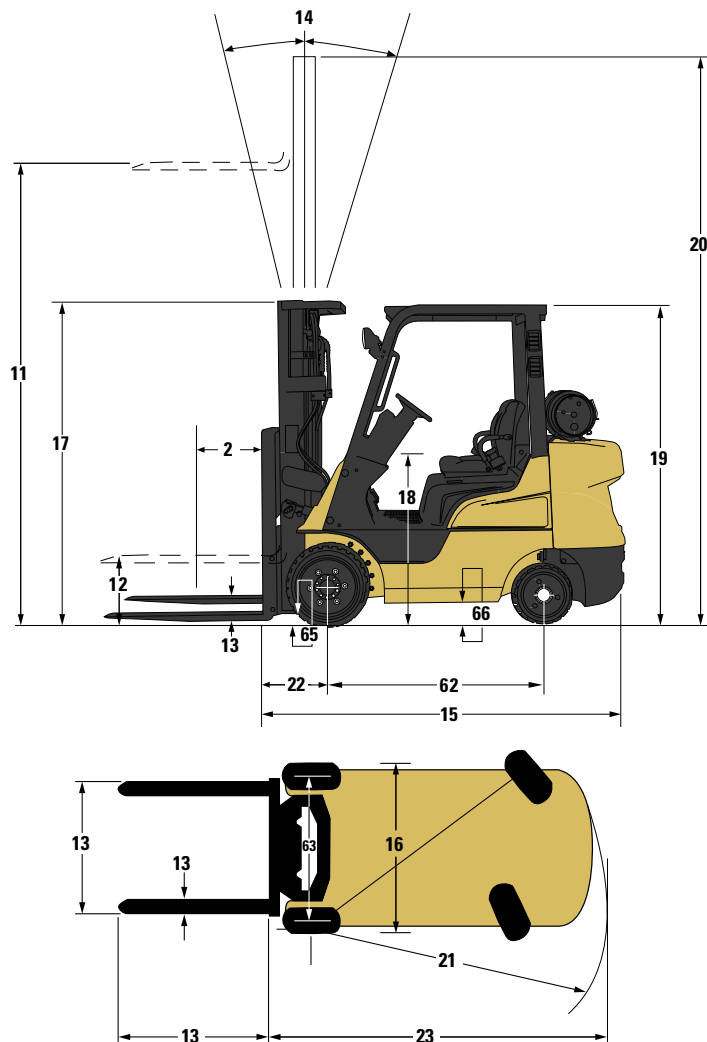

## Safety Standards


These trucks meet American National Standards Institute/Industrial Truck Standards Development Foundation, ANSI/ITSDF B56.1.

UL-Classified by Underwriters Laboratories, Inc., as to fire and electric shock hazard only. Availability: Types G, LP and D standard. Types GS, LPS and DS optional. Users should be aware of, and adhere to, applicable codes and regulations regarding operator training, use, operation, and maintenance of powered industrial trucks, including:

- ANSI/ITSDF B56.1.
- NFPA 505, fire safety standard for powered industrial trucks — type designations, areas of use, maintenance and operation.
- Occupational Safety and Health Administration (OSHA) regulations that may apply.

Contact your Cat lift truck dealer for further information, including operator training programs and auxiliary visual and audible warning systems, fire extinguishers, etc., as available for specific user applications and requirements. Specifications, equipment, technical data, photos and illustrations based on information at time of printing and subject to change without notice. Some products may be shown with optional equipment.

# 2C3000-2C6500 OPTIONS

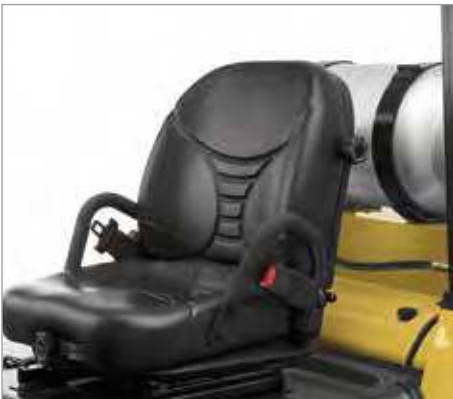

## A Custom Fit

### OPTIONS FOR PRODUCTIVITY, COMFORT AND MORE:

#### **Cotton / Fiber Protection Package**

Provides a high-speed fan and radiator screen to keep the system clean from dust and debris.

#### **Swivel Seat**

This option, which makes entering and exiting the truck easier, is great for short shuttles.

#### **Foundry / Brick Protection Package**

Ideal for demanding applications like block and brick fabrication:

- Dust-proof front axle
- Hydraulic tank breathers
- Elevated air intake / pre-cleaner
- Transmission oil filter
- Dual element air filter
- Tilt cylinder boots
- Dashboard indicators

#### **Rear Grab Bar With Horn Button**

This option is ideal for short shuttle applications and those with a significant amount of reverse travel.

#### **Light And Strobe Packages**

For darker environments or for applications with higher traffic, these optional light packages help improve operator visibility and visibility of the forklift.

Contact your local dealer to learn more about the different options available.



**Your Cat lift truck dealer** can provide additional options and features to specialize your lift truck for your unique application. Operator training and custom financing programs are also available to help find the right fit for your business.

Helping move businesses forward – that's how we're built.

**BUILT FOR IT.™**

**1-800-CAT-LIFT | [www.cat-lift.com](http://www.cat-lift.com)**

© 2015 MCFA. All Rights Reserved. CAT, CATERPILLAR, BUILT FOR IT, their respective logos, "CaterpillarYellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. All registered trademarks are the property of their respective owners. Some products may be shown with optional equipment.

CECT0012

09/15

**CAT<sup>®</sup> Lift Trucks**