



Date: August 28, 2020

Reference: : FSA20 - EQU18.0 Item # 467 600 Amp Automatic Transfer Switch GTS600 - PSTS 600

We are pleased to offer the following quote for the above project:

Quantity 1 - GTS Series Automatic Transfer Switch consisting of the following features and accessories:

- 600 Amp, 3 Pole, 277/480 VAC three phase, 60 Hz, with 2-Wire Start Circuit
 - Utility Voltage Sensing Controls:
 - Adjustable Drop-out and Pick-up
 - Adjustable Utility Interrupt Delay
 - Adjustable Logic Controls:
 - Minimum Standby Voltage
 - Minimum Standby Frequency
 - Engine Warmup
 - Inphase Monitor
 - Time Delay Neutral
 - Return to Utility
 - Engine Cooldown
 - Transfer on Exercise
- Auto/Normal/Standby switch
- Prefered Source Selector switch
- Remote Auto Control circuit
- UL 1008 Listed, CSA Certified
- NEMA 3R Enclosure
- Std set of 3 Manuals
- 2-Year Extended Warranty

Quantity 1 - Start Up

Quantity 1 - Factory FOB, Offloading by others



Quote

Page

Hwy 59 & Hillside Rd. Waukesha, WI 53187 USA (262) 544-4811 fax: (262) 698-9372 www.generac.com

0020379875

1

QUOTED FOR:

ACF STANDBY SYSTEMS, LLC 9311 SOLAR DR TAMPA FL 33619-4403 Date

08/20/2020

Expiration Date 02/16/2021

Account # 0001000146

FSA20 - EQU18.0 Item # 467 600 Amp Automatic Transfer Switch GTS600 - PSTS 600

ltem#	/ Description	Line Item	U/M	Quantity	Unit Price	Net Sales Amoun			
GTS	TRANSFER SWITCH - GTS								
	TRIP TO NEUTRAL - NO TRIP TO NEUTRAL								
	SWITCH Type - WN SWITCH (600-2600A)								
	RATING: Select One - 600 A								
	POLE: Select One - 3 POLE SWITCH								
	FREQUENCY: Select One - 60 Hz								
	VOLTAGE: Select One - 277/480 VAC 3PHASE								
	CHICAGO CODE - NO CHICAGO CODE								
	INSTRUMENT PACK - NO INSTRUMENT PACKAG	E							
	ACCESSORIES - MAN 3-POSITION SELECTOR								
	ACCESSORIES - PREF SOURCE SELECTOR SWI	ACCESSORIES - PREF SOURCE SELECTOR SWITCH							
	ACCESSORIES - REMOTE AUTO CONTROL CIRCUIT								
	AUXILARY ACCESSORIES - NONE								
	ENCLOSURE: Select Type - NEMA 3R ENCLOSURE								
	MANUAL: Select # of Copies - Std set of 3 Manuals								
	GLOBAL ELECTRIC CERTIFICATION - UL LISTED								
	WARRANTY OPTIONS - TWO YEAR EXTENDED WARRANTY								
	SPECIAL OPT select if required - Special Options NOT required								
	Model -Sales/Mktg/MM/Type Code - GTS060N-3K2LDNCN								
	OEM - Generac								
DEW-	EXWAR500011 G/H/M/TX 400-800 2C 2 YR	20 / 10	EA						

Automatic Transfer Switch

600 - 1,000 Amps, 600 VAC

Type WN Load Shed Capable



FSA20 – EQU18.0 Item # 467 600 Amp Automatic Transfer Switch GTS600 - PSTS 600

- Standard Time Delay Neutral Will Reduce Switchover Problems
- Logic Control with Inphase Monitor Regulates Switch Functions and Allows Adjustable Switch Settings With LED Indicators
- Control Switches Located on the Front of the Door for Ease of Operation
- All Switches are UL 1008 Listed and CSA Certified
- Electrically-Operated, Mechanically-Held and Interlocked Main Contacts with Break Before Make Design for Fast, Positive Connections
- Rated for All Classes of Load, 100% Equipment Rated, Both Inductive and Resistive With No Derations
- 3 and 4 Pole 600 VAC Contactors
- 160 Millisecond Transfer Time

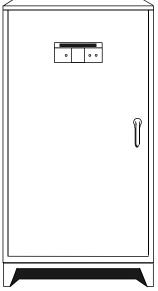


Image used for illustration purposes only

FEATURES

STANDARD FEATURES

- Electrically Operated and Mechanically Held
- · Weekly Exerciser
- . Main Contacts Are Silver Alloy to Resist Welding and Sticking
- . Conformal Coating Protects All Printed Circuit Boards
- Indicating LED's for Switch Position—Normal, Emergency, and Standby Operating
- NEMA 12 Enclosure With Hinged Door and Key-locking Handle
- · Three-Position Switch—Fast Test, Auto, Normal Test
- Arc Chutes on Main Contacts

OPTIONAL ACCESSORIES

- NEMA 3R, 4 & 4X Enclosure
- Exterior AC Meter Package
- 4-pole Design for Neutral Isolation
- · Remote Automatic Start-Stop Control Circuit
- · Signal Before Transfer Contacts
- Return to Normal Timer Bypass
- "Trip to Neutral" with Mechanical Latch for Load Shedding or Sequencing Applications
- "Permissive" Switch for MPS Applications to Prevent Transfer Until Adequate Power Capacity is Obtained
- Single or Double Sets of Auxiliary Contacts
- · Preferred Source Selector Switch

Automatic Transfer Switch

600 - 1,000 Amps, 600 VAC

Type WN Load Shed Capable

GENERAC* INDUSTRIAL POWER

GTS CONTROL SYSTEMS

LOGIC CONTROL WITH INPHASE MONITOR

Utility Voltage				
Drop Out	75 – 95% (Adj.)			
Pickup	85 – 95% (Adj.)			
Line Interrupt	0.1 – 10.0 Sec. (Adj.)			
Engine Minimum Run	5 – 30 Min. (Adj.)			
Engine Warmup	5 – 180 Sec. (Adj.)			
Return to Utility	1 – 30 Min. (Adj.)			
Engine Cooldown	1 – 30 Min. (Adj.)			
Standby Voltage	85 – 95% (Adj.)			
Standby Frequency	80 – 90% (Adj.)			
Time Delay Neutral	0.1 – 10.0 Sec. (Adj.)			
Transfer on Exercise	On/Off Switch			
Warmup Timer Bypass	On/Off Switch			
Time Delay Neutral Bypass	On/Off Switch			
Inphase Monitor	On/Off Switch			

WITHSTAND CURRENT - 600 VOLT GTS SERIES


GTS Rated Amps	<mark>600</mark>	800	1,000			
FUSE PROTECTED	FUSE PROTECTED					
Maximum RMS Symmetric	Maximum RMS Symmetrical					
Fault Current – Amps	200,000	200,000	200,000			
Maximum Fuse						
Size – Amps	800	1,200	1,600			
Fuse Class	L,T	L	L			
CIRCUIT BREAKER PROTECTED (see separate sheet for specific circuit breakers)						
Maximum RMS Symmetrical						
Fault Current – Amps	42,000	65,000	65,000			
Protective Device Continuous						
Rating (Max) – Amps	750	1,250	1,250			

- Tested in accordance with the withstand and closing requirements of UL 1008 and CSA Standards
- Current ratings are listed @ 480 VAC

Type WN Load Shed Capable



UNIT DIMENSIONS*

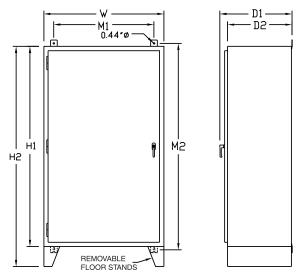



GTS Rated Amps		re Height (mm)	Enclosure Width - in (mm)	Wall Mount Bolt Pattern - in (mm)		Enclosure Depth - in (mm)		Weight - lbs (kg)
	H1	H2	W	M1	M2	D1	D2	
600	60 (1,524)	66 (1,676)	36 (914)	30 (762)	62 (1,575)	23.5 (597)	20 (508)	650 (295)
800	60 (1,524)	66 (1,676)	36 (914)	30 (762)	62 (1,575)	23.5 (597)	20 (508)	700 (318)
1,000	60 (1,524)	66 (1,676)	36 (914)	30 (762)	62 (1,575)	23.5 (597)	20 (508)	700 (318)


^{*} All measurements are approximate and for estimation purposes only. Specification characteristics may change without notice. Please contact a Generac Power Systems Industrial Dealer for detailed installation drawings.

TERMINAL LUG WIRE RANGES

GTS Rated	Connec	tor Terminals		Neutral Bar	Ground Lug (1 Provided)
Amps	# Lugs per Pole	Lug Wire Range	# Lugs	Lug Wire Range	Lug Wire Range
600	2	500 MCM – 1 AWG	8	750 MCM – 1/0 AWG	350 MCM – 6 AWG
800	4	500 MCM - 4/0 AWG	12	750 MCM – 1/0 AWG	350 MCM – 6 AWG
1,000	4	500 MCM - 4/0 AWG	12	750 MCM – 1/0 AWG	350 MCM – 6 AWG

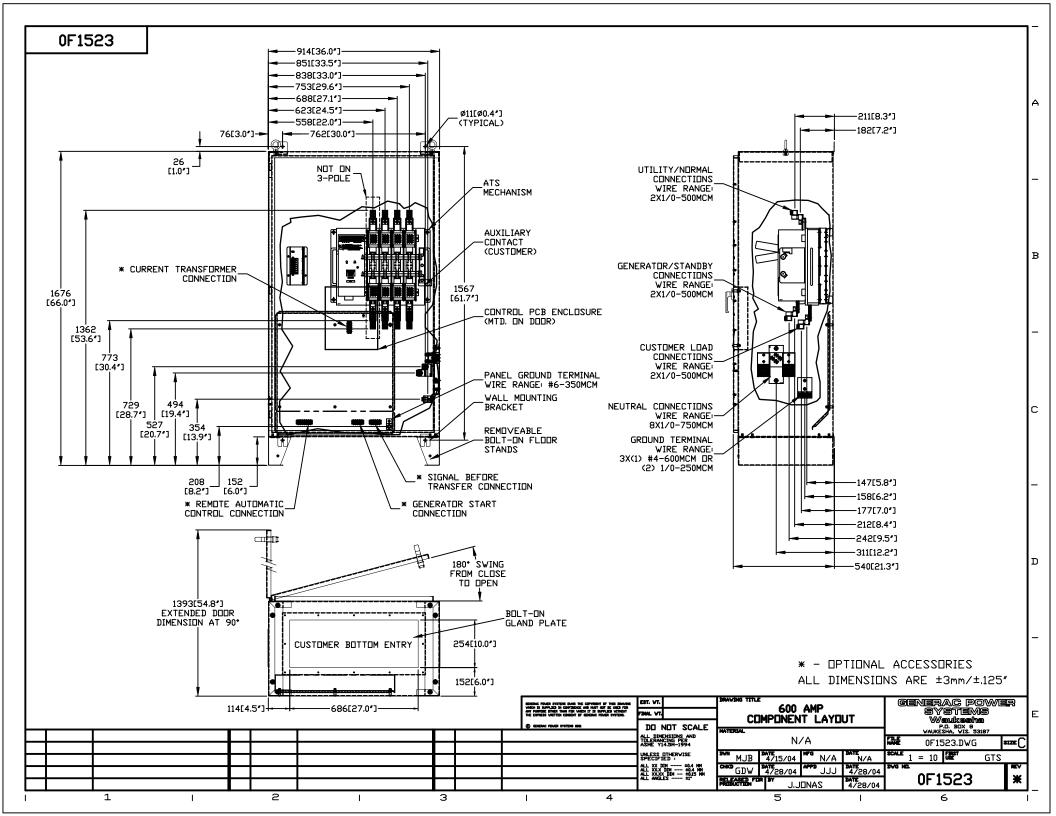

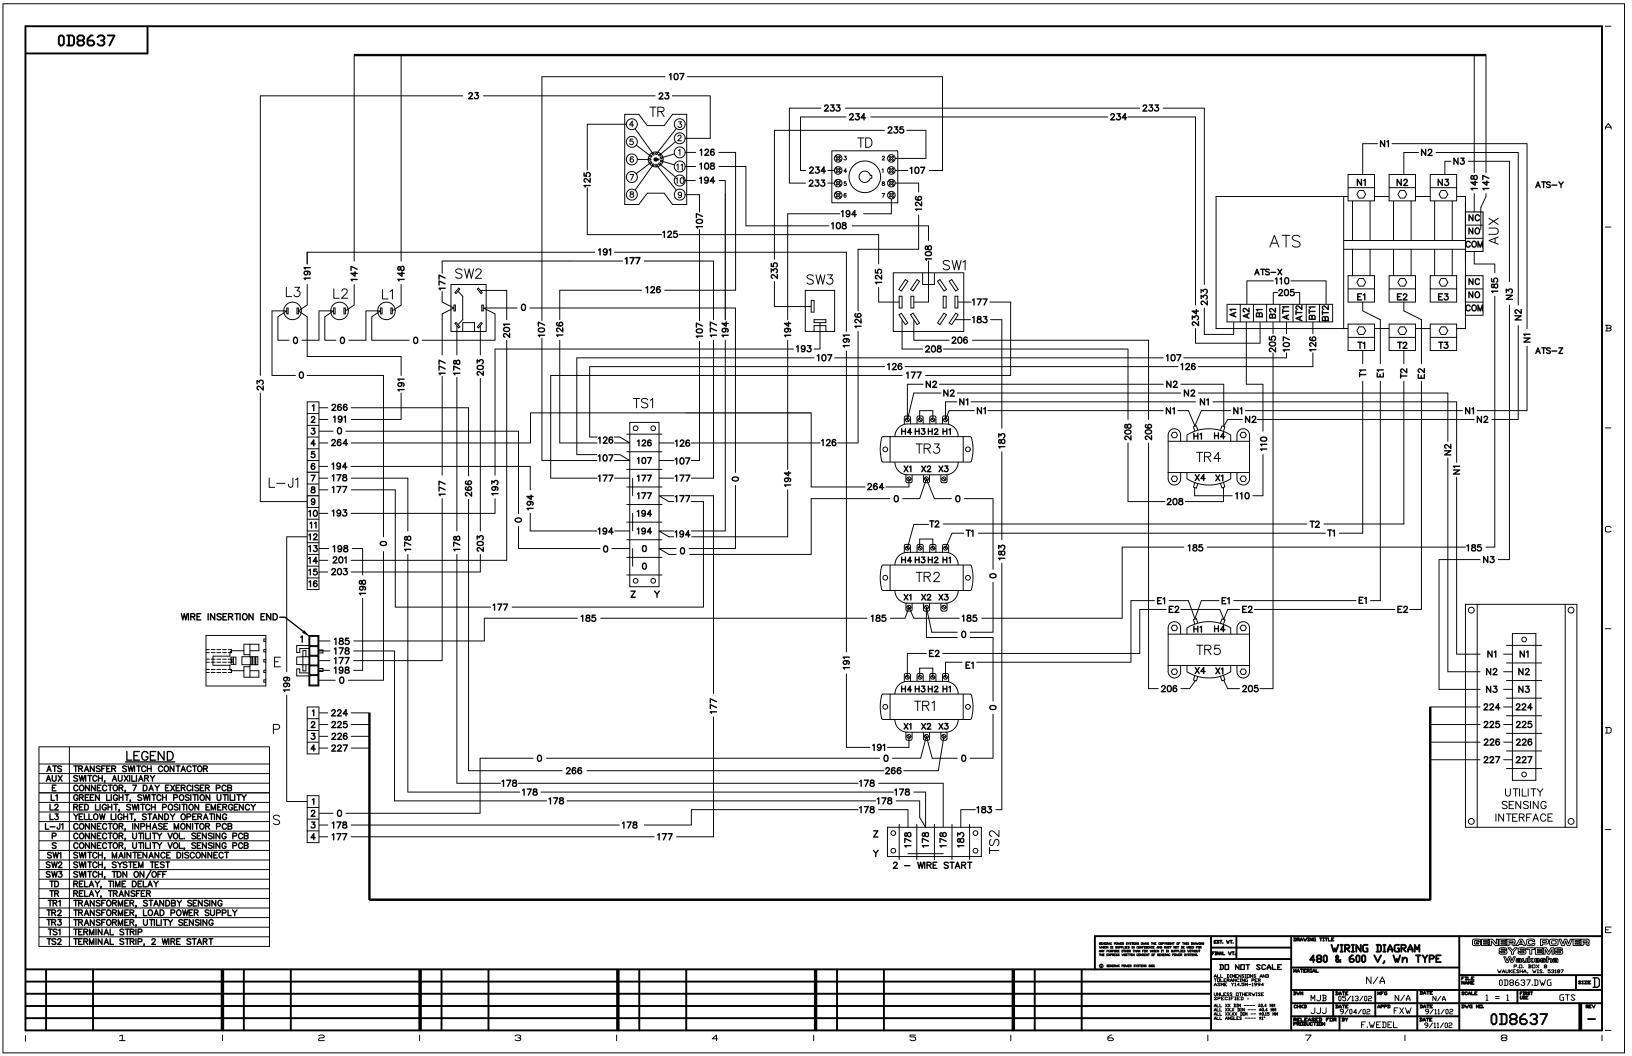

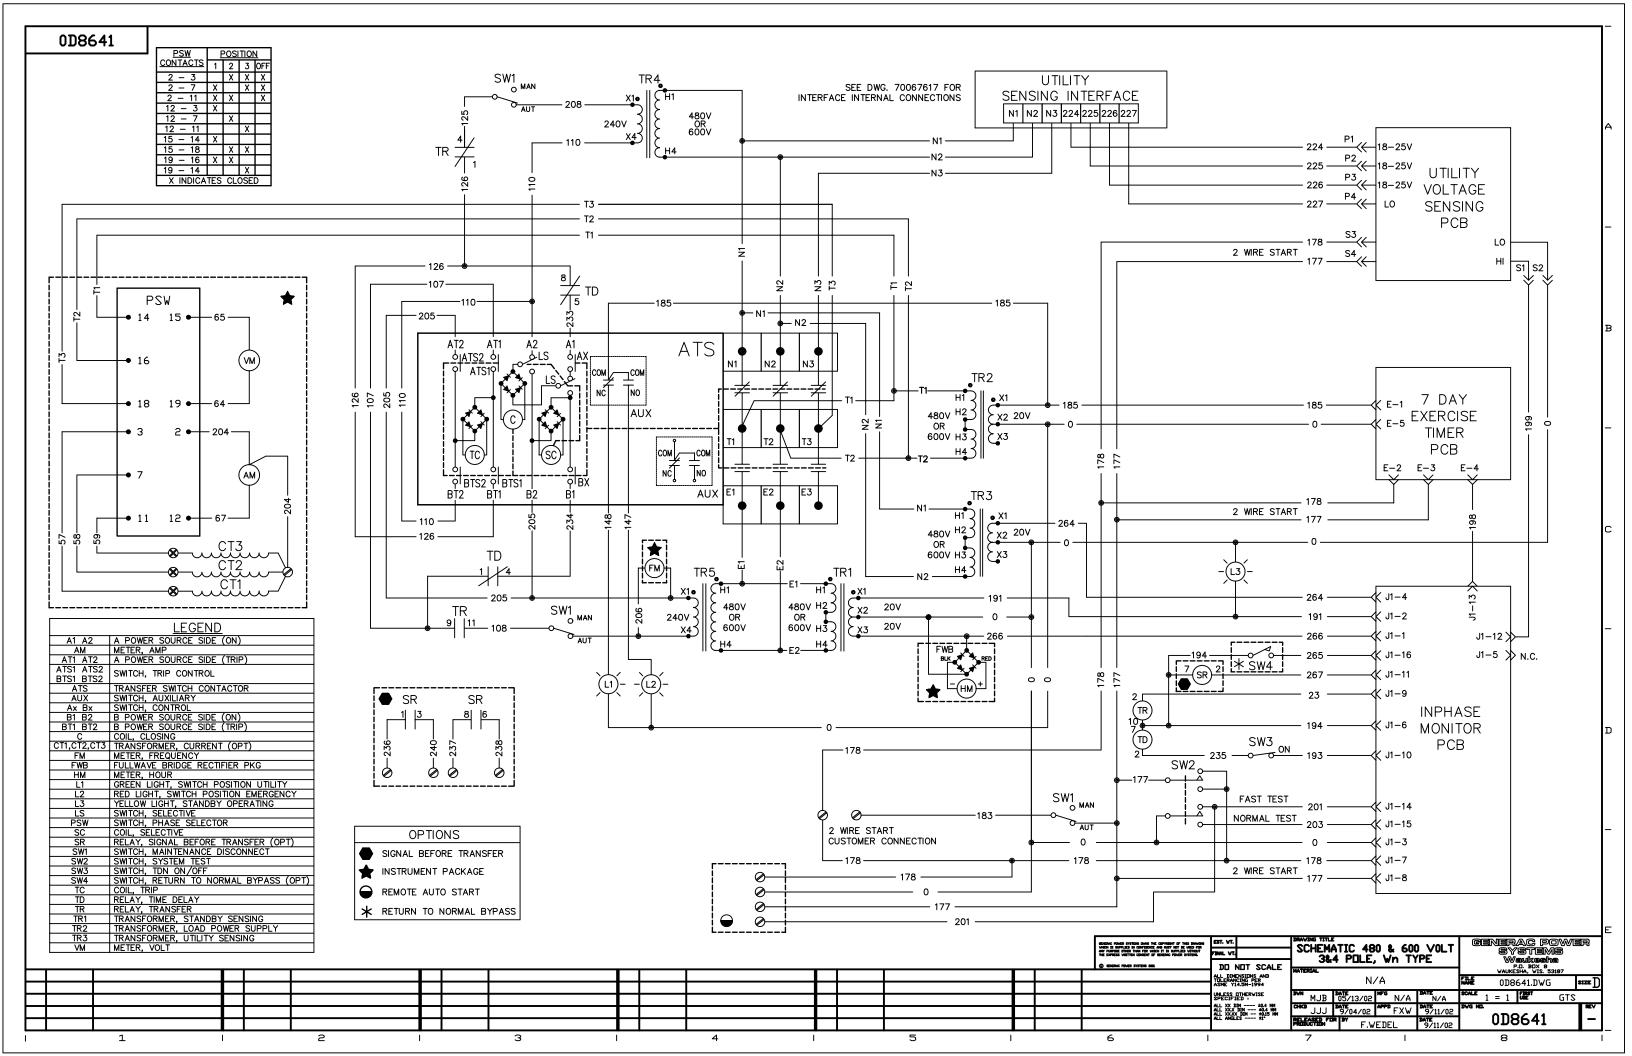



Certification of Quality

Generac Power Systems certifies that the products we manufacture have been built and tested in accordance with strict internal and external standards for quality. Our quality management system has been registered with the internationally recognized ISO 9001:2008 standard and our products comply with external standards that include, but are not limited to, CSA, NEMA, EGSA, ISO, and UL.

The Generac Quality Management System (GQMS) ensures the highest standards of quality at every level of production, from raw materials to the finished product. This includes receiving inspection, in-process checks, product and process audits, testing, final inspections, and shipping standards.

Tests of our products are performed in accordance with our internal procedures and controlled through the GQMS to ensure accuracy and effectiveness. The testing process and product designs comply with external standards which may include, but are not limited to: ISO 8528-5, ISO 3046, NFPA 99, NFPA 110, BS 5514, SAE J1349, and DIN 6271.

Generac Power Systems has over one million square feet of manufacturing space and over 2000 employees dedicated to designing and manufacturing power generation equipment in our multiple State of Wisconsin, USA factories. All of our installed and mobile generators are built with pride by our skilled American workforce to ensure our customers receive the quality that they expect from Generac.

We are committed to producing quality products for both our internal and external customers. We will continuously improve our processes and diligently measure all aspects of our business.

Daniel Waschow

Vice President of Quality Generac Power Systems, Inc. Waukesha, Wisconsin USA





CERTIFICATE



This is to certify that

Generac Power Systems, Inc.

S45 W29290 Hwy. 59 Waukesha, WI 53189 United States of America

with the organizational units/sites as listed in the annex

has implemented and maintains a Quality Management System.

Scope:

Design, Manufacturing, and Distribution of Generators and Power Products.

Through an audit, documented in a report, it was verified that the management system fulfills the requirements of the following standard:

ISO 9001: 2015

Certificate registration no. 10012920 QM15

Date of original certification 2013-12-09

Date of certification 2018-07-16

Valid until 2021-07-15

Brad McGume





DQS Inc.

Brad McGuire Managing Director







Annex to certificate Registration No. 10012920 QM15

Generac Power Systems, Inc.

S45 W29290 Hwy. 59 Waukesha, WI 53189 United States of America

Location	Scope
----------	-------

10012920

Generac Power Systems, Inc. S45 W29290 Hwy. 59 Waukesha, WI 53189 United States of America Design, Manufacturing of Generator Components and Distribution of Service Parts.

10012922

Generac Power Systems, Inc. 211 Murphy Dr. Eagle, WI 53119 United States of America Manufacturing and Distribution of Generators.

10012923

Generac Power Systems, Inc. 757 N. Newcomb St. Whitewater, WI 53190 United States of America Manufacturing and Distribution of Generators and Manufacture of Generator components.

10012924

Generac Power Systems, Inc. 900 N. Parkway Jefferson, WI 53549 United States of America

Manufacturing of Generators and Power Products.

10013528

Generac Power Systems 3815 Oregon St. Oshkosh, WI 54902 United States of America Manufacturing of Generators.

Remote Location Scope

10014175

Generac Power Systems, Inc. 351 Collins Road Jefferson, WI 53549 United States of America The remote location at Jefferson, WI performs the following primary functions: Parts and Components Receiving, Inventory, and Distribution to Generac Locations.

