



REF: Interstate model 16BST Trailer per Florida Sheriff's Association contract# FSA20-EQU18.0, Item# 435

Interstate model 16BST (Standard Equipment)

General description: 16,000 lb. capacity tag-along trailer with

beavertail & ramps.

Load capacity: 16,000 lbs. at 55 M.P.H. (G.V.W.R. 20,750 lbs.)

Overall length: 27'-3"

Deck length: 20'-0" (16'-6" flat deck + 3'-6" beavertail)

Deck width: 8'-0"

Deck height: 35" unloaded

Frame construction: Mainbeams: W12" x 16 lbs. per ft., grade 50

Hi-tensile.

Crossmembers: 6" I-beam x 3.7 lbs per ft.,

run between mainrails on 24" centers.

Decking: 2" nominal oak secured to crossmembers

with 5/16" torque screws. 3/16" Diamond-plate from mainrails to perimeter frame.

Headboard: 2" x 5" rectangular tube, full width of trailer.

Standard paint: Black acrylic enamel.

(Optional colors available)

Factory Installed Options Included

Spare Tire & Wheel Spare Tire Carrier Lockable Toolbox Lid 12,000 lb. Jack 2" x 3/8" Rub Rail & Stake Pockets Vertical Ramp Storage

20' Flat Deck + 5' Beavertail Crossmembers on 16" centers Suspension: Dexter multi-point spring

with equalizers.

Axles: (2) Dexter 8,000 lb. capacity with

oil bath hubs.

Brakes: 12-1/4" x 3-3/8" electric with integral

 $break\text{-}away\ system.$

Wheels: 8 hole steel disc. Tires: 215/75R17.5, (H),

Ramps: 58" x 21.5" traction with spring assist.

Jack: 10,000 lb. top crank.

Hitch: 4 position cast steel pintle eye,

1-5/8" stock, 2-7/8" I.D.

Tie downs: (6) heavy duty D-rings, 3 per side.
Lights: 12 volt DOT & ICC approved. All lights

are sealed beam type and flush mounted in rubber grommets. Wiring is run in flexible neoprene jacket and

modular in design. 7 way plug.






1101 HERITAGE PARKWAY

MANSFIELD, TEXAS 76063

817/453-5402 800/433-5384

Fax: 817/453-5445

Visit our Web site at www.interstatetrailers.com

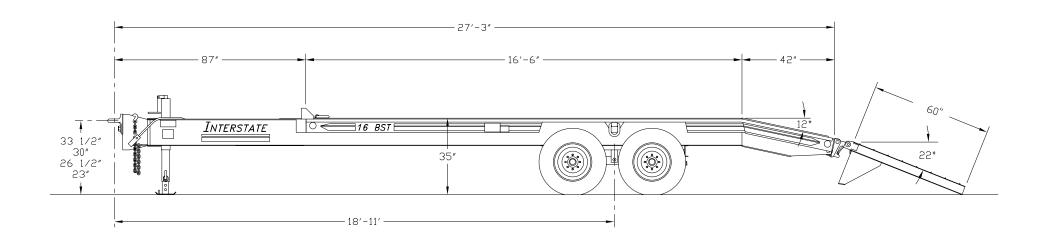

MODEL 16BST

CAPACITY: 16,000# @ 55 MPH Main Rails: W12" x 16" A572 Gr 50 - High Tensile Trailer Weight: 4750# Crossmembers: 6" Jr. I Beam - High Tensile

Overall Length: 27' 3" Heavy Duty Axles: (2) 8,000#

96"/102" Overall Width: Electric 12 1/4" x 3 3/8" Heavy Duty Brakes: Platform Length: 20' 0" Jack: 10,000# Top Crank

Platform Height: Heavy Duty Suspension: Spring Type

Dovetail Length: (4) 215/75R x 17.5 - 16 Ply Radial Tires: Ramp Length: 60" Heavy Duty Wheels: (4) 6.00 x 17.5 - 8 Hole Disc

211/2" Ramp Width: Lights & Electric: LED Sealed Beam System/ICC &

DOT Approved Decking: 2" Nominal Hardwood

> Hitch: Adjustable Pintle Eye - 4 Position

Break-A-Way Switch System with Gel Cell Battery

Interstate Trailers, Inc. reserves the right to change design, material and/or specifications without notice and without incurring any obligation to such changes.

Your **EMERGIATE** Dealer Is