

COMPACT TRACK LOADERS

AP-BR510	510 HYDRAULIC BREAKER MODEL 510	595#	\$ 10,149
	OPTION You May Select a Mount or Hose Kit		
-03	Skid Steer Plate with Bolt-On Breaker Mount (317-349A)	350#	\$ 1,009
-05	SS Plate with QA Breaker Mount (317-392A)	340#	\$ 940
-23	102" Skid Steer Hose (317- 353A)	15#	\$ 317

AP-AB72 & AP-AB84 Angle Brooms

[RETURN TO INDEX](#)

12-30 GPM

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s

Attachments



1/2" Flat Faced Couplers Included
 Overall Height: 33" Approx.
 Brush Diameter: 32"
 Brush Rotor Shaft: Quick Change Broom Core with
 No Hydraulic Breakage in Changeover
 Hex Drive System: Replaceable
 Brush Bristle: 100% Poly or 100% Metallic or 50/50
 Hood: Sheet Metal
 Jack Stands: Standard
 Angling: Manual Angling 30 Degrees Left or Right or
 Hydraulic Angling
 Integral Float Control:
 Spring Loaded w/Adjustable Down Pressure & Stops
 Brush Speed Range: 100 - 230 RPM
 Hydraulic Hoses
 Hydraulic Couplers
 Additional Accessories:
 Metal Shroud Extension
 Dust Suppression System
 Marker Indicators
 Rubber Dust Deflector

Hydraulic GPM Range: 12-30 GPM
 Rated Flow Standard Motor: 25 GPM @ 230 RPM
 Minimum Hydraulic Flow Req.: 12 GPM @2000 PSI
 Hitch: Skid Steer
 Sweeping Width: 72", 84"
 Sweeping Width @ 30 Degree Max. Angle:
 72: 64", 84: 76"

HIGH FLOW: Allows higher GPM units to be used by
 diverting excess GPM (above 25 GPM) back to the tank.

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-AB72	Angle Broom - 72" Sweeping Width	865#	1022#	\$ 2,413
AP-AB84	Angle Broom - 84" Sweeping Width	884#	1038#	\$ 2,902
<u>YOU MUST CHOOSE ONE ANGLING FEATURE</u>				
FOR 12 - 24 GPM				
-01	Standard Flow w/Hydraulic Angling	15#	15#	\$ 1,304
-02	Standard Flow w/Manual Angling	10#	10#	\$ 486
FOR 25 GPM AND ABOVE ONLY				
-03	High Flow w/Hydraulic Angling - Must use Option -24	15#	15#	\$ 1,603
-04	High Flow w/Manual Angling - Must use Option -24	10#	10#	\$ 784
<u>YOU MUST CHOOSE ONE BROOM ASSEMBLY</u>				
-14	Poly Bristles	220#		\$ 1,371
-15	Wire Bristles	390#		\$ 1,371
-16	Poly/Wire Bristles	319#		\$ 1,371
<u>YOU MUST CHOOSE ONE HYDRAULIC DRIVE MOTOR</u>				
-23	18 cu. in Hydraulic Motor - 18 GPM and below - 3500 psi	included		\$ 1,064
-24	23 cu. in. Hydraulic Motor - 19 GPM and above - 3500 psi	included		\$ 1,064
<u>YOU MAY CHOOSE ONE OF THE FOLLOWING FRONT DEFLECTORS</u>				
-31	Metal Shroud Extension w/Rubber Dust Deflector (323-021A)	59#		\$ 230
-32	Metal Shroud Extension Only (323-037A)	37#		\$ 130
<u>YOU MAY CHOOSE ONE OF THE FOLLOWING OPTIONS</u>				
-41	Marker Indicators (323-026A)	2#	2#	\$ 48
-51	Dust Suppression System w/25 Gallon Tank (323-030A)	37#	37#	\$ 493
-52	Hose and Spray Kit (323-043A)	20#	20#	\$ 118
<u>YOU MAY CHOOSE ONE OF THE FOLLOWING WIRING HARNESES</u>				
-60	14 Pin Wiring Harness, DEUTSCH HD30, 73" (323-094A) (For Kubota SVL/SSV only)	2#	2#	\$ 158
-61	14 Pin Wiring Harness, DEUTSCH HD30, 10' (323-095A) (For Kubota Tractors only)	2#	2#	\$ 158
-62	2 Pin Wiring Harness, DTP (2 Pin Kubota SVL) (323-096A)	2#	2#	\$ 204
-63	Switch and Wiring Harness (323-097A)	2#	2#	\$ 149
-64	Switch and Wiring Harness, Tractor Mount (323-098A)	2#	2#	\$ 215

AP-HB Series Hopper Brooms

[RETURN TO INDEX](#)

12-25 GPM

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s



1/2" Flat Faced Couplers Included
 Overall Height: 33" Approx.
 Brush Diameter: 26"
 Brush Rotor Shaft: Quick Change Broom Core with
 No Hydraulic Breakage in Changeover
 Hex Drive System: Replaceable
 Brush Bristle: 100% Poly or 100% Metallic or 50/50
 Hood: Sheet Metal
 Brush Speed Range: 100 - 230 RPM
 Hydraulic Hoses
 Hydraulic Couplers
 Optional Dust Suppression System

Hydraulic GPM Range: 12-25 GPM
 Rated Flow Standard Motor: 25 GPM @ 230 RPM
 Minimum Hydraulic Flow Req.: 12 GPM @2000 PSI
 Hitch: Skid Steer
 Sweeping Width: 74", 84"
 Bucket Shell: 3/16"
 Bolt-on Cutting Edge Standard: 5/8"x8"

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-HB74	74" HOPPER BROOM	1028#	1791#	\$ 4,979
	<u>YOU MUST CHOOSE A BROOM ASSEMBLY</u>			
-14	Poly Bristles	222#		\$ 918
-15	Wire Bristles	222#		\$ 950
-16	Poly/Wire Bristles	222#		\$ 934
	<u>YOU MAY CHOOSE A GUTTER BROOM ASSEMBLY</u>			
-19	Gutter Broom (323-138A)	101#		\$ 1,402
	<u>YOU MAY CHOOSE A DUST SUPPRESSION FEATURE</u>			
-51	HB74 Dust Suppression Kit (323-158A)	194#		\$ 798
-52	HB74 Dust Suppression Kit w/Gutter Broom Dust Supression (323-160A)	197#		\$ 844
AP-HB84	84" HOPPER BROOM	1116#	1880#	\$ 5,225
	<u>YOU MUST CHOOSE A BROOM ASSEMBLY</u>			
-14	Poly Bristles	251#		\$ 1,186
-15	Wire Bristles	251#		\$ 1,228
-16	Poly/Wire Bristles	251#		\$
	<u>YOU MAY CHOOSE A GUTTER BROOM ASSEMBLY</u>			
-19	Gutter Broom (323-138A)	101#		\$ 1,402
	<u>YOU MAY CHOOSE A DUST SUPPRESSION FEATURE</u>			
-51	HB84 Dust Suppression Kit (323-159A)	206#		\$ 861
-52	HB84 Dust Suppression Kit w/Gutter Broom Dust Supression (323-164A)	210#		\$ 907

AP-LB60 Loader Boom

RETURN TO INDEX



AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s

- 6" x 6" Tube Construction
- 6,000 lbs. Lift Capacity
- Flat Front
- Two 1" Lifting Lugs
- Stabilizer Chain Connections / Side Plates
- 45" W x 68" H
- Reinforced Mast
- Black Only

Attachments

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-LB60-92	60 SERIES LOADER BOOM 2-Pak	384#	494#	\$ 1,307
To Order Single Unit, Replace -92 with -99				\$ 95

AP-SA35 Series Planetary Skid Auger

[RETURN TO INDEX](#)

15-25 gpm

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s

Skid Steer Mounting Plate
Hydraulically Driven Planetary Gearbox
Hydraulically Reversible
Output Shaft: 2" Hex or 2⁹/₁₆" OD Round
Auger Teeth: Forged, Individually Replaceable
40 Degree Angle Installed on Flat Side
50 Degree Angle Installed on Angled Side
9" - 4 teeth, 12" - 4, 15" - 5, 18" - 6,
24" - 8, 30" - 10, 36" - 12
Tree Augers: 24" - 9, 30" - 11, 36" - 13


Auger Pipe: 2¹/₂" ID
Auger Flighting Thickness: 1/4"
Auger Length: 48"
Pilot: Cast Steel, 3 Drill Points
Includes 8' Hose & 1/2" Flat Face Couplers

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-SA35-01	35 SERIES HYDRAULIC SKID AUGER 2 ⁹ / ₁₆ " Round Output Shaft 15-25 GPM Hydraulic Motor	375#	449#	\$ 2,674
ADD OPTION NUMBER	FOR 2⁹/₁₆" ROUND OUTPUT SHAFTS			
-10	9" Double Flight Auger (317-096A)	70#	70#	\$ 486
-13	12" Double Flight Auger (317-099A)	98#	98#	\$ 552
-16	15" Double Flight Auger (317-102A)	119#	119#	\$ 707
-19	18" Double Flight Auger (317-105A)	131#	131#	\$ 778
-25	24" Double Flight Auger (317-108A)	214#	214#	\$ 911
-27	24" Tree Auger (317-111A)	162#	162#	\$ 830
-31	30" Double Flight Auger (317-114A)	285#	285#	\$ 1,337
-33	30" Tree Auger (317-117A)	236#	236#	\$ 1,249
-37	36" Double Flight Auger (317-120A)	380#	380#	\$ 1,602
-39	36" Tree Auger (317-123A)	305#	305#	\$ 1,517
-76	6" Rock Auger (317-281A)	60#	60#	\$ 979
-77	9" Hub Rock Auger (317-268A)	95#	95#	\$ 1,221
-78	12" Hub Rock Auger (317-269A)	116#	116#	\$ 1,507
-79	15" Hub Rock Auger (317-270A)	149#	149#	\$ 1,793
-80	18" Hub Rock Auger (317-271A)	205#	205#	\$ 2,087
-81	24" Hub Rock Auger (317-272A)	256#	256#	\$ 2,623
-87	2" Puff Auger (317-319A)	32#	32#	\$ 466
AP-SA35-02	35 SERIES HYDRAULIC POST HOLE DIGGER 2" Hex Output Shaft 15-25 GPM Hydraulic Motor	375#	449#	\$ 2,674
ADD OPTION NUMBER	FOR 2" HEX OUTPUT SHAFTS			
-06	6" Double Flight Auger (317-273A)	60#	60#	\$ 464
-09	9" Double Flight Auger (317-095A)	70#	70#	\$ 486
-12	12" Double Flight Auger (317-098A)	98#	98#	\$ 552
-15	15" Double Flight Auger (317-101A)	119#	119#	\$ 708
-18	18" Double Flight Auger (317-104A)	131#	131#	\$ 778
-24	24" Double Flight Auger (317-107A)	214#	214#	\$ 911
-26	24" Tree Auger (317-110A)	162#	162#	\$ 831
-30	30" Double Flight Auger (317-113A)	254#	254#	\$ 1,337
-32	30" Tree Auger (317-116A)	236#	236#	\$ 1,249
-36	36" Double Flight Auger (317-119A)	380#	380#	\$ 1,603
-38	36" Tree Auger (317-122A)	305#	305#	\$ 1,517
-70	6" Rock Auger (317-280A)	60#	60#	\$ 979
-71	9" Hex Rock Auger (317-263A)	95#	95#	\$ 1,222
-72	12" Hex Rock Auger (317-264A)	116#	116#	\$ 1,508
-73	15" Hex Rock Auger (317-265A)	149#	149#	\$ 1,793
-74	18" Hex Rock Auger (317-266A)	205#	205#	\$ 2,087
-75	24" Hex Rock Auger (317-267A)	256#	256#	\$ 2,623
-86	2" Puff Auger (317-318A)	32#	32#	\$ 465

AP-SGC20 Series Claw Grapples

[RETURN TO INDEX](#)

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s

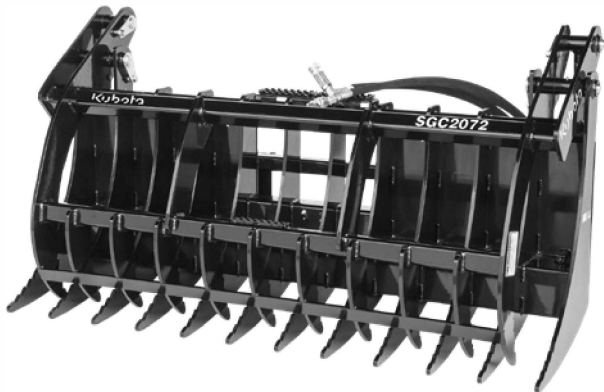

Closed Height: 39"
Number of Bottom Teeth: 12, 14
Number of Top Teeth: 11, 13
Spacing of Teeth: 6"
Tooth Thickness: 1/2"
Working Length of Teeth: 15"
Hydraulic Cylinder: 2 Qty, 3" x 10" x 1 1/4" Rod
Max. Jaw Opening: 50"
Tine Material: High Tensile AR400

*Hoses and fittings are options.




MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-SGC2072	20 SERIES CLAW GRAPPLE - 72" Width	896#	981#	\$ 4,771
AP-SGC2084	20 SERIES CLAW GRAPPLE - 84" Width	1000#	1,086#	\$ 5,424
ADD				
<u>OPTION NO</u>				
-11	Hoses & Flat Face Fitting Bundle 76" (380-063A)	9#	9#	\$ 238

NOTE: If attaching to a Kubota skid steer, route hydraulic hoses through Kubota's SVL or SSV Hose Stay. Purchase SVL Hose Stay #S6689 or SSV Hose Stay #77700-07225. Refer to the Operator's Manual for more instructions.

AP-SGR15 Series Rock Grapples

RETURN TO INDEX

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s

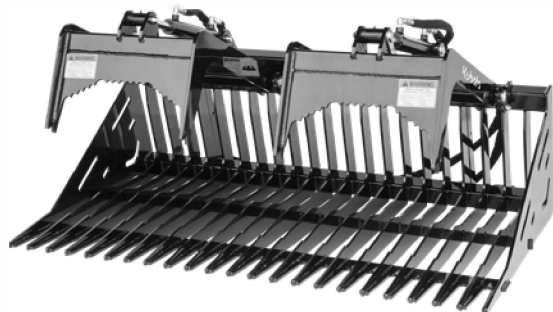

Closed Height: 30³/₄"
Number of Bottom Teeth: 23, 25
Spacing of Teeth: 3"
Tooth Thickness: ³/₈"
Working Length of Teeth: 38"
Hydraulic Cylinder: 2" x 8" x 1¹/₄" Rod
Max. Jaw Opening: 37"
Tine Material: High Strength Grade 80 Material

*Hoses and fittings are options.

Grapples

MODEL NUMBER	DESCRIPTION		APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-SGR1566-01	15 SERIES ROCK GRAPPLE - 66" Width		1000#	1014#	\$ 4,009
AP-SGR1572-01	15 SERIES ROCK GRAPPLE - 72" Width		1049#	1065#	\$ 4,154
AP-SGR1578-01	15 SERIES ROCK GRAPPLE - 78" Width		1083#	1099#	\$ 4,299
ADD					
OPTION NO.					
-11	Hoses & Flat Face Fitting Bundle 95"	(380-061A)	20#	20#	\$ 238
-21	Hydraulic Cylinder Shields - 2 each	(380-023A)	34#	34#	\$ 187

NOTE: If attaching to a Kubota skid steer, route hydraulic hoses through Kubota's SVL or SSV Hose Stay. Purchase SVL Hose Stay #S6689 or SSV Hose Stay #77700-07225. Refer to the Operator's Manual for more instructions.

AP-RG30 Series Root Grapples

[RETURN TO INDEX](#)

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s



1/2" Flat Faced Couplers Included
Gusseted 1/2" Frame Tines
3/4" Grapple Tines
Greaseable Pivot Points
10" Wide Tine Spacing
Steel Hydraulic Lines
2 1/2" x 8" x 1 1/4" Cylinders
Opening: 39 5/8"
Depth: 31"
Hydraulic Cylinder Shield Kit is now standard

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-RG3068-21	30 SERIES ROOT GRAPPLE - 68" Width	951#	1,042#	\$ 3,843
AP-RG3074-21	30 SERIES ROOT GRAPPLE - 74" Width	967#	1,058#	\$ 4,252
AP-RG3080-21	30 SERIES ROOT GRAPPLE - 80" Width	1,064#	1,155#	\$ 4,708
ADD OPTION NO.				
-31	Cylinder Rod Shield Kit (380-278A)	37#	37#	\$ 179

NOTE: If attaching to a Kubota skid steer, route hydraulic hoses through Kubota's SVL or SSV Hose Stay. Purchase SVL Hose Stay #S6689 or SSV Hose Stay #77700-07225. Refer to the Operator's Manual for more instructions.

AP-PFL45 & AP-PFL55 Series Pallet Forks

RETURN TO INDEX

45 Series: 4,500 lbs. Carrying Capacity
55 Series: 5,500 lbs. Carrying Capacity @ 24"

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s



45 SERIES:

Fork Dimensions: 48"L x 1½"D x 4"W
Fork Position Lock: Spring Loaded Toggle
Frame Size: 46"W x 38½"H
Fork Size: 1½" x 4" ITA Class II
Adjustable Fork Width: 8"-44"
Skid Resistant Step

55 SERIES:

Fork Dimensions:
PFL5548: 48"L x 1¾"D x 4" W
PFL5560: 60"L x 1¾"D x 4" W
Fork Position Lock: Spring Loaded Toggle
Frame Size: 46"W x 37"H
Fork Size: 1¾" x 4" ITA Class II
Adjustable Fork Width: 8"-44"
Skid Resistant Step

Attachments

MODEL NUMBER	DESCRIPTION	APPROX. WEIGHT	SHIPPING WEIGHT	PRICE
AP-PFL4548-93	45 SERIES PALLET FORKS - 48" Forks 4,500 lbs Carrying Capacity	394#	442#	\$ 1,148
AP-PFL5548-93	5,500 lbs Carrying Capacity, Skid/Loader Plate	426#	448#	\$ 1,204
AP-PFL5560-93	5,500 lbs Carrying Capacity, Skid/Loader Plate	473#	595#	\$ 1,539

AP-SC25 Series Skid Cutters

[RETURN TO INDEX](#)

Various Flow Requirements

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s

Skid Cutters



SKID STEER MUST BE EQUIPPED WITH A CASE DRAIN SYSTEM.

Cutting Height: 1.5" to 18" infinitely variable
 Cutting Width: 60" or 72"
 Overall Width: 60: 65½" 72: 78"
 Overall Length: 60: 73" 72: 91"
 Cutting Capacity: 2" Diameter
 Blade Rotation: Clockwise
 Blades & Blade Carrier: ½"x 4" Updraft,
 Heavy Duty Round Pan Stump Jumper

Hitch: Skid Steer
 Adjustable to Center or 8½" Right Offset
 Deck: 10 Gauge Steel
 Side Skirt Construction: 1/4" Steel
 Front Deck Protection: Single Row Chain Guard, Standard Eq.
 Rear Deck Protection: Double Row Chain Guard, Standard Eq.
 Deck Lift Height Protection: Safety Chain Limiter
 Deck Wear Protection: Optional Four Corner Mounted
 Skid Shoes
 Operator Protection: Optional Protective Door Shield
 Cutting Height Gauging: Optional Pivoting & Adjustable
 Front Mounted Gauge Wheel w/Laminated Tire
 Maximum Operating Pressure: 3500 psi
 Low Volume Drive Motors: For hyd. systems with
 11-17 GPM flow at 1500-3500 PSI;
 Medium Volume Drive Motors: For hyd. systems with
 18-23 GPM flow at 1500-3500 PSI;
 High Volume Drive Motors: For hyd. systems with
 24-30 GPM flow at 1500-3500 PSI;
 60" option:
 Low Volume Motor Blade Tip Speed: 17,939 FPM at 17 GPM
 Med. Volume Motor Blade Tip Speed: 19,181 FPM at 23 GPM
 High Volume Motor Blade Tip Speed: 19,390 FPM at 30 GPM
 72" option:
 Low Volume Motor Blade Tip Speed: 18,225 FPM at 17 GPM
 Med. Volume Motor Blade Tip Speed: 19,487 FPM at 23 GPM
 High Volume Motor Blade Tip Speed: 19,699 FPM at 30 GPM
 Hydraulic Hose Length: 80" Standard

*Polycarbonate door recommended with this attachment.

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-SC2560	SKID CUTTER - 60" Width Single Front Chain Guard Double Rear Chain Guard	948#	984#	\$ 3,968
AP-SC2572	SKID CUTTER - 72" Width Single Front Chain Guard Double Rear Chain Guard	1188#	1236#	\$ 4,457
	<u>You May Choose a Gauge Wheel</u>			
-01	Single Gauge Wheel - Front Mounted (326-858A)	114#	154#	\$ 469
	<u>You Must Choose a Hydraulic Motor Assembly</u>			
-14	Hydraulic Motor: 11-17 GPM @ 3500 PSI			\$ 829
-15	Hydraulic Motor: 18-23 GPM @ 3500 PSI			\$ 829
-16	Hydraulic Motor: 24-30 GPM @ 3500 PSI			\$ 829
	<u>You May Choose a Pressure Gauge</u>			
-20	Motor Pressure Gauge (326-833A)	2#	2#	\$ 50
	<u>You May Choose a Skid Shoe Option</u>			
-41	Skid Shoes - Four Corners - 1/4" x 2" (326-827A)	15#	15#	\$ 80
-42	Heavy-Duty Skid Shoes - Four Corners - 3/8" x 3" (326-828A)	25#	25#	\$ 101

AP-SC40 Series Skid Cutters

[RETURN TO INDEX](#)

Various Flow Requirements

AVAILABLE FOR: SSV65 / SVL65-2 / SSV75 / SVL75-2 / SVL95-2s



Width: 60-71"; 72-83"
 Length: 60-78¹/₂"; 72-91¹/₂"
 4" Cutting Capacity Deck: 1/4"
 15-43 GPM Range - Depending on Option
 Standard Large Skid Shoes
 Tapered, Heavy-Duty
 Optional 4" Pressure Gauge
 Optional Case Drain
 Deck: 1/4"
 Side Skirts: 1/4"
 Chain Guards Standard
 Optional Protective Door
 Maximum Operating Pressure: 3500 PSI

*Polycarbonate door recommended with this attachment.


MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-SC4060	SKID CUTTER - 60" Width Single Front Chain Guard Single Rear Chain Guard <u>You Must Choose a Hydraulic Motor Assembly</u>	1,424#	1,452#	\$ 4,813
-13	Hydraulic Motor: 15-25 GPM @ 3500 PSI	INC	INC	\$ 1,456
-15	Hydraulic Motor: 26-43 GPM @ 3500 PSI <u>You May Choose any of these Options</u>	INC	INC	\$ 1,456
-20	Case Drain Bundle (326-863A)	5#	5#	\$ 100
-30	Front Roller (326-646A)	44#	44#	\$ 509
-41	Pressure Gauge Bundle ECOR (326-867A) <u>You Must Pick a Protective Door Option</u>	4#	4#	\$ 308
-86	Operator Protective Door Assembly	20#	20#	\$ 395
-87	No Operator Protective Door Assembly			\$ 0
AP-SC4072	SKID CUTTER - 72" Width Single Front Chain Guard Single Rear Chain Guard <u>You Must Choose a Hydraulic Motor Assembly</u>	1,822#	1,850#	\$ 5,682
-14	Hydraulic Motor: 15-26 GPM @ 3500 PSI	INC	INC	\$ 1,433
-15	Hydraulic Motor: 27-43 GPM @ 3500 PSI <u>You May Choose any of these Options</u>	INC	INC	\$ 1,434
-20	Case Drain Bundle (326-864A)	5#	5#	\$ 100
-30	Front Roller (326-646A)	44#	44#	\$ 508
-41	Pressure Gauge Bundle ECOR (326-867A) <u>You Must Pick a Protective Door Option</u>	4#	4#	\$ 308
-86	Operator Protective Door Assembly	40#	40#	\$ 395
-87	No Operator Protective Door Assembly			\$ 0
ACCESSORY				
326-960A	Large Flat Face Couplers w/Adaptors		3#	\$ 217

AP-SC60 Series Skid Cutters

RETURN TO INDEX

18-30 GPM

AVAILABLE FOR: SSV75, SVL75-2, SVL95-2s

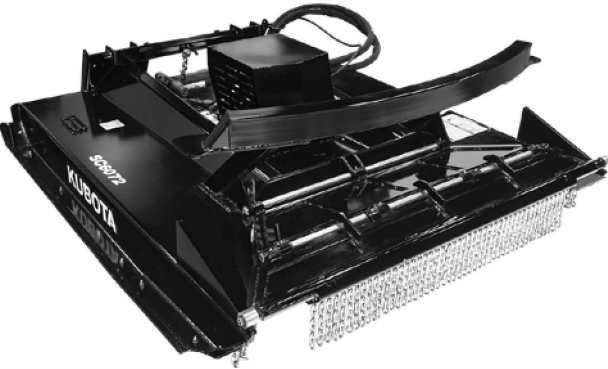

Width: 81"
Length: 91"
6" Cutting Capacity
18-30 GPM
9.9 Cu. In. Motor
4 Reversible Heat-Treated Blades
Blades 1/2" Plate
Steel Blade Carrier
18 Carbide Points
Standard Large Skid Shoes
Tapered, Heavy-Duty
Optional 4" Pressure Gauge
Case Drain
Deck: 1/4"
Side Skirts: 1/4"
Chain Guards Standard
Patent-Pending Bi-fold Door
Maximum Operating Pressure: 3500 PSI

Skid Cutters

*Polycarbonate door recommended with this attachment.

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-SC6072	SKID CUTTER - 72" Width Front and Rear Chains Bi-Fold Door Pusher Bar	2,110#	#2,110	\$ 11,729
	You May Choose			
-41	Pressure Gauge Bundle	4#	4#	\$ 185
	You Must Chose a Protective Door Option			
-86	Protective Door (for skid steers not equipped with a cab door)	40#	40#	\$ 395
-87	No Protective Door			

AP-SC70 Series Skid Cutters

[RETURN TO INDEX](#)

Various Flow Requirements

AVAILABLE FOR: SVL95-2s



Width: 81"
 Length: 91"
 7" Cutting Capacity
 28-43 GPM
 Maximum Flow Rate 43 GPM
 11.95 Cu. In. Motor
 4 Reversible Heat-Treated Blades
 Blades 3/4" Plate
 Laminated Steel Blade Carrier
 18 Carbide Points
 Standard Large Skid Shoes
 Tapered, Heavy-Duty
 Optional 4" Pressure Gauge
 Optional Case Drain
 Deck: 1/4"
 Side Skirts: 1/4"
 Chain Guards Standard
 Unique Bi-fold Door
 Maximum Operating Pressure: 3500 PSI

*Polycarbonate door recommended with this attachment.

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-SC7072	SKID CUTTER - 72" Width Front and Rear Chains Bi-Fold Door Pusher Bar <u>You May Choose any of these Options</u>	2,482#	#2,482	\$ 13,723
-20	Case Drain Bundle (326-925A)	5#	5#	\$ 55
-41	Pressure Gauge Bundle (326-928A)	4#	4#	\$ 199
ACCESSORY				
326-024A	Operator Protective Door Assembly	40#	40#	\$ 395


AP-SRT Skid Tillers

RETURN TO INDEX

14-42 GPM

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s

Attachments

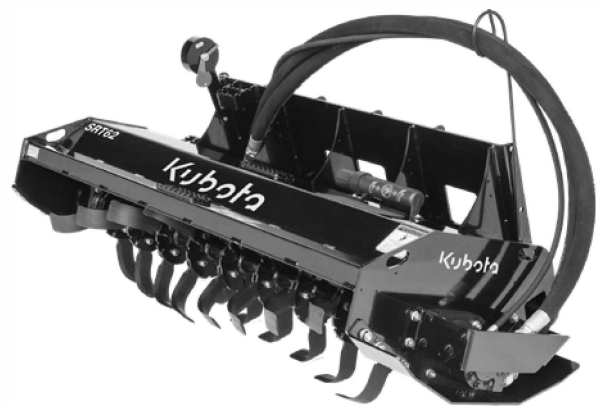

Hitch: Skid Steer
Color: Black
Tilling Depth: 5½", 4", and 2"
Rotor Diameter: 18.3"
Rotor Speed:
SRT62 LOW flow motor 143-245 RPM
SRT62 HIGH flow motor 133-244 RPM
SRT76 HIGH flow motor 133-244 RPM
Recommended Hydraulic Pressure
SRT62 LOW flow motor
14-23 gpm: minimum 2800 psi / max of 4500 psi
SRT62 HIGH flow motor
23-42 gpm: minimum 2000 psi / max of 4500 psi
SRT76 HIGH flow motor
16-23 gpm*: minimum 2600 psi / max of 4500 psi
92-133 Rotor RPM
23-42 gpm: minimum 2300 psi / max of 4500 psi
133-244 Rotor RPM
Tines: Forged, Hardened, Bi-Directional, "C"-Shape,
4 per Flange
Shanks: ¾" x 2½" x 16" Steel; Standard
62: 5 Shanks with retaining clips, Standard
76: 6 Shanks with retaining clips, Standard
Patent Pending Level Indicator


MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-SRT62-10-50	62" Skid Tiller Low Flow Motor, 5 Shanks	785#	851#	\$ 5,660
AP-SRT62-11-50	62" Skid Tiller High Flow Motor, 5 Shanks	785#	851#	\$ 5,837
AP-SRT76-50	76" Skid Tiller High Flow Motor, 6 Shanks	880#	921#	\$ 6,743
Add Option No.	Coupler Option			
-20	Small Flat Faced Couplers		2#	\$ 133
-21	Large Flat Face Couplers		4#	\$ 217

*AP-SRT76 High flow motors can be used on skid steers with 16-23 gpm with minimum working pressure of 2600 psi but rotor speed (RPM) will be reduced which could affect tilling performance.

AP-SSG25 Series Stump Grinder

[RETURN TO INDEX](#)

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s

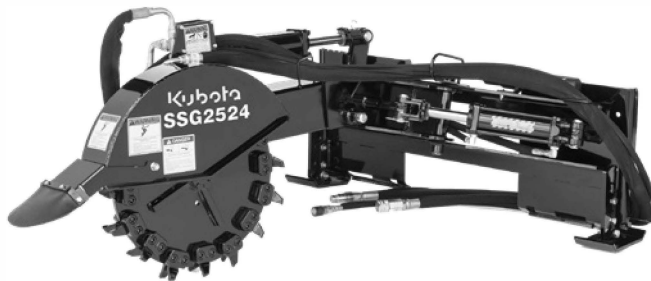

Overall Mounting Width: 48"
Overall Length (w/o Shielding): 60"
Drive System: Hydraulic Motor w/Electric over Hydraulics
Hydraulic Requirements: 17-32 gpm
Angle & Lift Cylinders: 3" x 6" Stroke
w/1 1/4" Rod Diameter
Hydraulic Lines & Hoses: 3/4"
Cutting Wheel: 1/2" Thick x 24" Diameter
w/Carbide Teeth
Number of Carbide Teeth: 32
Cutting Wheel Speed: 640 rpm @ 18 gpm
Cutting Arc: 55 Degrees
Max Cutting Depth: 8"
Greaseable Hinge Points: Yes
Main Frame: 6" x 6" x 1/4" Tube

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-SSG2524	25 SERIES STUMP GRINDER 24" Diameter Cutting Wheel	455#	565#	\$ 6,609
ADD OPTION				
NUMBER				
-20	Flat-Faced Hydraulic Quick Couplers (326-627A)	1#	1#	\$ 133
-31	Control Harness - Battery Connection with Switch (370-134A)	5#	5#	\$ 284
-32	14 Pin Wiring Harness (Kubota SVL & Others) (370-336A)	3#	3#	\$ 164
-35	2 Pin Wiring Harness (Kubota SVL w/0 14 Pin Connector) (370-434A)	2#	2#	\$ 335
-90	SSL/SVL Case Drain Coupler	8#	8#	\$ 52

NOTE: If attaching to a Kubota skid steer, route hydraulic hoses through Kubota's SVL or SSV Hose Stay. Purchase SVL Hose Stay #S6689 or SSV Hose Stay #77700-07225. Refer to the Operator's Manual for more instructions.

AP-STP15 Series Tree/Post Puller

[RETURN TO INDEX](#)

AVAILABLE FOR: SSV65



Hitch: Skid Steer
Cylinder: 2" x 8" x 1" Welded
Stout Square Tube Frame
Pincher: 16" x 2 3/4" x 5/8"
Pivot Pin: 2 1/2" Solid, Greasable
Mouth Opening: 10"
Cylinder Guard: 3/16", Included
Small Flat Faced Couplers Included

Attachments

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-STP15	15 SERIES TREE/POST PULLER	195#	245#	\$ 1,624

NOTE: If attaching to a Kubota skid steer, route hydraulic hoses through Kubota's SVL or SSV Hose Stay. Purchase SVL Hose Stay #S6689 or SSV Hose Stay #77700-07225. Refer to the Operator's Manual for more instructions.

AP-STP25 Series Tree/Post Puller

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s



Hitch: Skid Steer
Cylinder: 2" x 8" x 1" Welded
Stout Square Tube Frame
Pincher: 16" x 2 3/4" x 5/8"
Pivot Pin: 1 1/4" x 17" Solid, Greasable
Mouth Opening: 10"
Cylinder Guard: 3/16", Included
Small Flat Faced Couplers Included

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-STP25	25 SERIES TREE/POST PULLER	495#	516#	\$ 2,033
ADD OPTION NO.				
-10	Push Bar Assembly	101#	101#	\$ 380

NOTE: If attaching to a Kubota skid steer, route hydraulic hoses through Kubota's SVL or SSV Hose Stay. Purchase SVL Hose Stay #S6689 or SSV Hose Stay #77700-07225. Refer to the Operator's Manual for more instructions.

AP-TR Series Trencher

[RETURN TO INDEX](#)

AVAILABLE FOR: SSV65 / SSV75 / SVL75-2 / SVL95-2s



58" Frame Width
48", 60" Depths
15-24 gpm, 25-40 gpm Motor Options
FF Couplers on 15-24GPM
Large FF Couplers on 24-40GPM
3600 psi Operating Pressure
Manual or Hydraulic Sideshift
6", 8", 10" Width Chain Options
2-Pitch, 4-Pitch, and Combo Chain Options
Patented Depth Gauge
Standard Spoil Auger, 15½" Diameter
Grease Cylinder Tensioning
Crumbler Shoe to Clear Trench

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
AP-TR48-10	48" TRENCHER - 15-24 GPM MOTOR	1276#	1374#	\$ 6,762
AP-TR48-11	48" TRENCHER - 24-40 GPM MOTOR	1283#	1381#	\$ 7,201
AP-TR60-10	60" TRENCHER - 15-24 GPM MOTOR	1304#	1402#	\$ 6,762
AP-TR60-11	60" TRENCHER - 24-40 GPM MOTOR	1311#	1409#	\$ 7,201

Trencher Options and Chain Selection Guide on following pages.

ADD OPTION NUMBER		APPROX. MACHINE_ WEIGHT	SHIPPING WEIGHT	LIST PRICE
	<u>You MUST Choose a Chain (48" Only)</u>			
-30	2 Pitch Chain, Standard Cup, 6" (350-072A)			\$ 1,152
-31	2 Pitch Chain, Standard Cup, 8" (350-170A)			\$ 1,405
-32	2 Pitch Chain, Standard Cup, 10" (350-171A)			\$ 1,569
-34	4 Pitch Chain, Standard Cup, 6" (350-173A)			\$ 905
-35	4 Pitch Chain, Standard Cup, 8" (350-174A)			\$ 1,009
-36	4 Pitch Chain, Standard Cup, 10" (350-175A)			\$ 1,306
-38	Scorpion and Cup Chain, 6" (350-177A)			\$ 2,025
-39	Scorpion and Cup Chain, 8" (350-178A)			\$ 2,294
-40	Scorpion and Cup Chain, 10" (350-179A)			\$ 2,612
-42	Alligator and Cup Chain, 6" (350-181A)			\$ 2,026
-43	Alligator and Cup Chain, 8" (350-182A)			\$ 2,299
-44	Alligator and Cup Chain, 10" (350-183A)			\$ 2,964
	<u>You MUST Choose a Chain (60" Only)</u>			
-30	2 Pitch Chain, Standard Cup, 6" (350-129A)			\$ 1,322
-31	2 Pitch Chain, Standard Cup, 8" (350-185A)			\$ 1,602
-32	2 Pitch Chain, Standard Cup, 10" (350-186A)			\$ 1,866
-34	4 Pitch Chain, Standard Cup, 6" (350-188A)			\$ 1,037
-35	4 Pitch Chain, Standard Cup, 8" (350-189A)			\$ 1,157
-36	4 Pitch Chain, Standard Cup, 10" (350-191A)			\$ 1,383
-38	Scorpion and Cup Chain, 6" (350-193A)			\$ 2,310
-39	Scorpion and Cup Chain, 8" (350-196A)			\$ 2,623
-40	Scorpion and Cup Chain, 10" (350-197A)			\$ 2,854
-42	Alligator and Cup Chain, 6" (350-199A)			\$ 2,304
-43	Alligator and Cup Chain, 8" (350-201A)			\$ 2,629
-44	Alligator and Cup Chain, 10" (350-202A)			\$ 3,687
	<u>You MUST Choose a Sideshift Option</u>			
-60	Hydraulic Side Shift	28#	28#	\$ 740
-61	Manual Side Shift	7#	7#	\$ 82
	<u>You MUST Choose a Crumber Shoe</u>			
-70	6" Crumber Shoe	7#	7#	\$ 21
-71	8" Crumber Shoe	9#	9#	\$ 23
-72	10" Crumber Shoe	12#	12#	\$ 26

TRENCHER CHAIN SELECTION GUIDE

2 PITCH CHAIN

Standard Cup Tooth Every Station
Light to moderately compacted, sandy soils




4 PITCH CHAIN

Standard Cup Tooth Every Other Station
Wet, sticky conditions




ALLIGATOR & CUP TEETH

Combination 50/50
Highly compacted soils, clay, shale or frozen ground



SCORPION & CUP TEETH

Combination 50/50
Compacted or rocky soil - Not recommended for use in normal conditions



CHAIN WIDTHS


6" Wide



8" Wide



10" Wide



CHAIN AND CUTTER RECOMMENDATIONS FOR VARIOUS DIGGING CONDITIONS

CHAIN SYSTEM	ROCKY SOIL	HARD SOIL	MEDUM SOIL	SOFT SOIL	SANDY
4 pitch cup			***	***	**
2 pitch cup		**	***	***	***
Scorpion & cup	***	***	***	***	
Alligator & cup	***	***	***	**	