

SPECIFICATION SHEET

GENERAL BYPASS PUMP PACKAGE INFORMATION

TPC Model	Pump	Engine	Max. Solids	Fuel Tank	Suc. x Dis.
TPK6-FS	Cornell	Doosan	3"	100 gals	6" x 6"

Engine rating: Rated for 2200 rpm engine speed. (Corrected per SAE J1349)
 Intermittent - Applicable for a varying intermittent loads with no overload capability.
 Continuous - Continuous prime rating is applicable for supplying power to a varying load for an unlimited amount of running time, with 10% overload capacity available for 1 out of every 12 hours.

STANDARD PUMP PACKAGE DESCRIPTION

Tradewinds Power Corp (TPC) bypass 6" x 6" pump packages are designed for continuous operation in rugged environments requiring uninterrupted de-watering for extended periods. As standard a automatic priming centrifugal pump and diesel engine are close coupled together on a DOT trailer. The package designed to be easily transported to site making it the preferred pump for renters, municipalities, industrial users, and construction.

Key TPK6-FS Pump Package Features are:


- CORNELL model 6612TVA Redi-Primer[®] bypass pump
- Doosan diesel engine
- EPA and CARB certified for mobile applications
- DOT trailer for road and rough terrain mobility
- Heavy duty lifting bale
- 12v starter, charger and battery
- Auto start controller
- Open configuration with option for enclosure
- Spray bed liner that lasts longer than paint
- Torque spring axles for smoother equipment ride
- Hose box assembly with 250 PSI hoses
- All stainless steel hardware

Pump Features:

- 6" discharge x 6" suction with 125# cast iron flanges
- Cast iron casing
- 2-vane enclosed stainless steel impeller that handles 3" diameter solids
- Replaceable wear rings & Run Dry Seals
- Cornell's patented Cycloseal[®] design with run-Dry oil lubrication system
- Vacuum pump 50 SCFM maximum. Positive seating vacuum priming valve prevent water carry-over to the vacuum, pump or atmosphere
- Ball valve made out of brass to prevent corrosion
- Alarms for Low Oil Level for run dry seals

Optional Equipment Available for TPK6-FS Pump Package:

- Sound attenuated full enclosure fabricated from marine grade aluminum, and powder paint for durability
- Package can be easily upgraded to a pressure, level or flow transducer auto-start configuration

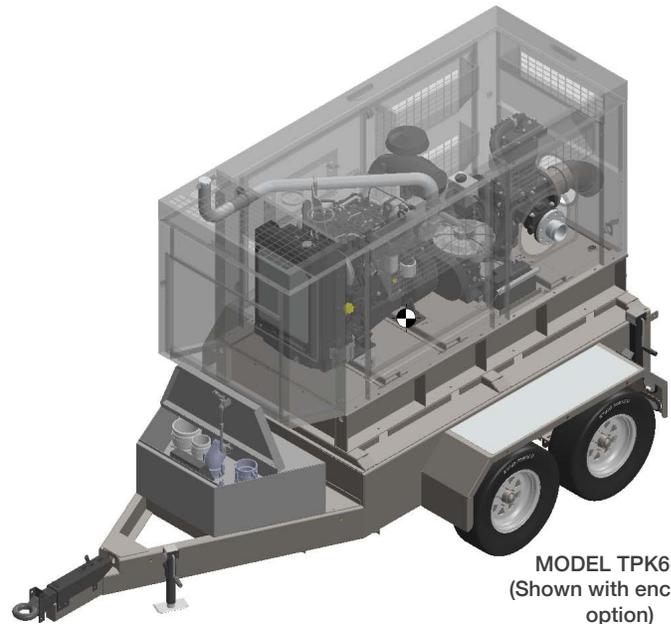

MODEL TPK6-FS
(Shown with enclosure option)

Optional Equipment. Continued:

- Options for Flow Meters and Level Transducers
- Hoses with Stainless Steel couplings

AUTOMATIC ENGINE CONTROLLER:

- Automatic engine controller with digital display of all functions
- Quick and easy to install
- Advanced, rugged, reliable microprocessor-based design
- Full engine monitoring and shut down protection
- Full autostart, manual start, and off controls
- 3.8" monochrome, transfective, white back light LCD



MPC20
ENGINE CONTROLLER

WARRANTY:

- Engine & Pump covered under the OEM manufacturer's warranty - consult Tradewinds Power Corp for details
- Complete package supplied with one-year limited warranty

The manufacture reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

TPK6-FS Performance Curve

Pump Specifications

Manufacturer	Cornell
Model #	6612TVA
Type	6" discharge x 6" suction
Priming	Self-prime
Casing material	Cast iron
Impeller	Enclosed 2-vane
Impeller material	Stainless steel
Ball valve material	Brass
Solid size managed	3"
Wear rings	Replaceable
Ball bearing life	Heavy duty 50,000 hours
Shaft sleeve material	Stainless steel
Vacuum Pump	50 SCFM maximum

Engine Specifications

Manufacturer	Doosan
Model	D34
Emissions	Tier 4 - Final & Stage IIIB
Crankshaft speed	1,800 rpm
Engine Type & Combustion	Diesel Direct Injection
Fuel Injection System	High Pressure Common Rail
Fuel Pressure	1800 bar
Aspiration	Turbo-Charged & Intercooled
Diesel fuel grade	EN590 : 2009 Diesel
Cylinder Arrangement	In-line 4
Displacement in ³ [liters]	208 [2.392]
Bore and stroke ins [mm]	3.85 X 4.45 [98 X 113]
Peak power hp [kW] @ 2400 rpm	130.0 [97.0]
Cooling	Water Cooled
Engine Control	Electronic Engine Management
Compression ratio	17.0:1


Standard Pump Package Arrangement

Coupling	Close coupled cam and groove
Arrangement	DOT trailer mounted
Fuel tank	100 gallon mounted in base
Starter and charging alternator	12V
Controller	MPC20
Exhaust	Mounted silencer
Hose coupling	Aluminum 250 psi
Site handling management	Lifting bale

Options Offered for Pump Package

Sound attenuated enclosure	Aluminum powder coated
Hose box	Mounted on bed
Hose coupling option	Stainless steel
Auto switch operation options	Pressure/level/flow transducer
Flow meters	To track water pumped
Level Transducers	To measure height of water

CORNELL 6 x 6 Pump Model 6612T Performance Curve

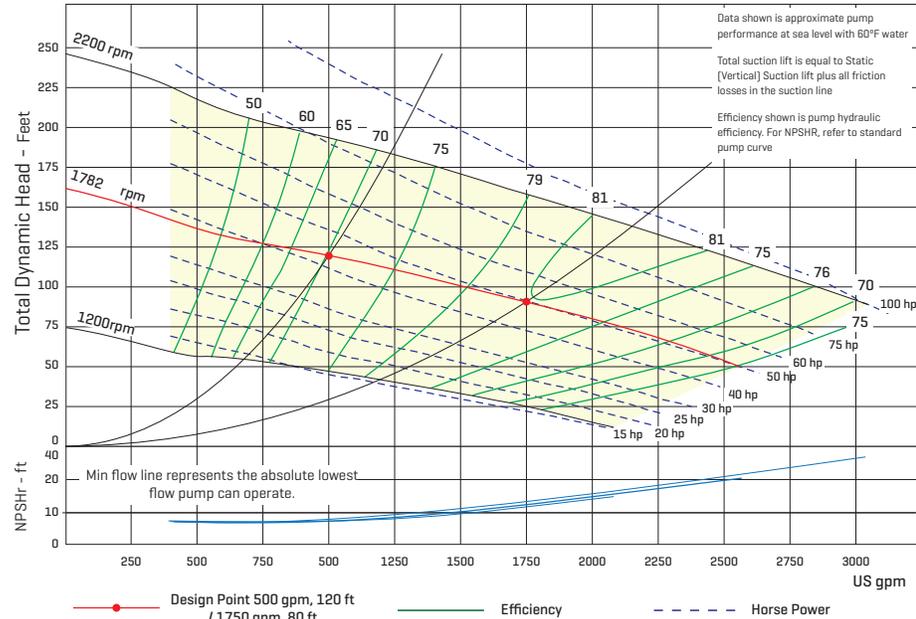

TPK6-FS Performance Table

Diesel Model: DOOSAN D34

Pump Model: Cornell 6612TVA

Pump Details

Encl. Solids Handling	Adjustable	Package Dimensions	
Design Point min/max	1750gpm 160ft/1000 gpm 125'	Inches and Pounds	
Static Head	0 ft	Height	96.08
Size	6612TVA	Length	194.30
Diameter (inches)	12"	Width	88.36
Speed	1782	Dry Weight	6027.5 lbs

TPK6-FS Dimensions

