


RC(M)5715 - 15' Heavy Duty Rotary Cutter

60-250 HP

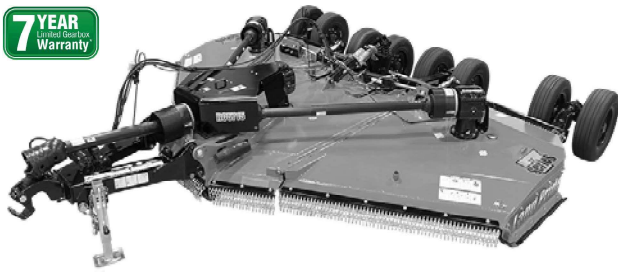

Working Width: 15'
Transport Width: 10'3" Normal, 7'3" w/Narrow Option
Overall Width: 16'
Overall Length: 16'3"
Hitch: Pull-Type, Self-Leveling Hitch & Clevis
Tongue Jack
Cutting Height*: 1-1/2" - 16"
Cutting Capacity: 5"
Deck Height: 12"
Deck Thickness: 10 Gauge Top, 3/16" Bottom
Side Skirt Thickness: 1/4", Removable/Replaceable
Gearbox Rating^: 250 HP Divider; 225 HP Center & Wings
Gearbox: 540 rpm or 1000 rpm
Gearbox Input Shaft: 1-3/4" 20 Spline
Gearbox Output Shaft: 3"

Input Driveline: Constant Velocity U-Joint Cat. 6,
Splined 540 or 1000 RPM
Connecting Driveline: Cat. 4 or 5 Slip-Clutch
Forged Diamond Blade Bar
Optional Stump-Jumper: 3/16", Round, Dish Shaped
Optional HD Blade Bar and Dishpans
Blades: 2 per Section, 1/2" x 4" Heat Treated
Free Swinging Alloy Steel with Uplift
Blade Bolt: Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap: 6"
Blade Speed:
540 rpm: Center & Wings: 16,400 fpm
1000 rpm: Center: 16,400; Wings: 16,000 fpm
6 or 8 Wheels with Suspension Options
Wheel Options: 6" x 21" Laminated Tires
6" x 26" Laminated Tires
29" x 7.75" x 15" Used Aircraft Tires
24" x 7.7-10 Used A/C Foam-Filled Tires
25.5" New, Pneumatic or Foam-Filled
Tapered Roller Bearings & Cast Iron 5-Bolt Hubs
with 1-3/4" Shaft
Wing Transport Locks
Wing Hydraulics: 3" x 12" Cylinder, Hoses & Fittings
Height Adjustments: 3-1/2" x 8" Cylinder, Hose, Fittings
& Flip-over Spacers
Skid Shoes: Wings & Center, Replaceable AR400 Beveled
Front and Rear Shielding: Single or Double Chain
Blade Rotation: L-CW, C-CCW, R-CCW
Lights Standard

Cutters

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	PRICE
RC5715-17-21-26-32 -40-60-65-75-92	15' HEAVY-DUTY ROTARY CUTTER - 540 rpm 6 24" used A/C FF, HD Single Suspension Center and Wing Axles, CV 540 Cat 5 , Cat 4 Wing, Chains, No Deck Rings, Single Acting Fold Cylinders, Performance Hitch, Heavy Duty Blade Bar and Dishpans	5,104#	\$ See Zone Pricing
RCM5715	15' HEAVY-DUTY ROTARY CUTTER - 1000 rpm	3,103#	\$ No Upcharge
-41	Double Chains - Front & Rear	312#	\$ 801
-24	Parallel Pivot Center Axle	443#	\$ 2,369
-29	Parallel Pivot Wing Axles (Must have 8-Tire Option)	360#	\$ 2,119
-34	540 CV Main, Cat 5 Wings	78#	\$ 2,210
-62	Deck Armor™ (Better than Deck Rings)	368#	\$ 699
-68	Independent Dual-acting Fold Cylinders (3") for Narrow Transport (4 hoses)	96#	\$ 809
-70	Constant Level Clevis Hitch	57#	\$ 314
-72	Bar-tite Hitch	69#	\$ 468
-73	Constant Level Pintle Hitch	71#	\$ 459




WARNING!

Rotary Cutters used in non-agricultural areas must be equipped with front & rear guards. The possibility of thrown objects can be hazardous to persons or property.

RC3712 - 12' Heavy Duty Smooth Top

50-160 HP

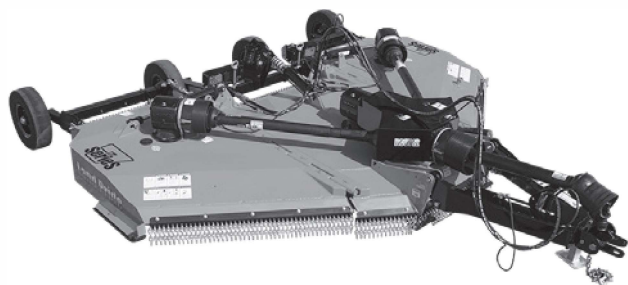

Working Width: 12'
Transport Width: 9'4"
Overall Width: 12'10"
Overall Length: 15'3"
Hitch: Pull-Type, Self-Leveling Hitch & Clevis
Hitch Weight: 1,370 lbs.
Tongue Jack
Cutting Height: 1½" - 14"*
Cutting Capacity: 3"
Deck Height: 11"
Deck Thickness: 10 Gauge

Side Skirt Thickness: 1/4"
Gearbox Rating^: 160 HP Divider; 130 HP Center & Wings
Gearbox: 540 rpm or 1000 rpm
Gearbox Input Shaft: 1¾" 20 Spline
Gearbox Output Shaft: 2"
Input Driveline: Constant Velocity U-Joint, Cat. 6
Connecting Driveline: Cat. 4
Stump-Jumper: 3/16", Round
Blades: 2 per Section, 1½" x 4" Heat Treated
Free Swinging Alloy Steel with Uplift
Blade Bolt: Keyed with Hardened Flatwasher
& Lock Nut
Blade Overlap: 6"
Blade Speed
540: Center: 15,514 fpm, Wings: 15,474 fpm
1000: Center: 15,700 fpm, Wings: 15,707 fpm
Wheels: 4 or 6
25.5" x 6.75" Aircraft Tires, Pneumatic or Foam Filled,
or 21" or 26" Laminated Tires
Tapered Roller Bearings & Cast Iron 5-Bolt Hubs
with 1¾" Shaft
Wing Transport Locks
Wing Hydraulics: 2½" x 12" Cylinder, Hoses & Fittings
Height Adjustments: 3" x 8"
Skid Shoes: Wings & Center, Replaceable
Front and Rear Single or Double Chain Shielding
Blade Rotation: L-CW, C-CCW, R-CCW
Lights Standard

SEE NEXT PAGE FOR PRICING.

*Varies by Tire Option

See pg. 31 for pricing and color options

See pg. 70 for available hitches

^Gearbox HP rating is based on in field use and performance

	WARNING!
Rotary Cutters used in non-agricultural areas must be equipped with front & rear guards. The possibility of thrown objects can be hazardous to persons or property.	

RC3712 - 12' Heavy Duty Smooth Top



Cutters

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	PRICE
RC3712	12' HEAVY DUTY ROTARY CUTTER - 540 rpm	3000#	3000#	\$ - 2,232
RCM3712	12' HEAVY DUTY ROTARY CUTTER - 1000 rpm	3000#	3000#	\$ - 2,232

OPTIONS

You Must Choose a Tire Package

-01	21" Laminate, 2 Center, Single Wings	280#	280#	\$ 531
-02	21" Laminate, 4 Center, Single Wings	420#	420#	\$ 957
-04	25.5" Aircraft, 2 Center, Single Wings	348#	348#	\$ 1,366
-05	25.5" Aircraft, 4 Center, Single Wings	522#	522#	\$ 2,190
-16	24" Foam-Filled Used Aircraft, 2 Center, Single Wings	488#	488#	\$ 1,543
-17	24" Foam-Filled Used Aircraft, 4 Center, Single Wings	732#	732#	\$ 2,494
-13	26" Laminate, 2 Center, Single Wings	347#	347#	\$ 1,097
-14	26" Laminate, 4 Center, Single Wings	520#	520#	\$ 1,786

You Must Choose a Driveline

-32	540 1-3/8", 6 Spline CV Main, Cat. 6; Wings Cat. 4	78#	78#	\$ 830
-37	540 1-3/8", 6 Spline CV Main with Over-running Clutch, Cat. 6; Wings Cat. 4	78#	78#	\$ 1018
-32	1000 1-3/8", 21 Spline CV Main, Cat. 6; Wings Cat. 4	78#	78#	\$ 830
-37	1000 1-3/8", 21 Spline CV Main with Over-running Clutch, Cat. 6; Wings Cat. 4	78#	78#	\$ 1018

You Must Choose a Chain Guard

-40	Single Chain - Front & Rear	102#	102#	\$ 489
-41	Double Chain - Front & Rear	156#	156#	\$ 699

You Must Choose a Hitch

-70	Fixed Clevis Hitch	39#	39#	\$ 208
-72	Bar-tite Hitch	69#	69#	\$ 468
-73	Pintle Hitch	43#	43#	\$ 273
-74	Ball Hitch (2-5/16")	28#	28#	\$ 193
-75	Performance Hitch - Self Leveling, Up and Down and Side to Side Swivel	62#	62#	\$ 354

*** (Option 75 is **NOT** compatible with Kubota L/Grand L Tractors) ***

ADD

OPTION NO. You May Choose a Color Option (No Option=Buckskin)

-81	Green
-82	Orange
-83	Red
-86	Yellow

RCF(M)36 Series - 10' Heavy Duty

Semi-Mount & Pull-Type: 50-130 HP • Lift-Type: 60-130 HP



Cutting Width: 10'
 Overall Width: 10' 6 1/2"
 Cutting Height: 2" - 12"
 Cutting Capacity: 3"
 Lift-Type, Semi-Mount: Cat. 2 and 3
 Quick Hitch Adaptable
 Pull-Type - Self-Leveling w/ Dual-Leveling Rods
 Tongue Jack on Pull-Type
 Deck Height: 13"
 Deck Thickness: 10 Gauge
 Side Skirt Thickness: 1/4"
 Gearbox Rating^: Outboard-210 HP; T-Box - 210 HP
 Gearbox: 540 rpm or 1,000 rpm
 Beveled Gears, Cast Iron Housing

Gearbox Input Shaft: 1 3/4" - 20 Spline
 Output Shaft Diameter: 2 3/8"
 Driveline: Cat. 4 Constant Velocity U-Joint
 or Equal Angle Shaft on Pull-Type
 Slip-Clutch Protection
 Rubber Flex Coupler to Outboard Boxes
 Blade Holder: 2 ea., 3/16" Stump Jumper
 Blades: 2 per Blade Holder; 1/2" x 4" Heat Treated
 Free Swinging Suction Blades
 Blade Tip Speed: 540 rpm - 17,150 fpm
 1000 rpm - 17,425 fpm
 Tailwheels: See selections below
 Tapered Roller Bearings & Cast Iron Hub
 Replaceable Skids
 Spring Shock Absorber on Pull-Type & Semi-Mount Axle

Cutters

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WT	SHIPPING WEIGHT	PRICE
RCF3610	36 SERIES - 10' ROTARY CUTTER - 540 rpm	1669#	1669#	\$ -6,220
RCFM3610	36 SERIES - 10' ROTARY CUTTER - 1000 rpm	1669#	1669#	\$ -6,220
ADD_				
OPTION NO.	Choose One Front Guard			
-01	Front Single Chain Guard (326-437A)	89#	89#	\$ 323
-02	Front Rubber Guard (326-524A)	39#	39#	\$ 258
-03	Front Double Chain Guard (326-440A)	125#	125#	\$ 430
	Choose One For 3-Point or Semi-Mount			
-11	3-Point w/15" Laminated Tires and Driveline	497#	497#	\$ 2,299
-13	Semi-Mount Hitch w/21" Laminated Tires and Driveline	539#	539#	\$ 2,890
-15	3-Point w/21" Laminated Tires and Driveline	601#	601#	\$ 3,125
-16	Semi-Mount w/15" Laminated Tires and Driveline	436#	436#	\$ 2,124
	Choose One For Pull-Type (must choose hitch below)			
-12-31	Pull-Type w/ Equal Angle Input Driveline - Single wheel axle	605#	605#	\$ 3,090
-12-32	Pull-Type w/ Constant Velocity Input Driveline - Single wheel axle	653#	653#	\$ 3,497
-14-31	Pull-Type w/ Equal Angle Input Driveline - Dual wheel axle	633#	633#	\$ 3,217
-14-32	Pull-Type w/ Constant Velocity Input Driveline - Dual wheel axle	681#	681#	\$ 3,644
	Choose One Tire Feature - Pull-Type Only			
-20	21" Laminated Tires - Set of 2	139#	139#	\$ 317
-21	29" Used Aircraft Tires - Set of 2	150#	150#	\$ 464
-24	24" Foam Filled Used Aircraft Tires - Set of 2	192#	192#	\$ 783
-25	21" Laminated Tires - Set of 4	278#	278#	\$ 635
-27	29" Used Aircraft Tires - Set of 4	300#	300#	\$ 936
-28	24" Foam Filled Used Aircraft Tires - Set of 4	384#	384#	\$ 1,562
	Choose One Rear Guard			
-41	Rear Single Chain Guard (326-462A)	35#	35#	\$ 181
-42	Rear Rubber Guard (326-525A)	7#	7#	\$ 164
-43	Rear Double Chain Guard (326-463A)	50#	50#	\$ 388
	Choose One Height Adjustment			
-51	Ratchet Jack- Pull-Type, Semi-Mount, 3-Point	20#	20#	\$ 129
-52	Hydraulic Cylinder and Hoses-Pull-type, Semi-Mount	40#	40#	\$ 480
-53	Hydraulic Cylinder and Hoses - 3-Point only	37#	37#	\$ 480
	Choose a Hitch Option - Pull-Type Only			
-71	Swivel Hitch	23#	23#	\$ N/C
-75	Performance Hitch* - Self Leveling, Up and Down and Side to Side Swivel	60#	60#	\$ 283
	You May Choose a Color Option (No Option=Buckskin)			
-81	Green			
-82	Orange			
-83	Red			

^Gearbox HP rating is based on in field use and performance

*If used on Kubota L Series tractor, must order Option -31 Equal Angle Driveline

RCF(M)36 Series - 8' Heavy Duty

Semi-Mount: 40-130 HP • Pull-Type: 50-130 HP • Lift Type: 50-130 HP



Cutting Width: 8'
 Overall Width: 8' 7"
 Cutting Height: 2" - 12"
 Cutting Capacity: 3"
 Lift-Type, Semi-Mount: Cat. 1 & 2, Quick Hitch Adaptable
 Pull-Type: Self-Leveling w/ Dual-Leveling Rods
 Tongue Jack on Pull-Type
 Deck Height: 13"
 Deck Thickness: 10 Gauge; Side Skirt Thickness: 1/4"
 Gearbox Rating^: Outboard - 210 HP; T-Box - 210 HP
 Gearbox: 540 rpm or 1,000 rpm
 Beveled Gears, Cast Iron Housing

Gearbox Input Shaft: 1 3/4" - 20 Spline
 Output Shaft Diameter: 2 3/8"
 Driveline: Cat. 4; Equal Angle Shaft on Pull-Type
 Slip-Clutch Protection
 Rubber Flex Coupler to Wing Boxes
 Blade Holder: 2 ea., 3/16" Stump Jumper
 Blades: 2 per Blade Holder; 1/2" x 4" Heat Treated
 Free Swinging Suction Blades
 Blade Tip Speed: 540 rpm - 17,100 fpm
 1000 rpm - 17,375 fpm
 Tailwheels: See selections below
 Tapered Roller Bearings & Cast Iron Hub
 Replaceable Skids
 Spring Shock Absorber on Pull-Type & Semi-Mount Axle

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WT	SHIPPING WEIGHT	MODEL DOWNGRADE PRICE
RCF3696	36 SERIES - 8' ROTARY CUTTER - 540 rpm	1393#	1393#	\$ -8,083
RCFM3696	36 SERIES - 8' ROTARY CUTTER - 1000 rpm	1393#	1393#	\$ -8,083
ADD OPTION NUMBER	You Must Choose One Front Guard			
-01	Front Single Chain Guard (326-541A)	72#	72#	\$ 291
-02	Front Rubber Guard (326-543A)	32#	32#	\$ 210
-03	Front Double Chain Guard (326-542A)	100#	100#	\$ 383
	Choose One Hitch Feature			
-11	3-Point, 15" Laminated with Dual Beam Axles, includes Driveline	346#	346#	\$ 1,887
-12	Pull-Type with Single Spindle HD Toolbar Axle (choose hitch below)	560#	560#	\$ 2,093
-13	Semi-Mount, HD Toolbar Axle w/two 21" Laminated, includes Driveline	524#	524#	\$ 2,594
-14	Pull-Type with Dual Spindle HD Toolbar Axle (choose hitch below)	578#	578#	\$ 2,229
-16	Semi-Mount, HD Toolbar Axle w/two 15" Laminated, includes Driveline	420#	420#	\$ 2,124
-17	3-Point, HD Toolbar Axle w/two 15" Laminated, includes Driveline	420#	420#	\$ 2,347
-18	3-Point, HD Toolbar Axle w/two 21" Laminated, includes Driveline	524#	524#	\$ 3,526
	Choose One Tire Feature - Pull-Type Only			
-20	21" Laminated Tires - Set of 2	139#	139#	\$ 317
-21	29" Used Aircraft Tires - Set of 2	150#	150#	\$ 464
-24	25.5" New Foam Filled Tires - Set of 2	192#	192#	\$ 782
-25	21" Laminated Tires - Set of 4	278#	278#	\$ 635
-27	29" Used Aircraft Tires - Set of 4	300#	300#	\$ 936
-28	25.5" New Foam Filled Tires - Set of 4	384#	384#	\$ 1,562
	Choose One Driveline Feature - Pull-Type Only			
-31	Equal Angle Driveline - 540 or 1000 rpm	75#	75#	\$ 854
-32	Constant Velocity Driveline - 540 or 1000 rpm	75#	75#	\$ 1,562
	You Must Choose One Rear Guard			
-41	Rear Single Chain Guard (326-535A)	28#	28#	\$ 155
-42	Rear Rubber Guard (326-545A)	5#	5#	\$ 141
-43	Rear Double Chain Guard (326-536A)	40#	40#	\$ 388
	Choose One Height Adjustment- Not Needed with Option 11			
-51	Ratchet Jack	20#	20#	\$ 129
-52	Hydraulic Cylinder and Hoses - Pull-Type or Semi-Mount Only	40#	40#	\$ 480
-53	Hydraulic Cylinder and Hoses - 3-Point, HD Tool Bar Axle	37#	37#	\$ 480
	Choose a Hitch Option - Pull-Type Only			
-71	Swivel Hitch	23#	23#	\$ N/C
-75	Performance Hitch* - Self Leveling, Up and Down and Side to Side Swivel	60#	60#	\$ 283
	You May Choose a Color Option (No Option=Buckskin)			
-81	Green			
-82	Orange			
-83	Red			

[^]Gearbox HP rating is based on in field use and performance

*If used on Kubota L Series tractor, must order Option -31 Equal Angle Driveline

RCF27 Series - Medium Duty

60/72: 35-130 HP • 84: 60-130 HP



Hitch: 60" & 72" Cat. 1* or 2 (QH Adaptable)
 84": Cat. 2 Std. or Cat. 3 QH Adaptable or Pull-Type
 All Welded Deck
 Deck Height:
 60" & 72" is 11¹/₄"
 84" is 10¹/₈"
 Deck Thickness: 10 Gauge
 Side Panels: 1/4"

Gearbox Rating[^]: 130 HP
 Gearbox: 540 RPM, 1³/₈" - 6 Spline
 Gearbox Output Shaft: 2"
 Driveline: Cat. 4 with 4 Plate Slip-Clutch
 Stump Jumper: 60" - 3/16" x 24" Round
 72" - 3/16" x 30¹/₂" Round
 84" - 3/16" x 24" x 38" Oval
 Blades: Free Swinging High Suction
 60" - 1/2" x 4" x 25"
 72" - 1/2" x 4" x 29"
 84"- 1/2" x 4" x 31"
 Blade Bolt: Keyed with Hardened
 Flat Washer & Lock Nut
 Blade Tip Speed:
 60" - 12,384 fpm
 72" - 14,861 fpm
 84" - 14,369 fpm
 Tailwheel(s): 15" Laminated, with Cast
 Iron Hub, Tapered Roller Bearings
 Cutting Height: 1¹/₂" - 12"
 Cutting Capacity: 3"
 Skids: Replaceable
 Front and Rear Guards Available

MODEL NUMBER	DESCRIPTION	APPROX. MACHINE WEIGHT	SHIPPING WEIGHT	MODEL DOWNGRADE PRICE
RCF2760	27 SERIES - 60" ROTARY CUTTER <u>You Must Choose Front and Rear Guarding</u>	864#	944#	\$ 13,994
-01	Front Chain Guard (326-302A)	39#	39#	\$ 225
-02	Front Rubber Guard (326-303A)	24#	24#	\$ 165
-41	Rear Chain Guard (326-929A)	66#	66#	\$ 266
RCF2772	27 SERIES - 72" ROTARY CUTTER <u>You Must Choose Front and Rear Guarding</u>	967#	1047#	\$ -13,188
-01	Front Chain Guard (326-306A)	45#	45#	\$ 265
-02	Front Rubber Guard (326-307A)	28#	28#	\$ 182
-41	Rear Chain Guard (326-930A)	73#	73#	\$ 306
RCF2784	27 SERIES - 84" ROTARY CUTTER <u>You Must Choose Front Guarding</u>	989#	1069#	\$ 12,864
-01	Front Chain Guards (312-869A)	46#	46#	\$ 299
-02	Front Rubber Guard (312-866A)	25#	25#	\$ 1976
	<u>You Must Choose One for RCF2784</u>			
-11	3 Point with Single 15" Laminated Tire	262#	262#	\$ 972
-14	3 Point with Dual 15" Laminated Tires	500#	500#	\$ 1,310
-12	Pull-Type with 21" Laminated Tires	335#	335#	\$ 2,687
	<u>You Must Choose One for Pull-Type RCF2784</u>			
-21	Ratchet Height Adjustment	15#	15#	\$ 236
-22	Hydraulic Type Adjustment	40#	40#	\$ 456
	<u>You Must Choose Rear Guarding</u>			
-41	Rear Chain Guards (326-931A)	62#	62#	\$ 328
	<u>COLOR OPTION (No Option=Buckskin)</u>			
-81	Green (84" only)			
-82	Orange			
-83	Red (84" only)			
	<u>Available Through Parts Dept. Only</u>			
326-607A	*Requires Top 3 Pt Cat 2/Cat 1 Conversion Kit			

[^]Gearbox HP rating is based on in field use and performance

WARNING!

Rotary Cutters used in non-agricultural areas must be equipped with front & rear guards. The possibility of thrown objects can be hazardous to persons or property.