



Technical Specifications

Powertrain

Transmission

Drivetrain	Rear Wheel Drive	Trans Order Code	IR7
Trans Type	6	Trans Description Cont.	Automatic
Trans Description Cont. Again	N/A	First Gear Ratio (:1)	3.742
Second Gear Ratio (:1)	2.003	Third Gear Ratio (:1)	1.343
Fourth Gear Ratio (:1)	1.000	Fifth Gear Ratio (:1)	0.773
Sixth Gear Ratio (:1)	0.634	Reverse Ratio (:1)	N/A
Clutch Size	N/A	Trans Power Take Off	N/A
Final Drive Axle Ratio (:1)	N/A	Transfer Case Model	N/A
Transfer Case Power Take Off	N/A	Second Reverse Gear Ratio (:1)	N/A
Third Reverse Gear Ratio (:1)	N/A	Fourth Reverse Gear Ratio (:1)	N/A
Fifth Reverse Gear Ratio (:1)	N/A	Sixth Reverse Gear Ratio (:1)	N/A
Transmission Manufacturer	Aisin A465	Transmission Type	N/A
ngine			
Engine Order Code	I1B	Engine Type	Turbocharged Diesel I4
Displacement	5.2L/317	Fuel System	Direct Injection
SAE Net Horsepower @ RPM	215 @ 2500	SAE Net Torque @ RPM	452 @ 1850-2750
Engine Oil Cooler	N/A	Governed Engine Speed (RPM)	N/A
Engine Series	4HK1-TC		
lectrical			
Cold Cranking Amps @ 0° F (Primary)	750	Cold Cranking Amps @ 0° F (2nd)	N/A
Cold Cranking Amps @ 0° F (3rd)	N/A	Maximum Alternator Capacity (amps)	140
ooling System			

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

hicle			
Axle Ratio - Low Rear (:1)	N/A	As Spec Curb Weight - Front	3907.00 lbs
As Spec Curb Weight - Rear	2057.00 lbs		
ssis			
ght Information			
Standard Weight - Front	0.00 lbs	Standard Weight - Rear	0.00 lbs
Total Weight	6314.00 lbs	Gross Axle Wt Rating - Front	5360 lbs
Gross Axle Wt Rating - Rear	9880 lbs	Curb Weight - Front	3907 lbs
Curb Weight - Rear	2057 lbs	Option Weight - Front	0.00 lbs
Option Weight - Rear	0.00 lbs	Reserve Axle Capacity - Front	1453.00 lbs
Reserve Axle Capacity - Rear	7823.00 lbs	As Spec'd Curb Weight	5964.00 lbs
As Spec'd Payload	8536.00 lbs	Gross Combined Wt Rating	20500 lbs
Cargo Weight	0.00 lbs	Gross Vehicle Weight	6314.00 lbs
Axle Weight	N/A	Gross Axle Weight Rating	15240.00 lbs
Curb Weight	5964.00 lbs	Reserve Axle Capacity	9276.00 lbs
Total Option Weight	0.00 lbs	Payload Weight Front	0.00 lbs
Payload Weight Rear	0.00 lbs	Maximum Axle Rating Front	2680.00 lbs
Maximum Axle Rating Rear	2470.00 lbs	Maximum Axle Rating Total	5150.00 lbs
Gross Vehicle Weight Rating	14500.00 lbs	Front PayLoad	N/A
Rear Payload	N/A	Total Payload Weight (Cargo + Driver + Body)	350.00 lbs
ne			
Frame Type	Ladder-Type C- Section	Sect Modulus Rails Only	7.20 in ³
Frame RBM	316800	Frame Strength	44000 lbs
Frame Thickness	8.50 x 2.76 x 0.24 in		
pension			
Suspension Type - Front	Independent w/Tapered Leaf Springs	Suspension Type - Rear	Independent w/Multi-Leaf Springs

Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Chassis

Suspension

Spring Capacity - Front	6830 lbs	Spring Capacity - Rear	9880 lbs
Axle Type - Front	I-Beam	Axle Type - Rear	Full-Floating
Axle Capacity - Front	6830 lbs	Axle Capacity - Rear	11020 lbs
Axle Ratio (:1) - Front	N/A	Axle Ratio (:1) - Rear	4.555
Shock Absorber Diameter - Front	42.0 mm	Shock Absorber Diameter - Rear	42.0 mm
Stabilizer Bar Diameter - Front	1.65 in	Stabilizer Bar Diameter - Rear	N/A
Tires			
Front Tire Order Code	2TA	Rear Tire Order Code	3TA
Spare Tire Order Code	N/A	Front Tire Size	LT215/85R16
Rear Tire Size	LT215/85R16	Spare Tire Size	N/A
Front Tire Capacity	2680 lbs	Rear Tire Capacity	2470 lbs
Spare Tire Capacity	N/A	Revolutions/Mile @ 45 mph - Front	682.9
Revolutions/Mile @ 45 mph - Rear	682.9	Revolutions/Mile @ 45 mph - Spare	N/A
Tire Rating Total	5150.00		
Wheels			
Front Wheel Size	16 x 6 in	Rear Wheel Size	16 x 6 in
Spare Wheel Size	N/A	Front Wheel Material	Steel
Rear Wheel Material	Steel	Spare Wheel Material	N/A
Rear Wheel Material Front Bolt Pattern	Steel 6 Hole JIS 8.75"	Spare Wheel Material Rear Bolt Pattern	N/A 6 Hole JIS 8.75"
Front Bolt Pattern	6 Hole JIS 8.75"		
Front Bolt Pattern Spare Bolt Pattern	6 Hole JIS 8.75"		
Front Bolt Pattern Spare Bolt Pattern Steering	6 Hole JIS 8.75" N/A	Rear Bolt Pattern	6 Hole JIS 8.75"
Front Bolt Pattern Spare Bolt Pattern Steering Steering Type	6 Hole JIS 8.75" N/A Pwr	Rear Bolt Pattern Steering Ratio (:1), On Center	6 Hole JIS 8.75" 18.8-20.9
Front Bolt Pattern Spare Bolt Pattern Steering Steering Type Steering Ratio (:1), At Lock	6 Hole JIS 8.75" N/A Pwr 18.8-20.9	Rear Bolt Pattern Steering Ratio (:1), On Center	6 Hole JIS 8.75" 18.8-20.9
Front Bolt Pattern Spare Bolt Pattern Steering Steering Type Steering Ratio (:1), At Lock Turning Diameter - Wall to Wall	6 Hole JIS 8.75" N/A Pwr 18.8-20.9	Rear Bolt Pattern Steering Ratio (:1), On Center	6 Hole JIS 8.75" 18.8-20.9

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

<u>____</u>

Vehicle: [Fleet] 2023 Chevrolet 4500HD LCF Diesel (CT31003) 2WD Reg Cab 109"

(🗸	Complete)
<u>۱</u>	Complete	1

hassis			
Brakes			
Disc - Rear (Yes or)	N/A	Front Brake Rotor Diam x Thickness	11.5 x -TBD- in
Rear Brake Rotor Diam x Thickness	N/A	Drum - Front (Yes or)	N/A
Front Drum Diam x Width	N/A	Drum - Rear (Yes or)	Yes
Rear Drum Diam x Width	12.6 x 3.94 in		
Fuel Tank			
Fuel Tank Capacity, Approx	30.0 gal	Aux Fuel Tank Capacity, Approx	N/A
Fuel Tank Location	Frame Rail	Aux Fuel Tank Location	N/A
Trailering			
Trailer Weight	0.0 lbs		
mensions			
nterior Dimensions			
Passenger Capacity	3	Front Head Room	38.4 in
Front Leg Room	29.5 in	Front Shoulder Room	70.7 in
Front Hip Room	67.7 in		
Exterior Dimensions			
Wheelbase	109.0 in	Length, Overall w/o rear bumper	200.5 in
Length, Overall	N/A	Width, Max w/o mirrors	81.3 in
Height, Overall	90.8 in	Overhang, Front	48.4 in
Overhang, Rear w/o bumper	43.1 in	Front Bumper to Back of Cab	70.9 in
Cab to Axle	86.5 in	Cab to End of Frame	129.6 in
Ground to Top of Load Floor	N/A	Ground to Top of Frame	31.1 in
Frame Width, Rear	33.5 in	Ground Clearance, Front	7.5 in
Ground Clearance, Rear	7.5 in	Body Length	0.0 ft
Cab to Body	0.0 in	Frontal Area	0.00 ft ²

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Medium Duty

Medium Duty Performance

Front Axle %	N/A	Rear Axle %	
river Weight	350.0 lbs	Front Ground Load	
ear Ground Load	N/A	1st gear High Speed (High Axle Gear)	
d gear High Speed (High Axle Gear)	N/A	3rd gear High Speed (High Axle Gear)	
gear High Speed (High Axle Gear)	N/A	5th gear High Speed (High Axle Gear)	
n gear High Speed (High Axle Gear)	N/A	1st gear Low Speed (High Axle Gear)	
I gear Low Speed (High Axle Gear)	17.82 MPH	3rd gear Low Speed (High Axle Gear)	
gear Low Speed (High Axle Gear)	35.68 MPH	5th gear Low Speed (High Axle Gear)	
gear Low Speed (High Axle Gear)	56.28 MPH	1st gear High Speed (Low Axle Gear)	
gear High Speed (Low Axle Gear)	N/A	3rd gear High Speed (Low Axle Gear)	
gear High Speed (Low Axle Gear)	N/A	5th gear High Speed (Low Axle Gear)	
ear High Speed (Low Axle Gear)	N/A	1st gear Low Speed (Low Axle Gear)	
gear Low Speed (Low Axle Gear)	N/A	3rd gear Low Speed (Low Axle Gear)	
gear Low Speed (Low Axle Gear)	N/A	5th gear Low Speed (Low Axle Gear)	
gear Low Speed (Low Axle Gear)	N/A	Reduction	
ue @ Clutch Engage	N/A	Starting Grade Index	
Gear Tractive Effort (High Axle Gear)	5471.68	2nd Gear Tractive Effort (High Axle Gear))
ear Tractive Effort (High Axle Gear)	1963.78	4th Gear Tractive Effort (High Axle Gear)	
ear Tractive Effort (High Axle Gear)	1130.31	6th Gear Tractive Effort (High Axle Gear)	
ear Tractive Effort (Low Axle Gear)	N/A	2nd Gear Tractive Effort (Low Axle Gear)	
Gear Tractive Effort (Low Axle Gear)	N/A	4th Gear Tractive Effort (Low Axle Gear)	
Gear Tractive Effort (Low Axle Gear)	N/A	6th Gear Tractive Effort (Low Axle Gear)	
Gear Gradeability (High Axle Gear)	N/A	2nd Gear Gradeability (High Axle Gear)	
Gear Gradeability (High Axle Gear)	N/A	4th Gear Gradeability (High Axle Gear)	
Gear Gradeability (High Axle Gear)	N/A	6th Gear Gradeability (High Axle Gear)	
Gear Gradeability (Low Axle Gear)	51.89	2nd Gear Gradeability (Low Axle Gear)	
Gear Gradeability (Low Axle Gear)	17.58	4th Gear Gradeability (Low Axle Gear)	
Gear Gradeability (Low Axle Gear)	8.16	6th Gear Gradeability (Low Axle Gear)	
ared Road Speed	0.00 MPH	Actual Loaded Speed	

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Medium Duty


Medium Duty Performance

Grade (%)	2.0	Maximum Speed Gradeability	N/A
Torque Converter	1.7639	Maximum Capacity @ 0° F	750.00
% of Body on Front Axle	73.39	% of Body on Rear Axle	26.61
Body Weight Front	0.00 lbs	Body Weight Rear	0.00 lbs
Actual Loaded Speed (First Part, MPH)	N/A	Actual Loaded Speed (Second Part, RPM)	
Actual Loaded Speed (Third Part, Gear)		Road Type	Concrete
Body Weight	0.0 lbs	Driver Weight Front	N/A
Driver Weight Rear	N/A	Medium Duty Body Type	None
Front Total Load	3907.00 lbs	Rear Total Load	2057.00 lbs

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Weight Distribution

SPECIFICATION SUMMARY	
Model #	CT31003
Truck/Tractor	
Wheelbase (WB)	109.0 in
Cab to Axle (CA)	86.5 in
Cab to Body/Swing Clear (BOC)	0.0 in
Body Length	0.0 ft
Body Weight	0.0 lbs
Cargo Weight	0.00 lbs
Front GAWR	5360 lbs
Rear GAWR	9880 lbs
GVWR	14500.00 lbs

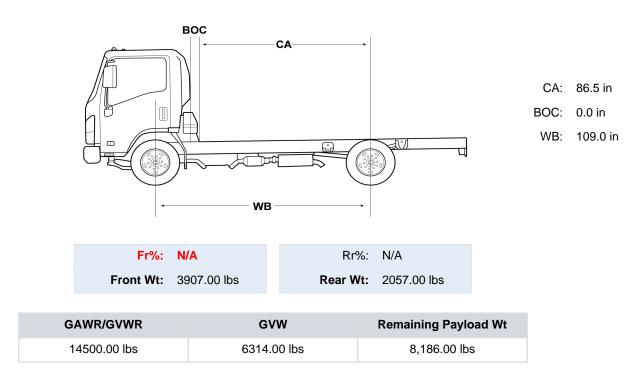

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Weight Distribution

SPECIFICATION DETAILS			
	Front Axle	Rear Axle	Total
Actual			
Chassis	3907.00 lbs	2057.00 lbs	5964.00 lbs
Body	0.00 lbs	0.00 lbs	0.0 lbs
Payload	0.00 lbs	0.00 lbs	0.00 lbs
Trailer			0.0 lbs
Totals	3907.00 lbs	2057.00 lbs	6314.00 lbs
Capacity			
Axle	5360 lbs	9880 lbs	15240.00 lbs
Suspension	6830 lbs	9880 lbs	16,710.00 lbs
Tire	2680 lbs	2470 lbs	5150.00
Total Axle Rating	2680.00 lbs	2470.00 lbs	5150.00 lbs

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Selected Model and Options

CODE	MODEL			MSRP
CT31003	2023 Chevrolet 4500HD LCF Diesel 2WD Reg Cab 109"			\$58,015.0
OLORS				
CODE	DESCRIPTION			
16U	Arc White			
EQUIRED OPTI	ON			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRF
R9J	Ocean Freight Surcharge (Required on all models until further notice.)	0.00 lbs	0.00 lbs	\$2,475.0
NGINE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRF
I1B	Engine, Diesel 5.2L 4 cylinder 215 hp [160.3 kW] @2500 rpm, 452 lb-ft of torque [612.8 Nm] @ 1850-2750 rpm (Governed). 16 valve, four cycle, chain-driven dual overhead camshaft valve train, a cast iron cylinder block, and a cast aluminum cylinder head. Turbocharged, inter-cooled, water cooled EGR, direct injection, electronically controlled common rail fuel system and engine cruise control. Oil level check switch and light. Engine warning system with audible warning for low oil pressure, high coolant temperature, and a protection system that will reduce fueling if excessive coolant temperature is detected (STD)	0.00 lbs	0.00 lbs	\$0.00
RANSMISSION				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
IR7	Transmission, 6-speed automatic Aisin A465 transmission with fifth and sixth gear overdrive with lock up in 2nd, 3rd, 4th, 5th and 6th, PTO capability automatic torque converter lockup in stationary PTO mode. (STD)	0.00 lbs	0.00 lbs	\$0.00
XLE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRF
005	Rear axle, 4.56 ratio	0.00 lbs	0.00 lbs	\$0.00

Performance figures are guidelines only, and actual performance, and so not include certain rece, taxes and only get individually by intributation of regic input is subject to the accuracy of the input provided. Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.

PREFERRED EQ	UIPMENT GROUP			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
1WT	Preferred Equipment Group includes standard equipment	0.00 lbs	0.00 lbs	\$0.00
FRONT TIRES				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
2TA	Tires, front, LT215/85R16 E 115/112 L BW ALS VAR1 (STD)	0.00 lbs	0.00 lbs	\$0.00
REAR TIRES				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
3TA	Tires, rear, LT215/85R16 E 115/112 L BW ALS VAR1 (STD)	0.00 lbs	0.00 lbs	\$0.00
PAINT				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
16U	Arc White	0.00 lbs	0.00 lbs	\$0.00
SEAT TYPE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
A1F	Seat, front high back bucket driver and passenger tricoat cloth covered reclining high back driver seat with single two occupant fold down passenger seat (STD)	0.00 lbs	0.00 lbs	\$0.00
SEAT TRIM				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

0.00 lbs

0.00 lbs

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.

Medium Ash Gray, Cloth Seat Trim

H72

\$0.00

RADIO				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
UIZ	Audio System, AM/FM stereo with CD player, auxiliary jack, USB port and Bluetooth (STD)	0.00 lbs	0.00 lbs	\$0.00
	Options Total	0.00 lbs	0.00 lbs	\$2,475.00
	As Specified Curb Weight	3907.00 lbs	2057.00 lbs	

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Standard Equipment

Mechanical	
	Emissions, 50 state certification
	Engine, Diesel 5.2L 4 cylinder 215 hp [160.3 kW] @2500 rpm, 452 lb-ft of torque [612.8 Nm] @ 1850-2750 rpm (Governed). 16 valve, four cycle, chain-driven dual overhead camshaft valve train, a cast iron cylinder block, and a cast aluminum cylinder head. Turbocharged, inter-cooled, water cooled EGR, direct injection, electronically controlled common rail fuel system and engine cruise control. Oil level check switch and light. Engine warning system with audible warning for low oil pressure, high coolant temperature, and a protection system that will reduce fueling if excessive coolant temperature is detected (STD)
	Transmission, 6-speed automatic Aisin A465 transmission with fifth and sixth gear overdrive with lock up in 2nd, 3rd, 4th, 5th and 6th, PTO capability automatic torque converter lockup in stationary PTO mode. (STD)
	Rear axle, 4.56 ratio
	Air cleaner, heavy-duty, 11" diameter dry paper single element. Air cleaner canister standard with air restriction gauge. Back of cab location.
	Drivetrain, rear-wheel drive
	Battery, dual 750 cold-cranking amps, 12 volt, maintenance free
	Alternator, 140 amps
	Frame, ladder-type channel frame. Full C section straight frame 33.5" (85.1 cm) wide. Yield strength 44,000 psi, section modulus 7.20 cu.in. and RBM 316,800 lb-ft/in per rail.
	Incomplete vehicle certification
	Wheelbase, 109" (276.9 cm)
	GVWR, 14,500 lbs. (6577 kg)
	Front suspension, 6,830 lbs. (3098 kg) tapered leaf, semi-elliptical steel alloy. Includes shock absorbers and stabilizer bar.
	Rear Suspension, 9,880 lbs. (4481kg), multi-leaf, semi-elliptical steel alloy. Includes shock absorbers
Front axle, 6,830 lbs. (3098 kg), reverse Elliot "I"-beam includes integral hydraulic power steering. r 20.9:1	Front axle, 6,830 lbs. (3098 kg), reverse Elliot "I"-beam includes integral hydraulic power steering. ratio 18.8- 20.9:1
	Rear axle, 11,020 lbs. (4998 kg) R050, full-floating single-speed with oil lubricated rear wheel-bearings
	Vehicle Application Truck
	Brakes, 4-wheel antilock, front and rear disc with traction control and stability control
	Exhaust brake
	Fuel tank, 30 Gallon, (113L), stainless steel includes 2 auxiliary fuel ports
	Exhaust, single horizontal outlet
Exterior	

Tires, front, LT215/85R16 E 115/112 L BW ALS VAR1 (STD)

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Exterior	
	Tires, rear, LT215/85R16 E 115/112 L BW ALS VAR1 (STD)
	Wheels, 16" x 6, K. steel
	Grille, Silver
	Assist steps
	Glass, tinted
	LED Headlamps
	Mirror, outside left-hand and right hand dual cab-mounted with integral convex mirror
	Windshield wiper, pulse, wet arm
Entertainment	
	Audio System, AM/FM stereo with CD player, auxiliary jack, USB port and Bluetooth (STD)
	Audio system feature, 2 speakers
Interior	
	Seat, front high back bucket driver and passenger tricoat cloth covered reclining high back driver seat with single two occupant fold down passenger seat (STD)
	Seat trim, Cloth
	Cup holders
	Floor mats
	Steering wheel, urethane
	Steering wheel, tilt and telescopic
	Driver Information Center, (DIC) (monitors vital functions including diesel exhaust fluid levels (DEF), particulate matter emissions level in the diesel particulate filter (DPF), diesel particulate filter regeneration, service reminders for engine oil, transmission oil, differential oil, power steering fluid, engine oil filter, and fuel filters. The DIC provides fuel economy reporting by average, instant, and trip.)
	Air conditioning, single-zone manual, integral in-dash mounted
	Windows, power
	Door locks, power
	Cruise control, electronic, automatic
	Windshield washer bottle access on passenger side dash when passenger-side door is open
	Storage, door pockets
	Lighting, interior dome
	Storage, seatback pockets

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.


Safety-Mechanical	
	Brake, parking, cable actuated, internal expanding drum type, transmission-mounted
Safety-Exterior	
	Daytime Running Lamps
WARRANTY	
	Warranty Note: <<< Preliminary 2023 Warranty >>> Basic Years: 3 Basic Miles/km: Unlimited Drivetrain Years: 3 Drivetrain Miles/km: Unlimited Corrosion Years: 4 Corrosion Miles/km: Unlimited Rear Axle Years: 3 Rear Axle Miles/km: Unlimited Frame Rail Years: 3 Frame Rail Miles/km: Unlimited Frame Rail Note: 3 years/Unlimited Miles (no charge) AND up to 5 years/Unlimited miles (50% charge) Roadside Assistance Years: 3 Roadside Assistance Miles/km: Unlimited Maintenance Note: 1 Year/1 Visit

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Geared Road Speed

SPECIFICATION SUMMARY	
Model #	CT31003
Engine Order Code	I1B
Model Manufacturer	4HK1-TC
Туре	Turbocharged Diesel I4
Displacement	5.2L/317
Horsepower	215 @ 2500
Starting Torque	N/A
Transmission Order Code	IR7
Model Manufacturer	Aisin A465
Туре	6-Speed Automatic
Rear Axle Order Code	
Model Manufacturer	N/A
Weight Rating	9880 lbs
Ratio:1	4.555
Rear Tires	LT215/85R16
Revolutions/Mile Front	682.9
Revolutions/Mile Rear	682.9
Surface Type	Concrete
Desired Grade	2%

Geared Road Speed

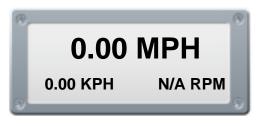

0% Grade in gear

Actual Loaded Speed






Note: Simulated speedometer appearance may not correspond with selected equipment.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Gradeability Chart

-	
SPECIFICATION SUMMARY	
Model #	CT31003
Engine Order Code	I1B
Model Manufacturer	4HK1-TC
Туре	Turbocharged Diesel I4
Displacement	5.2L/317
Horsepower	215 @ 2500
Starting Torque	N/A
Transmission Order Code	IR7
Model Manufacturer	Aisin A465
Туре	6-Speed Automatic
Rear Axle Order Code	
Model Manufacturer	N/A
Weight Rating	9880 lbs
Ratio:1	4.555
Rear Tires	LT215/85R16
Revolutions/Mile Front	682.9
Revolutions/Mile Rear	682.9
Surface Type	Concrete
Desired Grade	2%

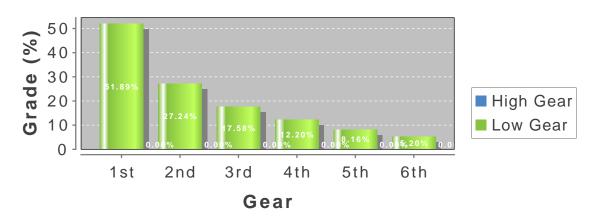


This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Turning Circle

SPECIFICATION SUMMARY	
Model #	CT31003
Front Axle Order Code	
Capacity (lbs)	6830 lbs
Wheelbase Order Code	
Wheelbase (in)	109.0 in
Front Wheel Order Code	
Size/Type (in)	16 x 6 in
Front Tire Order Code	2TA
Size/Type	LT215/85R16

Wall to Wall (ft): 37.1 ft

Wall to Wall diameter is measured from the outermost part of the cab.

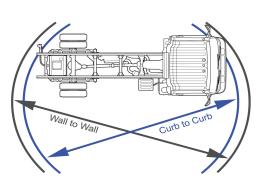

Curb to Curb (ft): 31.5 ft

Curb to Curb diameter is measured from the outside of the front tire.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.