





Technical Specifications

<u> </u>			
Powertrain			
Transmission			
Drivetrain	Rear Wheel Drive	Trans Order Code	MWA
Trans Type	6	Trans Description Cont.	Automatic
Trans Description Cont. Again	N/A	First Gear Ratio (:1)	3.10
Second Gear Ratio (:1)	1.80	Third Gear Ratio (:1)	1.40
Fourth Gear Ratio (:1)	1.00	Fifth Gear Ratio (:1)	0.70
Sixth Gear Ratio (:1)	0.61	Reverse Ratio (:1)	N/A
Clutch Size	N/A	Trans Power Take Off	N/A
Final Drive Axle Ratio (:1)	N/A	Transfer Case Model	N/A
Transfer Case Power Take Off	N/A	Second Reverse Gear Ratio (:1)	N/A
Third Reverse Gear Ratio (:1)	N/A	Fourth Reverse Gear Ratio (:1)	N/A
Fifth Reverse Gear Ratio (:1)	N/A	Sixth Reverse Gear Ratio (:1)	N/A
Transmission Manufacturer	Allison	Transmission Type	A1700HS Allison
Engine			
Engine Order Code	L5D	Engine Type	Turbocharged Diesel V8
Displacement	6.6L/402	Fuel System	Direct Injection
SAE Net Horsepower @ RPM	350 @ 2700	SAE Net Torque @ RPM	700 @ 1600
Engine Oil Cooler	Yes	Governed Engine Speed (RPM)	2900
Engine Series	Duramax		
Electrical			
Cold Cranking Amps @ 0° F (Primary)	1100	Cold Cranking Amps @ 0° F (2nd)	1100
Cold Cranking Amps @ 0° F (3rd)	N/A	Maximum Alternator Capacity (amps)	150
Cooling System			
Total Cooling System Capacity	48 qts		

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



ehicle			
Vehicle			
Axle Ratio - Low Rear (:1)	N/A	As Spec Curb Weight - Front	4704.00 lbs
As Spec Curb Weight - Rear	2803.00 lbs		
hassis			
Weight Information			
Standard Weight - Front	0.00 lbs	Standard Weight - Rear	0.00 lbs
Total Weight	7857.00 lbs	Gross Axle Wt Rating - Front	7000 lbs
Gross Axle Wt Rating - Rear	11000 lbs	Curb Weight - Front	4704 lbs
Curb Weight - Rear	2803 lbs	Option Weight - Front	0.00 lbs
Option Weight - Rear	0.00 lbs	Reserve Axle Capacity - Front	1946.00 lbs
Reserve Axle Capacity - Rear	8197.00 lbs	As Spec'd Curb Weight	7507.00 lbs
As Spec'd Payload	10493.00 lbs	Gross Combined Wt Rating	26000 lbs
Cargo Weight	0.00 lbs	Gross Vehicle Weight	7857.00 lbs
Axle Weight	7857.00 lbs	Gross Axle Weight Rating	18000.00 lbs
Curb Weight	7507.00 lbs	Reserve Axle Capacity	10143.00 lbs
Total Option Weight	0.00 lbs	Payload Weight Front	0.00 lbs
Payload Weight Rear	0.00 lbs	Maximum Axle Rating Front	7000.00 lbs
Maximum Axle Rating Rear	11000.00 lbs	Maximum Axle Rating Total	18000.00 lbs
Gross Vehicle Weight Rating	18000.00 lbs	Front PayLoad	350.00 lbs
Rear Payload	0.00 lbs	Total Payload Weight (Cargo + Driver + Body)	350.00 lbs
Frame			
Frame Type	High Strength Low Alloy Steel	Sect Modulus Rails Only	8.08 Front/10.93 Belly/8.47 Rear in
Frame RBM	404000 Front/546500 Belly/423500 Rear	Frame Strength	50000 lbs
Frame Thickness	0.3125 in		
Suspension			
Suspension Type - Front	Multi-Leaf	Suspension Type - Rear	Multi-Leaf

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



hassis			
Guspension			
Spring Capacity - Front	7000 lbs	Spring Capacity - Rear	11000 lbs
Axle Type - Front	I-Beam	Axle Type - Rear	Single Reduction
Axle Capacity - Front	7000 lbs	Axle Capacity - Rear	11000 lbs
Axle Ratio (:1) - Front	N/A	Axle Ratio (:1) - Rear	4.10
Shock Absorber Diameter - Front	51 mm	Shock Absorber Diameter - Rear	N/A
Stabilizer Bar Diameter - Front	N/A	Stabilizer Bar Diameter - Rear	N/A
Tires			
Front Tire Order Code	XDK	Rear Tire Order Code	YAL
Spare Tire Order Code	N/A	Front Tire Size	225/70R19.5G
Rear Tire Size	225/70R19.5G	Spare Tire Size	N/A
Front Tire Capacity	7940 lbs	Rear Tire Capacity	15000 lbs
Spare Tire Capacity	N/A	Revolutions/Mile @ 45 mph - Front	640
Revolutions/Mile @ 45 mph - Rear	640	Revolutions/Mile @ 45 mph - Spare	N/A
Tire Rating Total	22940.00		
Vheels			
Front Wheel Size	19.5 x 6.75 in	Rear Wheel Size	19.5 x 6.75 in
Spare Wheel Size	N/A	Front Wheel Material	Steel
Rear Wheel Material	Steel	Spare Wheel Material	N/A
Front Bolt Pattern	8 Hole JIS 10.83"	Rear Bolt Pattern	8 Hole JIS 10.83
Spare Bolt Pattern	N/A		
steering			
Steering Type	Pwr	Steering Ratio (:1), On Center	16.6
Steering Ratio (:1), At Lock	19.6	Turning Diameter - Curb to Curb	41.2 ft
Turning Diameter - Wall to Wall	42.8 ft		
Brakes			
Brake Type	Pwr	Brake ABS System	4-Wheel
Brake ABS System (Second Line)	N/A	Disc - Front (Yes or)	Yes

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Chassis			
Brakes			
Disc - Rear (Yes or)	Yes	Front Brake Rotor Diam x Thickness	15.375 x 1.625 in
Rear Brake Rotor Diam x Thickness	15.375 x 1.625 in	Drum - Front (Yes or)	N/A
Front Drum Diam x Width	N/A	Drum - Rear (Yes or)	N/A
Rear Drum Diam x Width	N/A		
Fuel Tank			
Fuel Tank Capacity, Approx	40 gal	Aux Fuel Tank Capacity, Approx	N/A
Fuel Tank Location	Behind Rear Axle	Aux Fuel Tank Location	N/A
Trailering			
Trailer Weight	0.0 lbs		
imensions			
Interior Dimensions			
Passenger Capacity	3	Front Head Room	42.8 in
Front Leg Room	45.28 in	Front Shoulder Room	66.02 in
Front Hip Room	60.75 in		
Exterior Dimensions			
Wheelbase	141 in	Length, Overall w/o rear bumper	N/A
Length, Overall	224.4 in	Width, Max w/o mirrors	92.7 in
Height, Overall	82.95 in	Overhang, Front	34.4 in
Overhang, Rear w/o bumper	49 in	Front Bumper to Back of Cab	115.47 in
Cab to Axle	60 in	Cab to End of Frame	109.1 in
Ground to Top of Load Floor	N/A	Ground to Top of Frame	N/A
Frame Width, Rear	34.1 in	Ground Clearance, Front	N/A
Ground Clearance, Rear	N/A	Body Length	0.0 ft
Cab to Body	3.0 in	Frontal Area	ft²

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Medium Duty

ront Axle %	64.32
er Weight	350.0 lbs
ar Ground Load	2803.00 lbs
nd gear High Speed (High Axle Gear)	36.84 MPH
th gear High Speed (High Axle Gear)	66.31 MPH
oth gear High Speed (High Axle Gear)	108.71 MPH
2nd gear Low Speed (High Axle Gear)	20.33 MPH
4th gear Low Speed (High Axle Gear)	36.59 MPH
Sth gear Low Speed (High Axle Gear)	59.98 MPH
nd gear High Speed (Low Axle Gear)	N/A
Ith gear High Speed (Low Axle Gear)	N/A
Sth gear High Speed (Low Axle Gear)	N/A
2nd gear Low Speed (Low Axle Gear)	N/A
Ith gear Low Speed (Low Axle Gear)	N/A
6th gear Low Speed (Low Axle Gear)	N/A
orque @ Clutch Engage	N/A
st Gear Tractive Effort (High Axle Gear)	5921.84
rd Gear Tractive Effort (High Axle Gear)	2674.38
th Gear Tractive Effort (High Axle Gear)	1337.19
st Gear Tractive Effort (Low Axle Gear)	N/A
rd Gear Tractive Effort (Low Axle Gear)	N/A
th Gear Tractive Effort (Low Axle Gear)	N/A
st Gear Gradeability (High Axle Gear)	29.77
rd Gear Gradeability (High Axle Gear)	11.47
h Gear Gradeability (High Axle Gear)	-0.74
st Gear Gradeability (Low Axle Gear)	54.98
Brd Gear Gradeability (Low Axle Gear)	24.01
oth Gear Gradeability (Low Axle Gear)	9.78
eared Road Speed	108.71 MPH

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Medium Duty

Medium Duty Performance	Medium	า Dutv	Performance
-------------------------	--------	--------	-------------

Grade (%) 2.0	Maximum Speed Gradeability	MPH 15.48% @ 2539
Grade (%) 2.0	Maximum Speed Gradeability	15 /18% @ 2530
		RPM @ 79 MPH
Torque Converter 1.764	Maximum Capacity @ 0° F	2200.00
% of Body on Front Axle 40.43	% of Body on Rear Axle	59.57
Body Weight Front 0.00 lbs	Body Weight Rear	0.00 lbs
Actual Loaded Speed (First Part, MPH) 66.3 MPH	Actual Loaded Speed (Second Part, RPM)	2900
Actual Loaded Speed (Third Part, Gear) 4	Road Type	Concrete
Body Weight 0.0 lbs	Driver Weight Front	350.00 lbs
Driver Weight Rear 0.00 lbs	Medium Duty Body Type	None
Front Total Load 5054.00 lb	Rear Total Load	2803.00 lbs


This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Weight Distribution

SPECIFICATION SUMMARY	
Model #	CC56403
Truck/Tractor	
Wheelbase (WB)	141 in
Cab to Axle (CA)	60 in
Cab to Body/Swing Clear (BOC)	3.0 in
Body Length	0.0 ft
Body Weight	0.0 lbs
Cargo Weight	0.00 lbs
Front GAWR	7000 lbs
Rear GAWR	11000 lbs
GVWR	18000.00 lbs

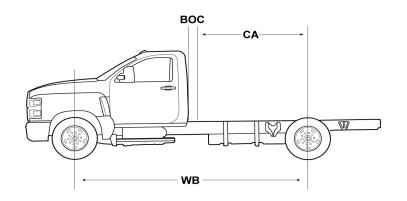

CA: 60 in BOC: 3.0 in

WB: 141 in

Fr%: 64.32

Rr%: 35.68

Front Wt: 5054.00 lbs

Rear Wt: 2803.00 lbs

GAWR/GVWR	GVW	Remaining Payload Wt
18000.00 lbs	7857.00 lbs	10,143.00 lbs

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.

Oct 5, 2022





Weight Distribution

SPECIFICATION DETAILS			
	Front Axle	Rear Axle	Total
Actual			
Chassis	4704.00 lbs	2803.00 lbs	7507.00 lbs
Body	0.00 lbs	0.00 lbs	0.0 lbs
Payload	0.00 lbs	0.00 lbs	0.00 lbs
Trailer			0.0 lbs
Totals	5054.00 lbs	2803.00 lbs	7857.00 lbs
Capacity			
Axle	7000 lbs	11000 lbs	18000.00 lbs
Suspension	7000 lbs	11000 lbs	18,000.00 lbs
Tire	7940 lbs	15000 lbs	22940.00
Total Axle Rating	7000.00 lbs	11000.00 lbs	18000.00 lbs

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Selected Model and Options

MODEL				
CODE	MODEL			MSRP
CC56403	2023 Chevrolet Silverado MD 2WD Reg Cab Work Truck			\$56,105.00
COLORS				
CODE	DESCRIPTION			
G7C	Red Hot			
MODEL OPTION				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
R7N	5500 HD Series (Included and only available with (GZX) 17,500 lb. GVWR, (GZJ) 18,000 lb. GVWR or (GZG) 19,500 lb. GVWR.)	0.00 lbs	0.00 lbs	Inc.
GVWR				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
GZJ	GVWR, 18,000 lb. (8165 kg) (Silverado 5500 HD 2WD Regular Cab models require one of the following combinations: (1) (FTC) 6.25k front axle and (FTW) 6.25k front suspension and one of the following rear axles: (HD2) 13.5k rear axle, (HD1) 15k rear axle or (J27) 15.5k rear axle and (GR4) 13.5k rear suspension. (2) (FTA) 7k front axle and (FK6) 7k front suspension and (GL4) 11k rear axle and (GR3) 11k rear suspension or (G40) 12k Rear air suspension. (3) (FTA) 7k front axle and (FK6) 7k front suspension and (HD2) 13.5k rear axle and one of the following rear suspensions: (GR4) 13.5k rear suspension, (G40) 12k Rear air suspension, (GP1) 13.5k Rear air suspension or (91C) 13.5k LiquidSpring prep single volume rear suspension. (4) (FTA) 7k front axle and (FK6) 7k front suspension and (HD1) 15k rear axle or (J27) 15.5k rear axle and one of the following rear suspensions: (GR4) 13.5k rear suspension, (FU7) 15.5k rear suspension, (GP1) 13.5K rear air suspension, (GP8) 15.5k rear air suspension, (91B) 13.5k LiquidSpring prep single volume rear suspension, (91C) 13.5k LiquidSpring prep stacked volume rear suspension, (91D) 15.5k LiquidSpring prep single volume rear suspension or (91E)	0.00 lbs	0.00 lbs	\$1,100.00

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

15.5k LiquidSpring prep stacked volume rear suspension.)

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



REQUIRED OPTIO	N			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
R6G	26,000 lb. GCWR (11,793 kg) (Requires 26k GCWR transmission (MWA, MWB, MIU, MIA, MH1, MG0, MIX, MF0, MA6 or MB6).)	0.00 lbs	0.00 lbs	\$0.00
ENGINE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
L5D	Engine, Duramax 6.6L Turbo-Diesel V8, B20-Diesel compatible 350 hp @ 2700 rpm, 700 lbft. torque @ 1600 rpm (STD)	0.00 lbs	0.00 lbs	\$0.00
POWER TAKE OF	=			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
PTX	Power Take-Off (PTO), not installed	0.00 lbs	0.00 lbs	\$0.00
TRANSMISSION				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
MWA	Highway Service Transmission, Automatic close-ratio 6 SPD with double overdrive, Allison, A1700HS ratios: 3.10 1ST, 1.80 2ND, 1.40 3RD, 1.00 4TH, 0.70 5TH, 0.61 6TH Highway Series, 19.5K GVW & 26K GCW Max., requires PTX and park pawl. Available with GVWs less than or equal to 19.5K (Requires (C7Y) 14,001 lb. GVWR, (C5B) 15,000 lb. GVWR, (C7P) 16,000 lb. GVWR, (C7R) 16,500 lb. GVWR, (GZX) 17,500 lb. GVWR, (GZJ) 18,000 lb. GVWR or (GZG) 19,500 lb. GVWR. Requires (R6G) 26,000 lb. GCWR (11,793 kg).) (STD)	0.00 lbs	0.00 lbs	\$0.00
AXLE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP

0.00 lbs

0.00 lbs

\$0.00

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.

Rear axle, 4.10 ratio Max road speed: 79 MPH

066

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



FRONT AXLE					
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP	
FTA	Front axle, 7,000 lb., Dana Spicer D800-N, "I"-beam, non-driving (Requires (FK6) 7,000 lb. (3,175 kg) front suspension. Requires (PCJ) Vocational Specific Heavy Suspension Package when ordered with (FQT) 141" Wheelbase or (ED9) 165" Wheelbase.)	0.00 lbs	0.00 lbs	\$0.00	
FRONT SUSPEN	SION				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP	
FK6	Front suspension, 7,000 lb. (3,175 kg) multi-leaf, includes shock absorbers	0.00 lbs	0.00 lbs	\$0.00	
REAR AXLE					
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP	
GL4	Rear axle, 11,000 lb. (4,999 kg) Dana Spicer S14-110, single reduction	0.00 lbs	0.00 lbs	\$0.00	
REAR SUSPENS	REAR SUSPENSION				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP	
GR3	Rear suspension, 11,000 lb. (4,990 kg) multi-leaf, vari-rate (Not available with air suspension.) (STD)	0.00 lbs	0.00 lbs	\$0.00	
WHEELBASE					
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP	
FQT	Wheelbase, 141" (358.1 cm), 60" CA (Requires (F0C) 49" axle to end of frame, (F0D) 63" axle to end of frame or (F0K) 91" axle to end of frame and (NPR) exhaust. Requires (PCJ) Vocational Specific Heavy Suspension Package, when ordering (FTA) 7,000 lb. Front axle/(FK6) 7,000 lb. Front suspension or (FTL) 8,000 lb. Front axle/(FSN) 8,000 lb. Front suspension and/or (FU7) 15,500 lb. rear suspension. Not available with rear air suspensions or (91B), (91C), (91D) or (91E) prep for LiquidSpring rear suspension.) (STD)	0.00 lbs	0.00 lbs	\$0.00	

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



PREFERRED EQ	UIPMENT GROUP			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
1WT	Work Truck Preferred Equipment Group includes standard equipment	0.00 lbs	0.00 lbs	\$0.00
WHEEL TYPE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
PWQ	Wheels, 19.5" x 6.75", steel, Black painted, 8-holes, hub piloted (STD)	0.00 lbs	0.00 lbs	\$0.00
FRONT TIRES				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
XDK	Tires, front 225/70R19.5G highway blackwall Goodyear Max Axle Load: 7,940 lb. (Requires (YAL) Tires, rear 225/70R19.5G highway blackwall Goodyear, Max Axle Load: 15,000 lb. or (YMF) Tires, rear 225/70R19.5G traction blackwall Goodyear, Max Axle Load: 15,000 lb.) (STD)	0.00 lbs	0.00 lbs	\$0.00
REAR TIRES				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
YAL	Tires, rear 225/70R19.5G highway blackwall Goodyear Max Axle Load: 15,000 lb. (STD)	0.00 lbs	0.00 lbs	\$0.00
SPARE TIRE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
9L3	Spare tire delete (STD)	0.00 lbs	0.00 lbs	\$0.00
PAINT SCHEME				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
ZY1	Paint, solid	0.00 lbs	0.00 lbs	\$0.00

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



AINT				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
G7C	Red Hot	0.00 lbs	0.00 lbs	\$0.00
EAT TYPE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
AE7	Seats, front 40/20/40 split-bench, 3-passenger driver and front passenger recline with outboard head restraints and center fold-down armrest with storage. Vinyl has fixed lumbar and cloth has manually adjustable driver lumbar. (STD)	0.00 lbs	0.00 lbs	\$0.00
EAT TRIM				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
H2Q	Dark Ash seats with Jet Black interior accents, Vinyl seat trim	0.00 lbs	0.00 lbs	\$0.00
ADIO				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
IO3	Audio system, 4.2" diagonal color display AM/FM stereo with USB port and auxiliary jack (Requires (AE7) front 40/20/40 split-bench seat. Not available with (UE1) OnStar or (U2K) SiriusXM Radio.) (STD)	0.00 lbs	0.00 lbs	\$0.00
DDITIONAL EC	QUIPMENT - PACKAGE			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
PCJ	Vocational Specific Heavy Suspension Package For 141" or 165" WB trucks only. Allows the selection of 7,000 lb., 8,000 lb., front axles and/or 15,500 lb. rear spring suspension on trucks that will be upfitted with the following vocational bodies: Utility/Service Bodies, Aerial Lift/Bucket bodies, Front Plow/Rear Spreader Applications, and Landscape Dump Bodies. (Required with (FQT) 141" Wheelbase or (ED9) 165" Wheelbase and (FTA) 7,000 lb. Front axle/(FK6) 7,000 lb. Front suspension or (FTL) 8,000 lb. Front axle/(FSN) 8,000 lb. Front suspension and/or (FU7) 15,500	0.00 lbs	0.00 lbs	\$0.00
	lbs. rear suspension.)			
		0.00 lbs	0.00 lbs	\$1,100.0

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Standard Equipment

Mechanical	
	GVWR, 16,500 lb. (7484 kg) (Silverado 4500 HD 2WD Regular Cab models require one of the following combinations: (1) (FTC) 6.25k front axle and (FTW) 6.25k front suspension and (GL4) 11k rear axle and (GR3) 11k rear suspension. (2) (FTC) 6.25k front axle and (FTW) 6.25k front suspension and one of the following rear axles: (HD2) 13.5k rear axle, (HD1) 15k rear axle or (J27) 15.5k rear axle and (GR4) 13.5k rear suspension. (3) (FTA) 7k front axle and (FK6) 7k front suspension and (FN1) 10k rear axle or (GL4) 11k rear axle and (GR3) 11k rear suspension or (G40) 12K Rear air suspension. (4) (FTA) 7k front axle and (FK6) 7k front suspension and (HD1) 15k rear axle or (J27) 15.5k rear axle and one of the following rear suspensions: (GR4) 13.5k rear suspension, (FU7) 15.5k rear suspension, (GP1) 13.5K rear air suspension, (GP8) 15.5k rear air suspension, (91B) 13.5k LiquidSpring prep single volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension.) (STD)
	Emissions, 50 state certification
	Emissions, USA 50 State certified
	Engine, Duramax 6.6L Turbo-Diesel V8, B20-Diesel compatible 350 hp @ 2700 rpm, 700 lbft. torque @ 1600 rpm (STD)
	Highway Service Transmission, Automatic close-ratio 6 SPD with double overdrive, Allison, A1700HS ratios: 3.10 1ST, 1.80 2ND, 1.40 3RD, 1.00 4TH, 0.70 5TH, 0.61 6TH Highway Series, 19.5K GVW & 26K GCW Max., requires PTX and park pawl. Available with GVWs less than or equal to 19.5K (Requires (C7Y) 14,001 lb. GVWR, (C5B) 15,000 lb. GVWR, (C7P) 16,000 lb. GVWR, (C7R) 16,500 lb. GVWR, (GZX) 17,500 lb. GVWR, (GZJ) 18,000 lb. GVWR or (GZG) 19,500 lb. GVWR. Requires (R6G) 26,000 lb. GCWR (11,793 kg).) (STD)
	Rear axle, 4.10 ratio Max road speed: 79 MPH
	Wheelbase, 141" (358.1 cm), 60" CA (Requires (F0C) 49" axle to end of frame, (F0D) 63" axle to end of frame or (F0K) 91" axle to end of frame and (NPR) exhaust. Requires (PCJ) Vocational Specific Heavy Suspension Package, when ordering (FTA) 7,000 lb. Front axle/(FK6) 7,000 lb. Front suspension or (FTL) 8,000 lb. Front axle/(FSN) 8,000 lb. Front suspension and/or (FU7) 15,500 lb. rear suspension. Not available with rear air suspensions or (91B), (91C), (91D) or (91E) prep for LiquidSpring rear suspension.) (STD)
	Front axle, 6,250 lb. (2,835 kg), Dana Spicer D800-N, "I"-beam, non-driving (Requires (FTW) 6,250 lb. front suspension. Includes (G68) rear shock absorbers. Not available with rear air suspensions.)
	Front suspension, 6,250 lb. (2,835 kg) multi-leaf, includes shock absorbers (Not available with rear air suspensions.) (STD)
	Rear axle, 11,000 lb. (4,999 kg) Dana Spicer S14-110, single reduction
	Rear suspension, 11,000 lb. (4,990 kg) multi-leaf, vari-rate (Not available with air suspension.) (STD)
	Neutral-at-Stop Automatic transmission shifts to neutral when the service brake is depressed while the vehicle is at a complete stop, and remains in neutral until the service brake is released
	Transmission shift control calibration, fuel sense Performance
	Rear wheel drive
	Batteries, heavy-duty dual 1100 cold-cranking amps includes battery box mounted to left side under cab
	Alternator, 150 amps

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Trailering provisions, trailering wire harness only, trailer combined (Stop/Tail/Turn) connection socket and harness mounted at rear of frame.
Trailer brake controller, integrated
Incomplete vehicle
Axle to End of Frame, 49" (Requires wheelbase (ED5) 201", (ED9) 165", (ER2) 189" or (FQT) 141". Not available with (G40), (GP1) or (GP8) rear air suspension.)
Axle, Open rear axle, non-locking rear
Axle lubricant, rear, synthetic oil EmGard FE -75W-90
Shock Absorbers, rear (Included with (FTC) 6,250 lb. front axle.)
Steering, power (Bosch S2 8014 Plus)
Brakes, hydraulic, heavy duty Bosch/Meritor/Wabco system with 4-channel (ABS) (Includes (J69) driveline park brake.)
Fuel tank, rear only, 40 gallon mounted between frame side rails and behind rear axle
Fuel, diesel B20
Capped Fuel Fill
Exhaust system, right side exit, behind rear wheels (Requires (FQT) 141" wheelbase.)
Exhaust brake
Wheels, 19.5" x 6.75", steel, Black painted, 8-holes, hub piloted (STD)
Tires, front 225/70R19.5G highway blackwall Goodyear Max Axle Load: 7,940 lb. (Requires (YAL) Tires, rear 225/70R19.5G highway blackwall Goodyear, Max Axle Load: 15,000 lb. or (YMF) Tires, rear 225/70R19.5G traction blackwall Goodyear, Max Axle Load: 15,000 lb.) (STD)
Tires, rear 225/70R19.5G highway blackwall Goodyear Max Axle Load: 15,000 lb. (STD)
Spare tire delete (STD)
Wheel, spare delete
Bumper, front, Black
Assist steps
Front fender extension, painted body color
Front fender extension, painted body color Grille, base, molded in color, Black
Grille, base, molded in color, Black
Grille, base, molded in color, Black Grille guard screen, insect protection (mounted behind grille)

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Exterior	
	Lamps, rear, stop/turn/backup (1-piece assembly) with license plate light
	Mirrors, outside high-visibility vertical camper-style, Black with manual folding and extension and lower convex spotter glass
	Glass, solar absorbing, tinted
	Antenna, fixed mast
	Door handles, Black
Entertainment	
	Audio system, 4.2" diagonal color display AM/FM stereo with USB port and auxiliary jack (Requires (AE7) front 40/20/40 split-bench seat. Not available with (UE1) OnStar or (U2K) SiriusXM Radio.) (STD)
	SiriusXM, delete
	Audio system feature, 4-speaker system
Interior	
	Seats, front 40/20/40 split-bench, 3-passenger driver and front passenger recline with outboard head restraints and center fold-down armrest with storage. Vinyl has fixed lumbar and cloth has manually adjustable driver lumbar. (STD)
	Interior trim, Jet Black/Dark Ash (Required and only available with (H2Q/H2R) Dark Ash seats with Jet Black interior accents.)
	Seat trim, Vinyl
	Seat Belt, Black
	Floor covering, Graphite-colored rubberized-vinyl
	Steering wheel, urethane
	Steering column, manual Tilt-Wheel
	Instrumentation, 6-gauge cluster featuring speedometer, fuel level, engine temperature, tachometer, voltage and oil pressure
	Speedometer, miles/kilometers
	Driver Information Center, 3.5-inch diagonal monochromatic display, provides warning messages and basic vehicle information
	Upfitter switch kit provides up to 4-30 amp circuits to facilitate installation of aftermarket electrical accessories located on the instrument panel
	Windows, manual driver and front passenger
	Door locks, power
	Cruise control, steering wheel-mounted
	Air conditioning, single-zone
	Mirror, inside rearview manual day/night

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Interior	
	Visors, driver and front passenger, vinyl
	Assist handle, front passenger and driver on A-pillars
Safety-Mechanical	
	Brake, parking, driveline park brake system
	StabiliTrak, Electronic Stability Control System with Traction Control includes Electronic Trailer Sway Control and Hill Start Assist
	Traction control
Safety-Exterior	
	Daytime Running Lamps, with automatic exterior lamp control
Safety-Interior	
	Airbags, Single-stage frontal airbags for driver and front outboard passenger; Seat-mounted side-impact airbags for driver and front outboard passenger; Head-curtain airbags for front outboard seating positions; Includes airbag deactivation switch for front outboard passenger airbag (Always use seat belts and child restraints. Children are safer when properly secured in a rear seat in the appropriate child restraint. See the Owner's Manual for more information.)
	Airbag deactivation switch, frontal passenger-side (Included and only available with (AY0) airbags.)
	OnStar, delete
	Rear Vision Camera, display integrated into Radio (Shipped loose in cab for upfitter installation.)
	Horn, single-note
WARRANTY	
	Warranty Note: <<< Preliminary 2023 Warranty >>> Basic Years: 3 Basic Miles/km: 36 000

Basic Miles/km: 36,000

Drivetrain Years (Allison Basic): 5

Drivetrain Years: 5

Drivetrain Miles/km (Allison Basic): Unlimited

Drivetrain Miles/km: 100,000 Drivetrain Note: Duramax Diesel Corrosion Years (Rust-Through): 6

Corrosion Years: 3

Corrosion Miles/km (Rust-Through): 100,000

Corrosion Miles/km: 36,000 Roadside Assistance Years: 5

Roadside Assistance Miles/km: 100,000 Maintenance Note: 1 Year/1 Visit

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Geared Road Speed


ODEOLEIO A TION OLIMAN DV	
SPECIFICATION SUMMARY	
Model #	CC56403
Engine Order Code	L5D
Model Manufacturer	Duramax
Туре	Turbocharged Diesel V8
Displacement	6.6L/402
Horsepower	350 @ 2700
Starting Torque	N/A
Transmission Order Code	MWA
Model Manufacturer	Allison
Туре	6-Speed Automatic
Rear Axle Order Code	GL4
Model Manufacturer	A1700HS Allison
Weight Rating	11000 lbs
Ratio:1	4.10
Rear Tires	225/70R19.5G
Revolutions/Mile Front	640
Revolutions/Mile Rear	640
Surface Type	Concrete
Desired Grade	2%

Geared Road Speed



0% Grade in 4th gear

Actual Loaded Speed

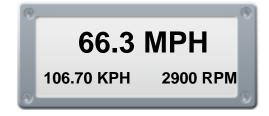

2% Grade in 4th gear

Note: Simulated speedometer appearance may not correspond with selected equipment.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Gradeability Chart

SPECIFICATION SUMMARY	
Model #	CC56403
Engine Order Code	L5D
Model Manufacturer	Duramax
Туре	Turbocharged Diesel V8
Displacement	6.6L/402
Horsepower	350 @ 2700
Starting Torque	N/A
Transmission Order Code	MWA
Model Manufacturer	Allison
Туре	6-Speed Automatic
Rear Axle Order Code	GL4
Model Manufacturer	A1700HS Allison
Weight Rating	11000 lbs
Ratio:1	4.10
Rear Tires	225/70R19.5G
Revolutions/Mile Front	640
Revolutions/Mile Rear	640
Surface Type	Concrete
Desired Grade	2%



This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.

Oct 5, 2022






Turning Circle

SPECIFICATION SUMMARY	
Model #	CC56403
Front Axle Order Code	FTA
Capacity (lbs)	7000 lbs
Wheelbase Order Code	FQT
Wheelbase (in)	141 in
Front Wheel Order Code	
Size/Type (in)	19.5 x 6.75 in
Front Tire Order Code	XDK
Size/Type	225/70R19.5G

Wall to Wall (ft): 42.8 ft

Wall to Wall diameter is measured from the outermost part of the cab.

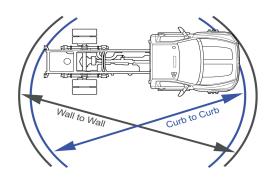

Curb to Curb (ft): 41.2 ft

Curb to Curb diameter is measured from the outside of the front tire.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.