





Technical Specifications

•			
Powertrain			
Transmission			
Drivetrain	Rear Wheel Drive	Trans Order Code	MWB
Trans Type	6	Trans Description Cont.	Automatic
Trans Description Cont. Again	N/A	First Gear Ratio (:1)	3.10
Second Gear Ratio (:1)	1.80	Third Gear Ratio (:1)	1.40
Fourth Gear Ratio (:1)	1.00	Fifth Gear Ratio (:1)	0.70
Sixth Gear Ratio (:1)	0.61	Reverse Ratio (:1)	N/A
Clutch Size	N/A	Trans Power Take Off	N/A
Final Drive Axle Ratio (:1)	N/A	Transfer Case Model	N/A
Transfer Case Power Take Off	N/A	Second Reverse Gear Ratio (:1)	N/A
Third Reverse Gear Ratio (:1)	N/A	Fourth Reverse Gear Ratio (:1)	N/A
Fifth Reverse Gear Ratio (:1)	N/A	Sixth Reverse Gear Ratio (:1)	N/A
Transmission Manufacturer	Allison	Transmission Type	A2700HS Allison
Engine			
Engine Order Code	L5D	Engine Type	Turbocharged Diesel V8
Displacement	6.6L/402	Fuel System	Direct Injection
SAE Net Horsepower @ RPM	350 @ 2700	SAE Net Torque @ RPM	700 @ 1600
Engine Oil Cooler	Yes	Governed Engine Speed (RPM)	2900
Engine Series	Duramax		
Electrical			
Cold Cranking Amps @ 0° F (Primary)	1100	Cold Cranking Amps @ 0° F (2nd)	1100
Cold Cranking Amps @ 0° F (3rd)	N/A	Maximum Alternator Capacity (amps)	150
Cooling System			
Total Cooling System Capacity	48 qts		

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Vehicle			
Vehicle			
Axle Ratio - Low Rear (:1)	N/A	As Spec Curb Weight - Front	5098.00 lbs
As Spec Curb Weight - Rear	3206.00 lbs		
Chassis			
Weight Information			
Standard Weight - Front	0.00 lbs	Standard Weight - Rear	0.00 lbs
Total Weight	8654.00 lbs	Gross Axle Wt Rating - Front	8000 lbs
Gross Axle Wt Rating - Rear	13500 lbs	Curb Weight - Front	5098 lbs
Curb Weight - Rear	3206 lbs	Option Weight - Front	0.00 lbs
Option Weight - Rear	0.00 lbs	Reserve Axle Capacity - Front	2552.00 lbs
Reserve Axle Capacity - Rear	10294.00 lbs	As Spec'd Curb Weight	8304.00 lbs
As Spec'd Payload	13196.00 lbs	Gross Combined Wt Rating	26000 lbs
Cargo Weight	0.00 lbs	Gross Vehicle Weight	8654.00 lbs
Axle Weight	8654.00 lbs	Gross Axle Weight Rating	21500.00 lbs
Curb Weight	8304.00 lbs	Reserve Axle Capacity	12846.00 lbs
Total Option Weight	0.00 lbs	Payload Weight Front	0.00 lbs
Payload Weight Rear	0.00 lbs	Maximum Axle Rating Front	7940.00 lbs
Maximum Axle Rating Rear	13500.00 lbs	Maximum Axle Rating Total	21500.00 lbs
Gross Vehicle Weight Rating	21500.00 lbs	Front PayLoad	350.00 lbs
Rear Payload	0.00 lbs	Total Payload Weight (Cargo + Driver + Body)	350.00 lbs
Frame			
Frame Type	High Strength Low Alloy Steel	Sect Modulus Rails Only	8.08 Front/10.93 Belly/8.47 Rear in ³
Frame RBM	404000 Front/546500 Belly/423500 Rear	Frame Strength	50000 lbs
Frame Thickness	0.3125 in		
Suspension			
Suspension Type - Front	Multi-Leaf	Suspension Type - Rear	Multi-Leaf

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



assis			
spension			
Spring Capacity - Front	8000 lbs	Spring Capacity - Rear	13500 lbs
Axle Type - Front	I-Beam	Axle Type - Rear	Single Reduction
Axle Capacity - Front	8000 lbs	Axle Capacity - Rear	13500 lbs
Axle Ratio (:1) - Front	N/A	Axle Ratio (:1) - Rear	4.10
Shock Absorber Diameter - Front	51 mm	Shock Absorber Diameter - Rear	N/A
Stabilizer Bar Diameter - Front	N/A	Stabilizer Bar Diameter - Rear	N/A
es			
Front Tire Order Code	XDK	Rear Tire Order Code	YAL
Spare Tire Order Code	N/A	Front Tire Size	225/70R19.5G
Rear Tire Size	225/70R19.5G	Spare Tire Size	N/A
Front Tire Capacity	7940 lbs	Rear Tire Capacity	15000 lbs
Spare Tire Capacity	N/A	Revolutions/Mile @ 45 mph - Front	640
Revolutions/Mile @ 45 mph - Rear	640	Revolutions/Mile @ 45 mph - Spare	N/A
Tire Rating Total	22940.00		
neels			
Front Wheel Size	19.5 x 6.75 in	Rear Wheel Size	19.5 x 6.75 in
Spare Wheel Size	N/A	Front Wheel Material	Steel
Rear Wheel Material	Steel	Spare Wheel Material	N/A
Front Bolt Pattern	8 Hole JIS 10.83"	Rear Bolt Pattern	8 Hole JIS 10.8
Spare Bolt Pattern	N/A		
eering			
Steering Type	Pwr	Steering Ratio (:1), On Center	16.6
Steering Ratio (:1), At Lock	19.6	Turning Diameter - Curb to Curb	49.7 ft
Turning Diameter - Wall to Wall	51.3 ft		
akes			
Brake Type	Pwr	Brake ABS System	4-Wheel
Brake ABS System (Second Line)	N/A	Disc - Front (Yes or)	Yes

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



4		
\checkmark	Complete	1

Chassis			
Brakes			
Disc - Rear (Yes or)	Yes	Front Brake Rotor Diam x Thickness	15.375 x 1.625 in
Rear Brake Rotor Diam x Thickness	15.375 x 1.625 in	Drum - Front (Yes or)	N/A
Front Drum Diam x Width	N/A	Drum - Rear (Yes or)	N/A
Rear Drum Diam x Width	N/A		
Fuel Tank			
Fuel Tank Capacity, Approx	40 gal	Aux Fuel Tank Capacity, Approx	N/A
Fuel Tank Location	Behind Rear Axle	Aux Fuel Tank Location	N/A
Trailering			
Trailer Weight	0.0 lbs		
	0.0 ibs		
Dimensions			
Interior Dimensions			
Passenger Capacity	6	Front Head Room	42.8 in
Front Leg Room	45.28 in	Front Shoulder Room	64.84 in
Front Hip Room	60.75 in	Second Head Room	40.51 in
Second Leg Room	40.94 in	Second Shoulder Room	64.33 in
Second Hip Room	60.24 in		
Exterior Dimensions			
Wheelbase	175 in	Length, Overall w/o rear bumper	N/A
Length, Overall	258.7 in	Width, Max w/o mirrors	92.7 in
Height, Overall	83.04 in	Overhang, Front	34.4 in
Overhang, Rear w/o bumper	49 in	Front Bumper to Back of Cab	149.48 in
Cab to Axle	60 in	Cab to End of Frame	109.2 in
Ground to Top of Load Floor	N/A	Ground to Top of Frame	N/A
Frame Width, Rear	34.1 in	Ground Clearance, Front	N/A
Ground Clearance, Rear	N/A	Body Length	0.0 ft
Cab to Body	3.0 in	Frontal Area	ft²

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Medium Duty

dium Duty Performance	
ont Axle %	62.95
river Weight	350.0 lbs
Rear Ground Load	3206.00 lbs
d gear High Speed (High Axle Gear)	36.84 MPH
h gear High Speed (High Axle Gear)	66.31 MPH
h gear High Speed (High Axle Gear)	108.71 MPH
nd gear Low Speed (High Axle Gear)	20.33 MPH
th gear Low Speed (High Axle Gear)	36.59 MPH
n gear Low Speed (High Axle Gear)	59.98 MPH
nd gear High Speed (Low Axle Gear)	N/A
n gear High Speed (Low Axle Gear)	N/A
h gear High Speed (Low Axle Gear)	N/A
nd gear Low Speed (Low Axle Gear)	N/A
th gear Low Speed (Low Axle Gear)	N/A
th gear Low Speed (Low Axle Gear)	N/A
rque @ Clutch Engage	N/A
t Gear Tractive Effort (High Axle Gear)	5921.84
Gear Tractive Effort (High Axle Gear)	2674.38
h Gear Tractive Effort (High Axle Gear)	1337.19
t Gear Tractive Effort (Low Axle Gear)	N/A
d Gear Tractive Effort (Low Axle Gear)	N/A
n Gear Tractive Effort (Low Axle Gear)	N/A
t Gear Gradeability (High Axle Gear)	24.83
d Gear Gradeability (High Axle Gear)	9.49
h Gear Gradeability (High Axle Gear)	-0.77
t Gear Gradeability (Low Axle Gear)	45.95
rd Gear Gradeability (Low Axle Gear)	20.00
h Gear Gradeability (Low Axle Gear)	8.07
eared Road Speed	108.71 MPH

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Medium Duty

Medium	Duty	Dorforr	nanco
wealum	Dutv	Pertorr	nance

			MPH
Grade (%)	2.0	Maximum Speed Gradeability	12.78% @ 25 RPM @ 79 N
Torque Converter	1.764	Maximum Capacity @ 0° F	2200.00
% of Body on Front Axle	32.57	% of Body on Rear Axle	67.43
Body Weight Front	0.00 lbs	Body Weight Rear	0.00 lbs
Actual Loaded Speed (First Part, MPH)	66.3 MPH	Actual Loaded Speed (Second Part, RPM)	2900
Actual Loaded Speed (Third Part, Gear)	4	Road Type	Concrete
Body Weight	0.0 lbs	Driver Weight Front	350.00 lbs
Driver Weight Rear	0.00 lbs	Medium Duty Body Type	None
Front Total Load	5448.00 lbs	Rear Total Load	3206.00 lbs


This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Weight Distribution

SPECIFICATION SUMMARY	
Model #	CC56043
Truck/Tractor	
Wheelbase (WB)	175 in
Cab to Axle (CA)	60 in
Cab to Body/Swing Clear (BOC)	3.0 in
Body Length	0.0 ft
Body Weight	0.0 lbs
Cargo Weight	0.00 lbs
Front GAWR	8000 lbs
Rear GAWR	13500 lbs
GVWR	21500.00 lbs

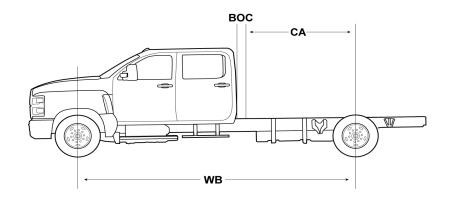

Fr%: 62.95

Rr%: 37.05

CA: 60 in BOC: 3.0 in WB: 175 in

Front Wt: 5448.00 lbs

Rear Wt: 3206.00 lbs

GAWR/GVWR	GVW	Remaining Payload Wt
21500.00 lbs	8654.00 lbs	12,846.00 lbs

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.

Oct 5, 2022



Weight Distribution

PECIFICATION DETAILS			
	Front Axle	Rear Axle	Total
Actual			
Chassis	5098.00 lbs	3206.00 lbs	8304.00 lbs
Body	0.00 lbs	0.00 lbs	0.0 lbs
Payload	0.00 lbs	0.00 lbs	0.00 lbs
Trailer			0.0 lbs
Totals	5448.00 lbs	3206.00 lbs	8654.00 lbs
Capacity			
Axle	8000 lbs	13500 lbs	21500.00 lbs
Suspension	8000 lbs	13500 lbs	21,500.00 lbs
Tire	7940 lbs	15000 lbs	22940.00
Total Axle Rating	7940.00 lbs	13500.00 lbs	21500.00 lbs

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Selected Model and Options

MODEL				
CODE	MODEL			MSRP
CC56043	2023 Chevrolet Silverado MD 2WD Crew Cab Work Truck			\$59,705.00
COLORS				
CODE	DESCRIPTION			
G7C	Red Hot			
MODEL OPTION				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
R7P	6500 HD Series (Included and only available with (GZH) 21,500 lb. GVWR, (C9U) 22,940 lb. GVWR or (DD7) 23,500 lb. GVWR.)	0.00 lbs	0.00 lbs	Inc.
GVWR				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
GZH	GVWR, 21,500 lb. (9752 kg) (Silverado 6500 HD 2WD models require one of the following combinations: (1) (FTA) 7k front axle and (FK6) 7k front suspension and (HD1) 15k rear axle or (J27) 15.5k rear axle and one of the following rear suspensions: (FU7) 15.5k rear suspension, (GP8) 15.5k rear air suspension, (91D) 15.5k LiquidSpring prep single volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension. (2) (FTL) 8k front axle and (FSN) 8k front suspension and (HD2) 13.5k rear axle and one of the following rear suspensions: (GR4) 13.5k rear suspension, (GP1) 13.5k Rear air suspension or (91C) 13.5k LiquidSpring prep single volume rear suspension. (3) (FTL) 8k front axle and (FSN) 8k front suspension and (HD1) 15k rear axle or (J27) 15.5k rear axle and one of the following rear suspensions: (GR4) 13.5k rear suspension, (FU7) 15.5k rear suspension, (GP1) 13.5k rear air suspension, (GP8) 15.5k rear air suspension, (91B) 13.5k LiquidSpring prep single volume rear suspension, (91C) 13.5k LiquidSpring prep single volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension.)	0.00 lbs	0.00 lbs	\$4,300.00

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



REQUIRED OPTIO	N			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
R6G	26,000 lb. GCWR (11,793 kg) (Requires 26k GCWR transmission (MWA, MWB, MIU, MIA, MH1, MG0, MIX, MF0, MA6 or MB6).)	0.00 lbs	0.00 lbs	\$0.00
ENGINE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
L5D	Engine, Duramax 6.6L Turbo-Diesel V8, B20-Diesel compatible 350 hp @ 2700 rpm, 700 lbft. torque @ 1600 rpm (STD)	0.00 lbs	0.00 lbs	\$0.00
POWER TAKE OF	F			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
PTX	Power Take-Off (PTO), not installed	0.00 lbs	0.00 lbs	\$0.00
TRANSMISSION				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
MWB	Highway Service Transmission, Automatic close-ratio 6 SPD with double overdrive, Allison, A2700HS ratios: 3.10 1ST, 1.80 2ND, 1.40 3RD, 1.00 4TH, 0.70 5TH, 0.61 6TH Highway Series, 26K GVW & 26K GCW Max., requires PTX and park pawl. Available with GVWs greater than 19.5K (Requires (GZH) 21,500 lb. GVWR, (C9U) 22,940 lb. GVWR or (DD7) 23,500 lb. GVWR. Requires (R6G) 26,000 lb. GCWR (11,793 kg).)	0.00 lbs	0.00 lbs	\$985.00
AXLE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
066	Rear axle, 4.10 ratio Max road speed: 79 MPH	0.00 lbs	0.00 lbs	\$0.00
FRONT AXLE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
FTL	Front axle, 8,000 lb., Dana/Spicer D800-N, "I"-beam, non-driving	0.00 lbs	0.00 lbs	\$500.00

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



FRONT SUSPEN	SION			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
FSN	Front suspension, 8,000 lb. (3,629 kg) multi-leaf, includes shock absorbers	0.00 lbs	0.00 lbs	\$100.00
REAR AXLE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
HD2	Rear axle, 13,500 lb. (6,124 kg) Dana Spicer S14-110, single reduction	0.00 lbs	0.00 lbs	\$355.00
REAR SUSPENS	ION			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
GR4	Rear suspension, 13,500 lb. (6,123 kg) multi-leaf, vari-rate (Not available with air suspension or (GL4) 11,000 lb. (4,999 kg) rear axle.)	0.00 lbs	0.00 lbs	\$25.00
WHEELBASE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
FNV	Wheelbase, 175" (444.5 cm), 60" CA (Requires (F0C) 49" axle to end of frame. Not available with (G40) 12,000 lb., (GP1) 13,500 lb. or (GP8) 15,500 lb. rear air suspension, or (NPK) Exhaust System.) (STD)	0.00 lbs	0.00 lbs	\$0.00
PREFERRED EQ	UIPMENT GROUP			
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
1WT	Work Truck Preferred Equipment Group includes standard equipment	0.00 lbs	0.00 lbs	\$0.00
WHEEL TYPE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
PWQ	Wheels, 19.5" x 6.75", steel, Black painted, 8-holes, hub piloted (STD)	0.00 lbs	0.00 lbs	\$0.00

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



FRONT TIRES				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
XDK	Tires, front 225/70R19.5G highway blackwall Goodyear Max Axle Load: 7,940 lb. (Requires (YAL) Tires, rear 225/70R19.5G highway blackwall Goodyear, Max Axle Load: 15,000 lb. or (YMF) Tires, rear 225/70R19.5G traction blackwall Goodyear, Max Axle Load: 15,000 lb.) (STD)	0.00 lbs	0.00 lbs	\$0.00
REAR TIRES				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
YAL	Tires, rear 225/70R19.5G highway blackwall Goodyear Max Axle Load: 15,000 lb. (STD)	0.00 lbs	0.00 lbs	\$0.00
SPARE TIRE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
9L3	Spare tire delete (STD)	0.00 lbs	0.00 lbs	\$0.00
PAINT SCHEME				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
ZY1	Paint, solid	0.00 lbs	0.00 lbs	\$0.00
PAINT				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
G7C	Red Hot	0.00 lbs	0.00 lbs	\$0.00
SEAT TYPE				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
AE7	Seats, front 40/20/40 split-bench, 3-passenger driver and front passenger recline with outboard head restraints and center fold-down armrest with storage. Vinyl has fixed lumbar and cloth has manually adjustable driver lumbar. (STD)	0.00 lbs	0.00 lbs	\$0.00

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



SEAT TRIM				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
H2Q	Dark Ash seats with Jet Black interior accents, Vinyl seat trim	0.00 lbs	0.00 lbs	\$0.00
RADIO				
CODE	DESCRIPTION	FRONT WEIGHT	REAR WEIGHT	MSRP
IO3	Audio system, 4.2" diagonal color display AM/FM stereo with USB port and auxiliary jack (Requires (AE7) front 40/20/40 split-bench seat. Not available with (UE1) OnStar or (U2K) SiriusXM Radio.) (STD)	0.00 lbs	0.00 lbs	\$0.00
	Options Total	0.00 lbs	0.00 lbs	\$6,265.00
	As Specified Curb Weight	5098.00 lbs	3206.00 lbs	

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Standard Equipment

Mechanical	
	GVWR, 16,500 lb. (7484 kg) (Silverado 4500 HD 2WD Crew Cab models require one of the following combinations: (1) (FTA) 7k front axle and (FK6) 7k front suspension and (FN1) 10k rear axle or (GL4) 11k rear axle and (GR3) 11k rear suspension or (G40) 12K Rear air suspension. (2) (FTA) 7k front axle and (FK6) 7k front suspension and (HD1) 15k rear axle or (J27) 15.5k rear axle and one of the following rear suspensions: (GR4) 13.5k rear suspension, (FU7) 15.5k rear suspension, (GP1) 13.5K rear air suspension, (GP8) 15.5k rear air suspension, (91B) 13.5k LiquidSpring prep single volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension.) (STD)
	Emissions, 50 state certification
	Emissions, USA 50 State certified
	Engine, Duramax 6.6L Turbo-Diesel V8, B20-Diesel compatible 350 hp @ 2700 rpm, 700 lbft. torque @ 1600 rpm (STD)
	Highway Service Transmission, Automatic close-ratio 6 SPD with double overdrive, Allison, A1700HS ratios: 3.10 1ST, 1.80 2ND, 1.40 3RD, 1.00 4TH, 0.70 5TH, 0.61 6TH Highway Series, 19.5K GVW & 26K GCW Max., requires PTX and park pawl. Available with GVWs less than or equal to 19.5K (Requires (C7Y) 14,001 lb. GVWR, (C5B) 15,000 lb. GVWR, (C7P) 16,000 lb. GVWR, (C7R) 16,500 lb. GVWR, (GZX) 17,500 lb. GVWR, (GZJ) 18,000 lb. GVWR or (GZG) 19,500 lb. GVWR. Requires (R6G) 26,000 lb. GCWR (11,793 kg).) (STD)
	Rear axle, 4.10 ratio Max road speed: 79 MPH
	Wheelbase, 175" (444.5 cm), 60" CA (Requires (F0C) 49" axle to end of frame. Not available with (G40) 12,000 lb., (GP1) 13,500 lb. or (GP8) 15,500 lb. rear air suspension, or (NPK) Exhaust System.) (STD)
	Front axle, 7,000 lb., Dana Spicer D800-N, "I"-beam, non-driving (Requires (FK6) 7,000 lb. (3,175 kg) front suspension.)
	Front suspension, 7,000 lb. (3,175 kg) multi-leaf, includes shock absorbers (STD)
	Rear axle, 10,000 lb. (4,536 kg) Dana Spicer S14-110, single reduction
	Rear suspension, 11,000 lb. (4,990 kg) multi-leaf, vari-rate (Not available with air suspension.) (STD)
	Neutral-at-Stop Automatic transmission shifts to neutral when the service brake is depressed while the vehicle is at a complete stop, and remains in neutral until the service brake is released
	Transmission shift control calibration, fuel sense Performance
	Rear wheel drive
	Batteries, heavy-duty dual 1100 cold-cranking amps includes battery box mounted to left side under cab
	Alternator, 150 amps
	Trailering provisions, trailering wire harness only, trailer combined (Stop/Tail/Turn) connection socket and harness mounted at rear of frame.
	Trailer brake controller, integrated
	Incomplete vehicle

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Mechanical	
Axle to End of Frame, 49" (Requires wheelbase (GP8) rear air suspension.)	(EM1) 199" or (FNV) 175". Not available with (G40), (GP1) or
Axle, Open rear axle, non-locking rear	
Axle lubricant, rear, synthetic oil EmGard FE -7	5W-90
Steering, power (Bosch S2 8014 Plus)	
Brakes, hydraulic, heavy duty Bosch/Meritor/Wabrake.)	abco system with 4-channel (ABS) (Includes (J69) driveline park
Fuel tank, rear only, 40 gallon mounted betwee	n frame side rails and behind rear axle
Fuel, diesel B20	
Capped Fuel Fill	
Exhaust system, rear exit	
Exhaust brake	
Exterior	
Wheels, 19.5" x 6.75", steel, Black painted, 8-h	oles, hub piloted (STD)
	oodyear Max Axle Load: 7,940 lb. (Requires (YAL) Tires, rear ax Axle Load: 15,000 lb. or (YMF) Tires, rear 225/70R19.5G i,000 lb.) (STD)
Tires, rear 225/70R19.5G highway blackwall Go	podyear Max Axle Load: 15,000 lb. (STD)
Spare tire delete (STD)	
Wheel, spare delete	
Bumper, front, Black	
Assist steps	
Front fender extension, painted body color	
Grille, base, molded in color, Black	
Grille guard screen, insect protection (mounted	behind grille)
Headlamps, halogen projector-beam	
Lamps, cargo area, cab mounted with switch or	center switch bank
Lamps, Smoked Amber roof marker	
Lamps, rear, stop/turn/backup (1-piece assemb	ly) with license plate light
Mirrors, outside high-visibility vertical camper-si spotter glass	yle, Black with manual folding and extension and lower convex
Glass, solar absorbing, tinted	

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Exterior	
	Door handles, Black
Entertainment	
	Audio system, 4.2" diagonal color display AM/FM stereo with USB port and auxiliary jack (Requires (AE7) front 40/20/40 split-bench seat. Not available with (UE1) OnStar or (U2K) SiriusXM Radio.) (STD)
	SiriusXM, delete
	6-speaker audio system
Interior	
	Seats, front 40/20/40 split-bench, 3-passenger driver and front passenger recline with outboard head restraints and center fold-down armrest with storage. Vinyl has fixed lumbar and cloth has manually adjustable driver lumbar. (STD)
	Interior trim, Jet Black/Dark Ash (Required and only available with (H2Q/H2R) Dark Ash seats with Jet Black interior accents.)
	Seat trim, Vinyl
	Seat, rear 60/40 folding bench (folds up), 3-passenger (includes child seat top tether anchor)
	Seat Belt, Black
	Floor covering, Graphite-colored rubberized-vinyl
	Steering wheel, urethane
	Steering column, manual Tilt-Wheel
	Instrumentation, 6-gauge cluster featuring speedometer, fuel level, engine temperature, tachometer, voltage and oil pressure
	Speedometer, miles/kilometers
	Driver Information Center, 3.5-inch diagonal monochromatic display, provides warning messages and basic vehicle information
	Upfitter switch kit provides up to 4-30 amp circuits to facilitate installation of aftermarket electrical accessories located on the instrument panel
	Windows, power with driver express up and down and express down on all other windows
	Door locks, power
	Cruise control, steering wheel-mounted
	Air conditioning, single-zone
	Mirror, inside rearview manual day/night
	Visors, driver and front passenger, vinyl
	Assist handle, front passenger and driver on A-pillars

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Saf	ety-	Mec	hani	ical
-----	------	-----	------	------

Brake, parking, driveline park brake system

StabiliTrak, Electronic Stability Control System with Traction Control includes Electronic Trailer Sway Control and Hill Start Assist

Traction control

Safety-Exterior

Daytime Running Lamps, with automatic exterior lamp control

Safety-Interior

Airbags, Single-stage frontal airbags for driver and front outboard passenger; Seat-mounted side-impact airbags for driver and front outboard passenger; Head-curtain airbags for front and rear outboard seating positions; (Always use seat belts and child restraints. Children are safer when properly secured in a rear seat in the appropriate child restraint. See the Owner's Manual for more information.)

Airbag deactivation switch, frontal passenger-side (Included and only available with (AY0) airbags.)

OnStar, delete

Rear Vision Camera, display integrated into Radio (Shipped loose in cab for upfitter installation.)

Horn, single-note

WARRANTY

Warranty Note: <<< Preliminary 2023 Warranty >>>

Basic Years: 3

Basic Miles/km: 36,000

Drivetrain Years (Allison Basic): 5

Drivetrain Years: 5

Drivetrain Miles/km (Allison Basic): Unlimited

Drivetrain Miles/km: 100,000 Drivetrain Note: Duramax Diesel Corrosion Years (Rust-Through): 6

Corrosion Years: 3

Corrosion Miles/km (Rust-Through): 100,000

Corrosion Miles/km: 36,000 Roadside Assistance Years: 5

Roadside Assistance Miles/km: 100,000 Maintenance Note: 1 Year/1 Visit

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided. Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Geared Road Speed


SPECIFICATION SUMMARY		
Model #	CC56043	
Engine Order Code	L5D	
Model Manufacturer	Duramax	
Туре	Turbocharged Diesel V8	
Displacement	6.6L/402	
Horsepower	350 @ 2700	
Starting Torque	N/A	
Transmission Order Code	MWB	
Model Manufacturer	Allison	
Туре	6-Speed Automatic	
Second Hip Room	60.24 in	
Rear Axle Order Code	HD2	
Model Manufacturer	A2700HS Allison	
Weight Rating	13500 lbs	
Ratio:1	4.10	
Rear Tires	225/70R19.5G	
Revolutions/Mile Front	640	
Revolutions/Mile Rear	640	
Surface Type	Concrete	
Desired Grade	2%	

Geared Road Speed



0% Grade in 4th gear

Actual Loaded Speed



2% Grade in 4th gear

Note: Simulated speedometer appearance may not correspond with selected equipment.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.



Gradeability Chart

SPECIFICATION SUMMARY		
Model #	CC56043	
Engine Order Code	L5D	
Model Manufacturer	Duramax	
Туре	Turbocharged Diesel V8	
Displacement	6.6L/402	
Horsepower	350 @ 2700	
Starting Torque	N/A	
Transmission Order Code	MWB	
Model Manufacturer	Allison	
Туре	6-Speed Automatic	
Second Hip Room	60.24 in	
Rear Axle Order Code	HD2	
Model Manufacturer	A2700HS Allison	
Weight Rating	13500 lbs	
Ratio:1	4.10	
Rear Tires	225/70R19.5G	
Revolutions/Mile Front	640	
Revolutions/Mile Rear	640	
Surface Type	Concrete	
Desired Grade	2%	



This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.

Oct 5, 2022






Turning Circle

SPECIFICATION SUMMARY		
Model #	CC56043	
Front Axle Order Code	FTL	
Capacity (lbs)	8000 lbs	
Wheelbase Order Code	FNV	
Wheelbase (in)	175 in	
Front Wheel Order Code		
Size/Type (in)	19.5 x 6.75 in	
Front Tire Order Code	XDK	
Size/Type	225/70R19.5G	

Wall to Wall (ft): 51.3 ft

Wall to Wall diameter is measured from the outermost part of the cab.



Curb to Curb (ft): 49.7 ft

Curb to Curb diameter is measured from the outside of the front tire.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17632. Data Updated: Oct 4, 2022 6:51:00 PM PDT.