

Technical sheet :

# 2550 RT

---




Capacities		Metric	Imperial
Tipping Load		3305 kg	7286 lbs
Operating Weight		5260 kg	11596 lbs
Operating Capacity at 35% Tipping Load		1157 kg	2551 lbs
Operating Capacity At 50% Tipping Load		1652 kg	3642 lbs
Weight and dimensions			
Overall Operating Height - Fully Raised	h27	4267 mm	167.992 in
Height to Hinge Pin - Fully Raised	h28	3251 mm	127.992 in
Reach - Fully Raised	dp1	876 mm	34.488 in
Dump angle at full height	a5	41 °	41 °
Dump Height - Fully Raised	h29	2489 mm	97.992 in
Maximum Rollback Angle - Fully Raised	a4	102.5	102.5
Overall Height to Top of Rops	h17	2111 mm	83.11 in
Overall length with bucket	l16	4008 mm	157.795 in
Departure angle	a2	25 °	25 °
Overall Length without Bucket	l1	3221 mm	126.811 in
Specified Height	h31	1720 mm	67.717 in
Reach at Specified Height	r4	795 mm	31.299 in
Dump angle at specified height	a17	66.8 °	66.8 °
Maximum Rollback Angle at Ground	a13	30	30
Carry Position	d5	208 mm	8.189 in
Maximum Rollback Angle at Carry Position	a14	31.6	31.6
Digging Position	h32	13 mm	0.512 in
Angle of Departure with STD Counterweight		25 °	25 °
Ground clearance	m4	313 mm	1026 ft 11 in
Track gauge	b10	1313 mm	51.693 in
Track Shoe Width	b20	450 mm	17.717 in
Crawler base	y2	1562 mm	61.496 in
Overall width less bucket	b1	1765 mm	69.488 in
Bucket Width	e1	2131 mm	83.898 in
Clearance Radius - Front with Bucket		2499 mm	98.386 in
Clearance Circle - Rear	wa1	1796 mm	70.709 in
Maximum rollback at specified height		66.8 °	66.8 °
Angle of Approach		90 °	90 °
Grouser Height		25 mm	0.984 in
Track Type / Track Rollers / Roller Type		Rubber / 5 / Steel	Rubber / 5 / Steel
Performances			
Ground Speed - Single Speed		8.5 km/h	5.3 mph
Ground Speed - Two Speed		12.1 km/h	7.5 mph
Drawbar Pull/Tractive Effort		5649 kg	12454 lbs
Bucket Breakout - Tilt Cylinder		3803 kg	8384 lbs
Bucket Breakout - Lift Cylinder		3373 kg	7436 lbs
Engine			
Engine brand		Deutz	Deutz
Engine model		TD 3.6 L4	TD 3.6 L4
Motor Type		Axial Piston Planetary Gear Box Reduction	Axial Piston Planetary Gear Box Reduction
Gross Power (kW) / Gross Power		55.4 kW / 2300 tr/min	55.4 kW / 2300 tr/min
Net Power (kW) / Net Power		52.7 kW / 2300 tr/min	52.7 kW / 2300 tr/min
Max. torque		330	330
Battery		12 V	12 V
Cold Cranking Amps at Temperature (CCA)		950	950
Alternator - Voltage / Ampere		12 V / 120 A	12 V / 120 A
Hydraulics			
Auxiliary hydraulics		110 l/min	110 l/min
Tank capacities			
Oil Pan Capacity		8.5 l	1.87 gal
Hydraulic tank capacity		52.2 l	11.48 gal
Fuel tank		121.1 l	26.64 gal
Coolant Capacity		23.1 l	5.08 gal
Displacement / Number of cylinders		3.6 l / 4	0.79 gal / 4
Noise and vibration			

<b>Noise and vibration</b>			
Environmental noise (LwA)		106.1 dB(A)	106.1 dB(A)
Noise at driving position (LpA)		85.8 dB(A)	85.8 dB(A)
<b>Miscellaneous</b>			
Ground Pressure		0 Bar	0 PSI

## Equipment

<b>Comfort</b>	
Air suspension seat	Optional
<b>Electrical System</b>	
Back-Up Alarm	Standard
Combination Radiator & Hydraulic Oil Cooler	Standard
Counterweight	Standard
<b>Electricity / Safety</b>	
High-Flow Auxiliary Hydraulics	Optional
<b>Hydraulics</b>	
Auxiliary Hydraulics	Standard
<b>Operators Station</b>	
Dual-Element Air Cleaner with Indicator	Standard
Engine Auto-Shutdown System	Standard
ROPS/FOPS Level II Overhead Guard	Standard
<b>Performance</b>	
Electro-Hydraulic Joystick Controls	Standard
Electronic Attachment Control - 14-Pin Connector	Optional
<b>Structure</b>	
All-Tach® Attachment Mounting System	Standard
Power-A-Tach® Attachment Mounting System	Optional
Selectable Self-Leveling Hydraulic Lift Action 4	Optional
Two-Speed Hydrostatic Drive System	Standard
<b>Undercarriage</b>	
Elevated Planetary Final Drives	Standard

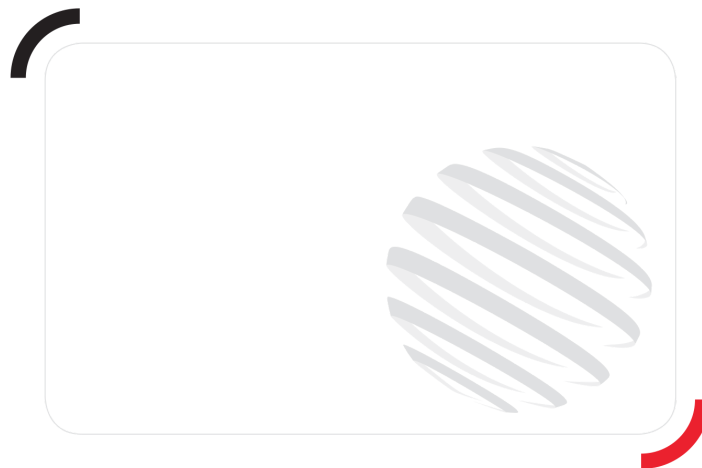

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508  
RCS Nantes