

Dynapac CC1200C VI

Combi rollers



Technical data



Masses

Max. operating mass	6,800 lbs
Operating mass (incl. ROPS)	5,100 lbs
Module mass (front/rear)	2,700 lbs/2,400 lbs



Propulsion

Speed range	0-10 km/h
Vertical oscillation	±10°
Theor. gradeability	65 %



Compaction

Wheel load	271 kg/wheel
Tire type (smooth)	9.5/65-15.6
Centrifugal force	34/29 kN
Nominal amplitude	0.020 in
Static linear load	58 lbs/in
Vibration frequency	66/61 Hz
Water tank	49 gal
Emulsion tank	5.28 gal



Engine

Manufacturer/Model	Kubota D1703-M (IIIA/T4i)
Type	Water cooled
Rated power, SAE J1995	35.0 hp @ 2,800 rpm
Fuel tank capacity	12 gal



Engine

Manufacturer/Model	Kubota D1703-DI (T4f)
Type	Water cooled
Rated power, SAE J1995	18.5 kW (25 hp) @ 2,200 rpm



Engine

Manufacturer/Model	Kubota D1803-CR (T4f)
Type	Water cooled
Rated power, SAE J1995	28 kW (37.5 hp) @ 2,700 rpm



Hydraulic system

Driving	Axial piston pump with variable displacement. Radial piston motors with constant displacement.
Vibration	Gear pump/motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake on drum and wheels.

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.



dynapac_cc1200c_vi_us-20180702.115424.pdf 2018-07-02 11:54

Dynapac CC1200C VI

Combi rollers



Technical data

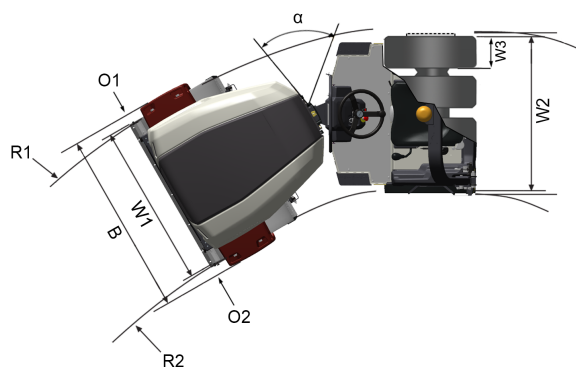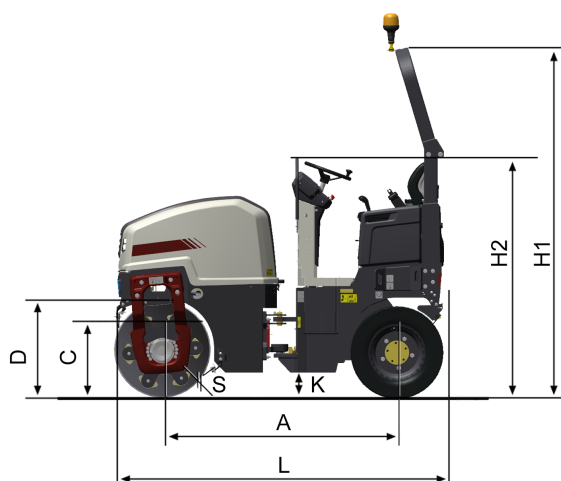

Dimensions	
A. Wheelbase	67 in
B. Width	53 in
C. Curb clearance	22 in
D. Drum diameter	28 in
H1. Height, with ROPS	100 in
H2. Height, w/o ROPS/cab	69 in
K. Ground clearance	7 in
L. Length	94 in
O1. Overhang, right	3 in
O2. Overhang, left	3 in
R1. Turning radius, outside	12 ft
R2. Turning radius, inside	8 ft
S. Drum shell thickness	0.5 in
W1. Drum width	47 in
W2. Width, wheel module	44.88 in
W3. Width, tire	244 mm
α . Steering angle	$\pm 30^\circ$

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac_cc1200c_vi_us-20180702.115424.pdf 2018-07-02 11:54