

Dynapac CC4200C VI

Combi rollers

DYNAPAC



Technical data



Masses

Max. operating mass	24,300 lbs
Operating mass (incl. ROPS)	20,700 lbs
Module mass (front/rear)	11,000 lbs/9,700 lbs



Propulsion

Speed range	0-7.5 mph
Vertical oscillation	±7°
Theor. gradeability	41 %



Compaction

Wheel load	2,425 lbs/wheel
Centrifugal force (high/low amplitude)	28,780/18,880 lb
Nominal amplitude (high/low)	0.031/0.012 in
Static linear load	167 lbs/in
Vibration frequency (high/low amplitude)	3,060/4,020 vpm
Water tank	180 gal
Emulsion tank	53 gal
Water tank (front drum steering)	143 gal



Engine

Manufacturer/Model	Cummins QSF3.8 IV/T4f
Type	Water cooled turbo Diesel with After Cooler
Rated power, SAE J1995	97 kW (130 hp) @ 2,200 rpm
Fuel tank capacity	48 gal
DEF tank capacity	4 gal



Engine

Manufacturer/Model	Cummins QSF3.8 IIIA/T3
Type	Water cooled turbo Diesel with After Cooler
Rated power, SAE J1995	104 kW (140 hp) @ 2,200 rpm
Fuel tank capacity	48 gal



Hydraulic system

Driving	Axial piston pump with variable displacement. Radial piston motors (3) with variable displacement.
Vibration	Axial piston pump with variable displacement. Axial piston motor with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe multidisc brake in drum and wheel motors.

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.



dynapac_cc4200c_vi_us-20171218.082121.pdf 2017-12-18 08:21

Dynapac CC4200C VI

Combi rollers

DYNAPAC

Technical data

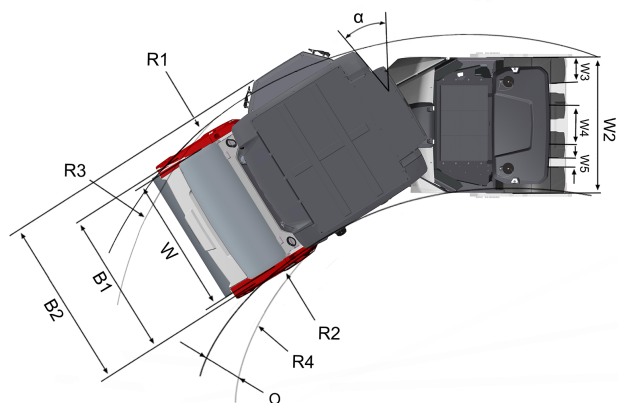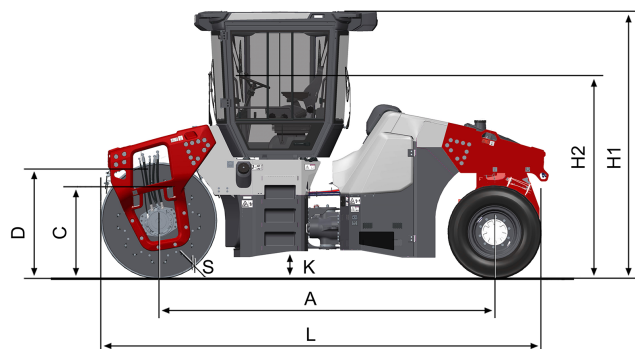

Dimensions	
A. Wheelbase	146 in
B1. Width, front	75 in
B2. Width, with cab	84 in
C. Curb clearance	32 in
D. Drum diameter	51 in
H1. Height, with ROPS/cab	118 in
K. Ground clearance	12.2 in
L. Length	197 in
O. Off-set	20.5 in
R1. Turning radius, outside	286 in
R2. Turning radius, inside	220 in
R3. Turning radius with off-set, outside	215 in
R4. Turning radius with off-set, inside	149 in
S. Drum shell thickness	0.79 in
W1. Drum width	66 in
W2. Width, wheel module	63 in
W3. Width, tire	12.7 in
W4. Wheel track	18.3 in
W5. Wheel spacing	5.0 in
α. Steering angle	±32°

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac_cc4200c_vi_us-20171218.082121.pdf 2017-12-18 08:21