



Dynapac CC950


Double drum vibratory rollers





Technical data

 Masses	
Max. operating mass	3,100 lbs
Operating mass (incl. ROPS)	3,000 lbs
Module mass (front/rear)	1,400 lbs/1,600 lbs

 Propulsion	
Speed range	0-5 mph
Vertical oscillation	±13°
Theor. gradeability	35 %

 Compaction	
Centrifugal force	3,800 lb
Nominal amplitude	0.016 in
Static linear load (front/rear)	40 /44 lbs/in
Vibration frequency	4,200 vpm
Water tank	50 gal

 Engine	
Manufacturer/Model	Kubota D722-E4B
Type	Vertical, water-cooled, 4-cycle IDI diesel engine
Rated power, SAE J1995	20.3 hp @ 3,600 rpm
Fuel tank capacity	6 gal

 Hydraulic system	
Driving	Axial piston pump with variable displacement. 2 radial piston motors with constant displacement.
Vibration	Gear pump/motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe brake in both drums.

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.



dynapac_cc950_us-20200622.111506.pdf 2020-06-22 11:15

Dynapac CC950

Double drum vibratory rollers



Technical data

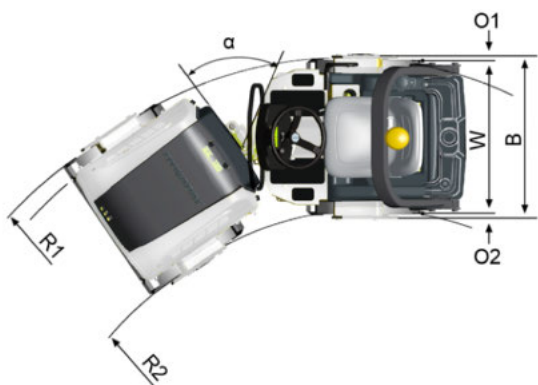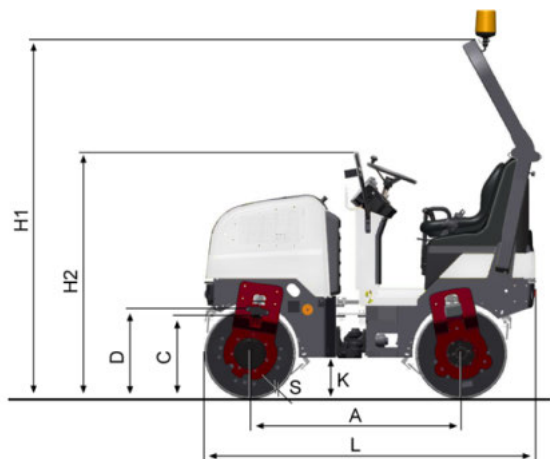

Dimensions

A. Wheelbase	53 in
B. Width	38 in
C. Curb clearance	18 in
D. Drum diameter	23 in
H1. Height, with ROPS/cab	91 in
H2. Height, w/o ROPS/cab	62 in
K. Ground clearance	10 in
L. Length	83 in
L1. Length	83 in
O1. Overhang, right	1 in
O2. Overhang, left	1 in
R1. Turning radius, outside	9 ft
R2. Turning radius, inside	6 ft
S. Drum shell thickness	0.4 in
W. Working width	35 in
α. Steering angle	±34°



Standard equipment

Emergency stop, Horn, Hour meter, Ignition key, Warninglight for brakes,
Warning light for hydraulic oil temp
Foldable ROPS (incl. seat belt), Seat safety switch, Sliding operator seat
Propulsion in both drums
Vibration on front drum
Towing eyelet (front/rear)
Pressurized water system
Spring loaded scrapers

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

dynapac_cc950_us-20200622.111506.pdf 2020-06-22 11:15