
# **GAS BOTTLE SERIES**

The BMR-CS Series



### **Optional Features**

- Rollers or Slide Pads
- Dual Pump & Motor
- Power Down on Demand
- Auxiliary Controls System
- Hand-Held Remote Control
- Conspicuity Tape
- Pump Pressure Gauge
- Cab Cut Off Switch

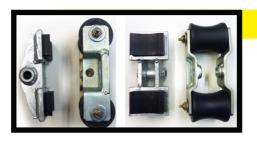


#### **Rollers OR Slide Pads**

As an industry first, the BMR is available with rollers or slide pads

### **New Switch Location**

Control switch is located on the column and now features an optional power down on demand button

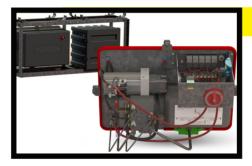

# New Pump Box / Hydraulic Design

Pump and battery box are mounted on a galvanized bolt-on hanger frame. Master disconnect switch is accessible from front of the pump box. Hydraulic components are mounted on a vertical plate that makes all components easily accessible for service



#### **Polyethylene Pads**

Protect lower column areas from dock impacts

#### **Distributed by:**



#### **Fully Galvanized - STANDARD**

Galvanization is the process by which zinc is coated over corrosive (easily rusted) metals. The process of galvanizing not only protects from corrosion of various 'soft metals' but also adds strength to the original, uncoated metal

M-214-0420




# **COLUMNLIFT<sup>™</sup> SERIES** The Next Generation BMR



# **Optional Features**


- Bolt-on
- Rollers or Slide Pads
- Dual Pump & Motor
- Power Down on Demand
- Header Kit
- Dome Light
- Auxiliary Control
- Hand-Held Control
- Conspicuity Tape
- Pressure Gauge

# Loadable Platform Space with Cart Stops Deployed

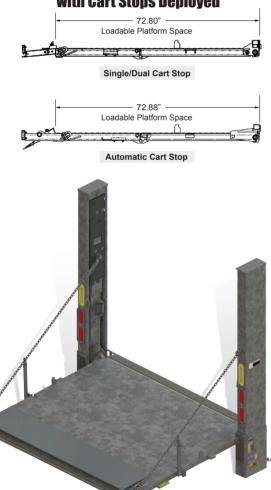















## **New Optional Bolt-On Design**

New bolt-on design concept reduces overall gate depth by 1.75 inches

# **Rollers OR Slide Pads**

As an industry first, the BMR is available with rollers or slide pads

### **New Switch Location**

Control switch is located on the column and now features an optional power down on demand button

#### New Pump Box / Hydraulic Design / LED Controller

Pump and battery box are mounted on a galvanized bolt-on hanger frame. Master disconnect switch is accessible from front of the pump box. Hydraulic components are mounted on a vertical plate that makes all components easily accessible for service. Controller Quick Diagnostic Built-in LED serve as function indicators

#### **New Retention Ramp Mechanism**

The new retention ramp mechanism makes it easy to lock and unlock the ramp and keeps it tightly stowed during transit

#### **Fully Galvanized - STANDARD**

Galvanization is the process by which zinc is coated over corrosive (easily rusted) metals. The process of galvanizing not only protects from corrosion of various 'soft metals' but also adds strength to the original, uncoated metal

Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670 800.227.4116 Fax 888.771.7713, www.maxonlift.com