


# WEIGHTLIFTER

## Tailgates By **THIEMAN**


*Raising Performance to New Levels*

### Model TWL

Platform in Loading/Unloading Position

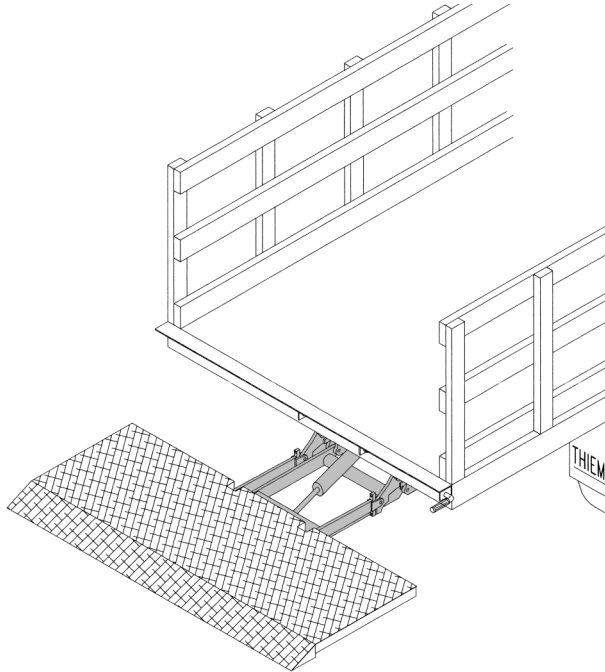

Platform in Travel Position

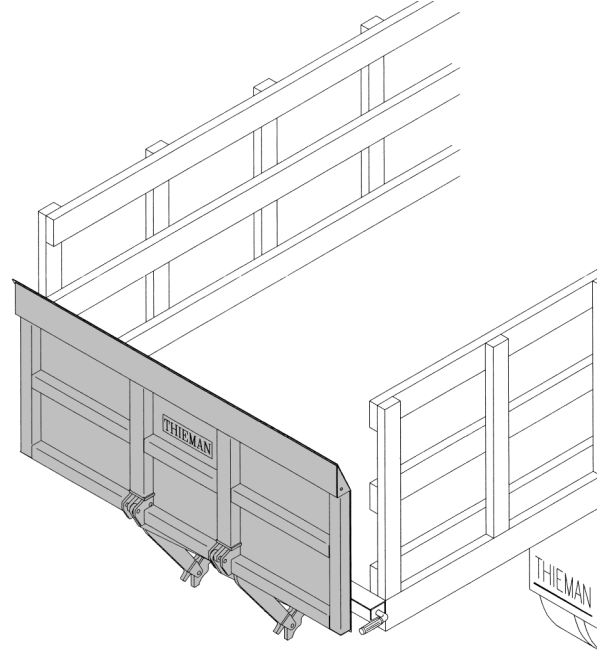

#### FEATURING:

- Meets TMC Electrical Guidelines
- 66" x 26" to 90" x 32" Platforms
- 1250 to 2000 lb. Capacities
- Cam Activated Power Close Platform
- Gravity Down Lowering
- Adjustable Cylinder Shaft
- Bed Height Range 33"-47" and 37"-52"

Designed for use on stake and van bodies, the THIEMAN TWL series is the most versatile and durable general purpose conventional style liftgate. The TWL features a wide range of bed heights which makes it possible to meet a variety of delivery needs.

The THIEMAN TWL's proven track record of dependability makes it a top choice for many applications.



# Features, Benefits and Specifications

## STANDARD FEATURES AND BENEFITS:

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• Screw in Grease Fittings at All Wear Points for Easier Maintenance</li> <li>• Adjustable Cylinder Shaft for Precise Alignment of Truck Floor and Platform</li> <li>• 150 Amp Circuit Breaker for Electrical Protection</li> <li>• Gravity Down Platform for Less Demand on Power Unit</li> </ul> | <ul style="list-style-type: none"> <li>• Cam Activated, Power Close Platform for Easy Closing</li> <li>• Latch Chain for Increased Safety</li> <li>• Meets All TMC Electrical Guidelines for Reduced Service Requirements</li> </ul> |
|---|--|

## OPTIONS FOR TWL SERIES:

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• Push Button Control</li> <li>• In-Cab Shut Off Switch</li> <li>• Remote Pendant Control</li> <li>• Expanded Metal Platform</li> <li>• Load Area, Ramp Change</li> </ul> | <ul style="list-style-type: none"> <li>• Power Down</li> <li>• PTO Power Source</li> <li>• Square Edge, No Ramp</li> <li>• Power Unit Enclosure</li> </ul> |
|--|--|

| Model No. | Platform       | Capacity | Lowering | Install Weight | Bed Height Range |
|-----------|----------------|----------|----------|----------------|------------------|
| TWL-125ET | 66" x 26" + 8" | 1250 lb. | Gravity  | 436 lb.        | 33"-47"          |
| TWL-125ET | 78" x 32" + 8" | 1250 lb. | Gravity  | 531 lb.        | 33"-47"          |
| TWL-125ET | 84" x 32" + 8" | 1250 lb. | Gravity  | 546 lb.        | 33"-47"          |
| TWL-16ET  | 78" x 32" + 8" | 1600 lb. | Gravity  | 561 lb.        | 37"-52"          |
| TWL-16ET  | 84" x 32" + 8" | 1600 lb. | Gravity  | 576 lb.        | 37"-52"          |
| TWL-16ET  | 90" x 32" + 8" | 1600 lb. | Gravity  | 596 lb.        | 37"-52"          |
| TWL-20ET  | 78" x 32" + 8" | 2000 lb. | Gravity  | 564 lb.        | 37"-52"          |
| TWL-20ET  | 84" x 32" + 8" | 2000 lb. | Gravity  | 579 lb.        | 37"-52"          |
| TWL-20ET  | 90" x 32" + 8" | 2000 lb. | Gravity  | 599 lb.        | 37"-52"          |

ET - Electric w/Toggle Switch Control/Power Close

Distributed By:

**THIEMAN**  
**TAILGATES INC.**  
*Raising Performance to New Levels*

600 East Wayne Street  
 Celina, Ohio 45822  
 Phone: (419) 586-7727 or  
 800-524-5210  
 Fax: (419) 586-9724  
 www.thieman.com  
 ttgates@wesnet.com

THIEMAN Reserves the right to Change Products  
 Specifications at any time Without Prior Notice.  
 Printed in U.S.A. 12/00 • 2M • MP46572


# WeightLifter

**Tailgates By THIEMAN**


*Raising Performance to New Levels*

## Model WT

Platform in Loading/Unloading Position

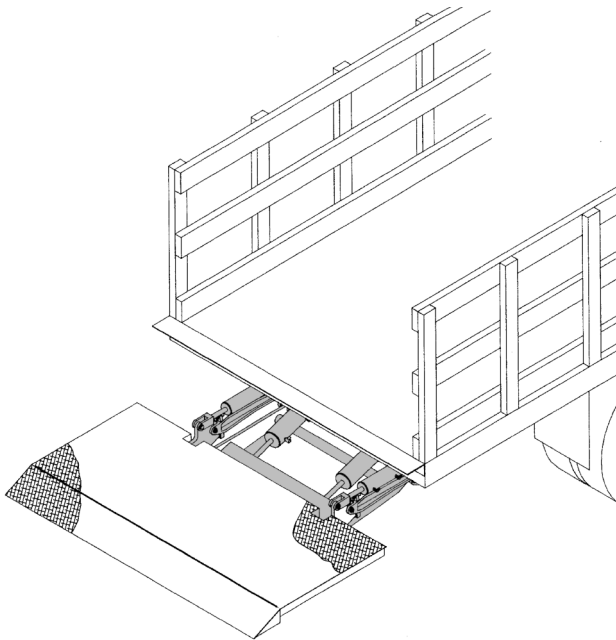

Platform in Travel Position

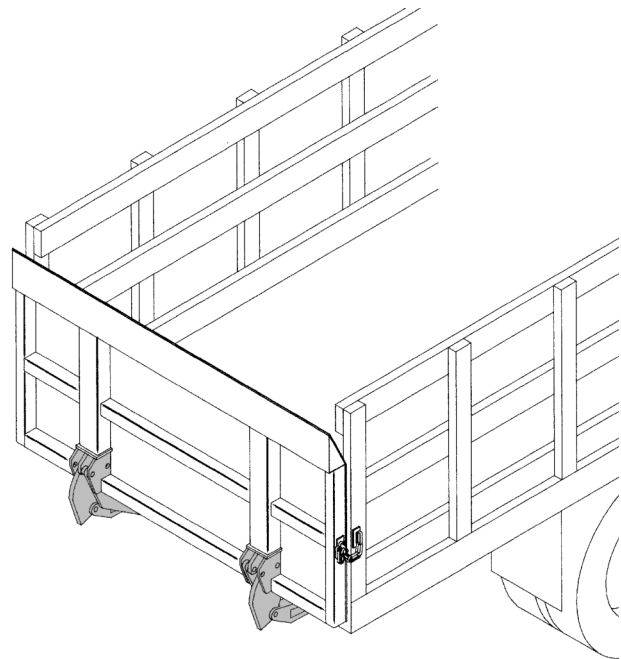

### FEATURING:

- Meets TMC Electrical Guidelines
- 84" x 36" to 90" x 48" Platforms
- 2,000 to 4,000 lb. Capacities
- Bed Height Range 40" to 54"
- Dual Cylinder Lift
- Sealed Toggle Switch Control
- Latch Chains and Snubber Kit
- Power Down Lowering
- Cast Bronze Bearings at Pivot Points

Designed for use on stake and van bodies, the THIEMAN WT series is the most durable, dependable, conventional liftgate on the market today. The WT is built with many standard features including a wide-arm, dual cylinder lift, giving maximum lifting stability when handling sizeable loads. With the addition of cast bronze bearings at critical wear points, this conventional style liftgate is built to last for many years.

If you're searching for a conventional liftgate that improves efficiency and saves your company dollars, the THIEMAN WT is your answer.



# Features, Benefits and Specifications

## STANDARD FEATURES AND BENEFITS:

- Environmentally Sealed Toggle Switch Control for Enhanced Reliability and Easy Installation
- Dual Cylinder Lift for Maximum Stability
- Screw-In Grease Fittings at all Wear Points for Easy Maintenance
- Latch Chains and Snubber Kits for Increased Safety and Reduced Wear of Liftgate
- 150 Amp Circuit Breaker for Electrical Protection
- Adjustable Cylinder Shafts and Idler Arms for Precise Alignment of Truck Floor & Platform
- Power Down for Better Reliability in Cold Weather Operation
- Bronze Bushings at Critical Pivot Points for Reduced Maintenance Costs
- Wider Lift Arms for Maximum Stability
- Meets All TMC Electrical Guidelines for Reduced Service Requirements

## AVAILABLE OPTIONS FOR WT:

- In-Cab Shut Off Switch
- Pump and Motor Cover
- Power Unit Enclosure
- Special Platform and Ramp Sizes
- Aluminum Platform
- Expanded Metal Platform
- Bar Grate

| Model No. | Platform        | Rated Load Cap. lbs. | Lowering | Approx. Installed Weight | Bed Height Range |
|-----------|-----------------|----------------------|----------|--------------------------|------------------|
| WT20EST   | 84" x 36" + 10" | 2000                 | Power    | 938                      | 40" to 54"       |
| WT20EST   | 90" x 36" + 10" | 2000                 | Power    | 958                      | 40" to 54"       |
| WT20P     | 84" x 36" + 10" | 2000                 | Power    | 936                      | 40" to 54"       |
| WT20P     | 90" x 36" + 10" | 2000                 | Power    | 956                      | 40" to 54"       |
| WT20EST   | 90" x 42" + 10" | 1750                 | Power    | 981                      | 40" to 54"       |
| WT20EST   | 90" x 48" + 10" | 1500                 | Power    | 1069                     | 40" to 54"       |
| WT20P     | 90" x 42" + 10" | 1750                 | Power    | 989                      | 40" to 54"       |
| WT20P     | 90" x 48" + 10" | 1500                 | Power    | 1051                     | 40" to 54"       |
| WT30EST   | 84" x 36" + 10" | 3000                 | Power    | 936                      | 40" to 54"       |
| WT30EST   | 90" x 36" + 10" | 3000                 | Power    | 956                      | 40" to 54"       |
| WT30P     | 84" x 36" + 10" | 3000                 | Power    | 906                      | 40" to 54"       |
| WT30P     | 90" x 36" + 10" | 3000                 | Power    | 926                      | 40" to 54"       |
| WT30EST   | 90" x 42" + 10" | 2500                 | Power    | 1009                     | 40" to 54"       |
| WT30EST   | 90" x 48" + 10" | 2000                 | Power    | 1081                     | 40" to 54"       |
| WT30P     | 90" x 42" + 10" | 2500                 | Power    | 1037                     | 40" to 54"       |
| WT30P     | 90" x 48" + 10" | 2000                 | Power    | 1101                     | 40" to 54"       |
| WT40EST   | 90" x 36" + 10" | 4000                 | Power    | 1006                     | 40" to 54"       |
| WT40EST   | 90" x 42" + 10" | 3500                 | Power    | 1059                     | 40" to 54"       |
| WT40EST   | 90" x 48" + 10" | 3000                 | Power    | 1121                     | 40" to 54"       |
| WT40P     | 90" x 36" + 10" | 4000                 | Power    | 1055                     | 40" to 54"       |
| WT40P     | 90" x 42" + 10" | 3500                 | Power    | 1059                     | 40" to 54"       |
| WT40P     | 90" x 48" + 10" | 3000                 | Power    | 1135                     | 40" to 54"       |

Note: On "P" Model Gates a 70% ratio PTO is recommended

EST - Electric w/Toggle Switch Control, Power Down/Power Close  
P - PTO w/Power Close

Distributed By:

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice.  
Printed in U.S.A. Rev. 5/10 • 2M • M70079

**THIEMAN**  
**TAILGATES, INC.**  
*Raising Performance to New Levels*

600 East Wayne Street  
Celina, Ohio 45822  
Phone: 419-586-7727 or  
800-524-5210  
Fax: 419-586-9724  
[www.thiemantailgates.com](http://www.thiemantailgates.com)  
[info@thiemantailgates.com](mailto:info@thiemantailgates.com)