

Vehicle Mount Arrow Board Model # AV253672

Features

- ▶ Arrow Board Meets MUTCD
- ▶ Photocell for Auto Dimming
- ▶ Super Bright LED Technology
- ▶ Easy to Operate & Maintain
- ▶ Arrow Board
- ▶ Powder Coat Paint
- ▶ 360 Degree LED visors
- ▶ 7 or 12 Function Control Arrow Board
- ▶ 30-40 Flash Rate
- ▶ Numerous Size and Mounting Options
- ▶ Durable Finish Resist the Elements
- ▶ Lightweight Arrow Board



(Standard 72" bed pictured.)




Optional Remotes Available

The K&K Vehicle Mounted Arrow Board has a standard built-in controller that is located on the lower right corner of the panel face. However, optional wireless or wired remotes are available for easy operation and mode selection.

Vehicle Mount Arrow Board - Specifications

Model # AV253672

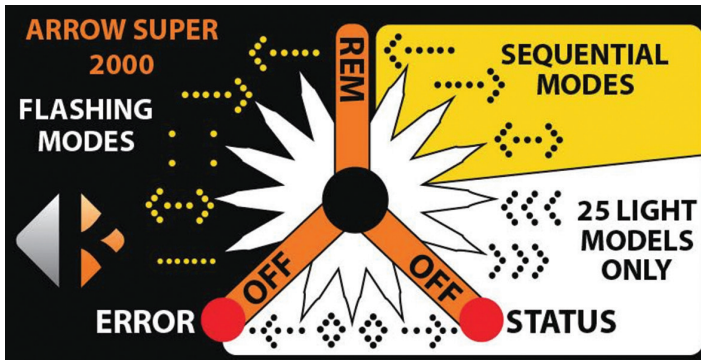

Controller

Battery Status Indicator Light: Indicates if solar is charging and progress. Multi-color LED indicates the battery condition (low, fair, or good).

Error LED: Indicates low voltage disconnect, low voltage disconnect 2, or over voltage condition

Mode Selector: Capable of 13 modes in 25 lamp configuration

Sign Display

Construction: Height: 36"

Length: 72"

Width: 3 3/8"

Material:

- .080 Aluminum frame 36"x72" w/ (2) 35 3/4" cross members
- .063 Aluminum front panel 36"x72"
- .063 Aluminum front panel 36"x72"

Salt Spray Fog: 1,000 hours

UV Resistance: 500 hours

LED bulbs: (15) yellow/amber Par 46 LED's with 360° high impact plastic visor. Push on type connectors to prevent separation due to vibration during travel and operation.

Options

- ▶ Three small amber indicator lights added to the back of display.
- ▶ Convert Vehicle Mounted Arrow Boards to AC by adding 20W power supply (includes wiring).
- ▶ Upgrade to 25' wiring harness data cable.
- ▶ Upgrade to 40' wiring harness data cable.
- ▶ Upgrade to 60' wiring harness data cable.
- ▶ Hitch mount.
- ▶ Low profile mount.
- ▶ Over cab mount. Also requires (low profile mount)
- ▶ Upgrade to 60' wiring harness data cable.
- ▶ Tailgate mount.
- ▶ Actuator for Vehicle Mounted Arrow Board – 600 lb; includes 12' cable.
- ▶ Upgrade to 25' actuator cable.
- ▶ Upgrade to 40' actuator cable.
- ▶ Upgrade to 60' actuator cable.
- ▶ Two-tube frame for rail mount.



888.414.3003 toll-free • 662.566.2025 phone • 662.566.7123 fax
www.k-ksystems.com • sales@k-ksystems.com