

GET STARTED

RM 70GO! – PERFECT FOR CRUSHING AND RECYCLING START-UPS

Capacity	Up to 145 TPH, depending on material
Inlet opening	30" x 23" 760 x 600 mm
Fuel consumption	Approx. 4 GPH 16 l/h
Crusher unit	Single speed 4-bar impact rotor, direct drive
Feed unit	Asymmetric Hardox 2.6 yd³ vibro feeder Feed control system for automatic crusher load-dependent conveying
Power unit	140 HP Deutz (TIER 3), 4 cylinders 155 HP John Deere (TIER 4F), 4 cylinders Diesel-electric, 40 kVA 400V gen-set with external outlets for additional plug-on equipment.
Prescreening	38" x 22" prescreen grizzly with output to main discharge conveyor
Weight incl. attachments	Approx. 47,000 lbs. 21,400 kg
Screen attachment	High performance self-cleaning finger-screen capable of producing a finished product between ¾" to 1½". Includes return conveyor for closed circuit production.



Dust Suppression



Magnetic Separator



Hammer Changing Device



RM EXCLUSIVE Release System



FULLY Remote Operated



RM EXCLUSIVE Track and Crush



Engine Compartment Light



RM EXCLUSIVE Factory Direct Training



RM EXCLUSIVE Lifetime Customer Support



"Over the years I have been paying to truck and dispose waste materials at the recycling yard. The next day I purchased back base material. I realized this didn't make sense and there must be a better way to deal with the waste. Since I own a RM 70GO! I haven't purchased any material anymore and I pay my own guy and excavator to crush my material."
- Mike M, excavating and utility contractor



THE SIMPLICITY OF CRUSHING AND RECYCLING



Easy 5-Axle Move

Mobilizing a crusher has never been this easy. From trailer to crushing in less than 20 minutes.



Simple Controls

Quick 3 step crusher startup.
1. Engage the clutch
2. Start the engine
3. Start the belts





The Simplicity of Safety

2-hand hydraulic adjustment.
Zero pinch points.



Small Footprint and Remarkably Quiet

Designed with the urban contractor in mind - crush & screen & track at the same time.

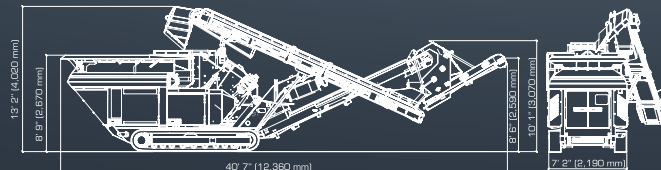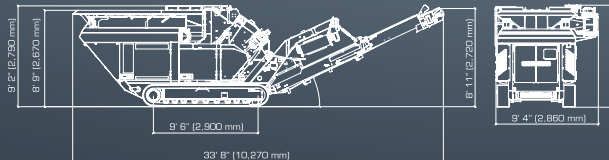

Weight oversize separator 1,675 lbs. | 760 kg

Weight return conveyor 1,410 lbs. | 640 kg



Dust Suppression

Allows processing in the most sensitive areas.



RM EXCLUSIVE

Fully Remote Operated

Total machine control in the palm of your hand.