

FT-3 Coil

Coil

GVWR LBS:

2,900

GAWR LBS:


3,500

WEIGHT LBS:

1,100

CAPACITY LBS:

1,800

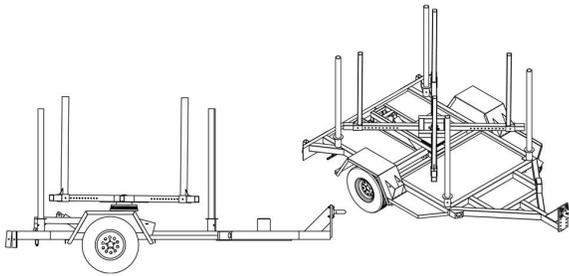

| Standard & Other Options | Description | Std. Option | Std. Qty. | Unit |
|--------------------------|--|-------------|-----------|--------|
| Deck Length | Main Deck Length | X | 8.00 | Feet |
| Deck Type | Expanded Metal | X | 1.00 | Std |
| Width | 102" OD | X | 1.00 | Inches |
| Brakes | Electric, Dexter FSA (Fwd Self Adj) On All Axles | X | 1.00 | Std |
| Axles | 3.5K Dexter Torflex | X | 1.00 | Std |
| Suspension | Rubber Torsion, Dexter TorFlex | X | 1.00 | Std |
| Tires & Wheels | ST225/75R 15 D, 5 Bolt [15 x 6] White Mod | X | 2.00 | Std |
| Hitch Length | Center of Coupler to Headboard, Appx (18" Tube Extension past A-Frame) | X | 5.00 | Feet |
| Hitch Type | 2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt) | X | 1.00 | Std |
| Jack | 7K Drop Leg ** Top Wind ** | X | 1.00 | Std |
| Plug | 7 Pole RV | X | 1.00 | Std |
| Lights | LED Lights (Peterson), Sealed Wiring Harness (Sealco) | X | 1.00 | Std |
| Trailer Color | Felling Black # CCA945378 (White Felling Decal) | X | 1.00 | Std |
| Stripe Color | White | X | 1.00 | Std |
| Standard | (4) 48" High Stanchions Equally Spaced for 2" & 3" Tubing w/ ID of 48" & OD of 70" | X | 1.00 | Std |
| Standard | (4) Vertical Roller Pipe Guides | X | 1.00 | Std |
| Standard | 102" Dia Tilting Turn Table W/Sealed Bearings | X | 1.00 | Std |
| Standard | 3,000# Rated Tilting Turn Table, Elec/Hyd Actuated, w/Lockable Box & Battery Boxes Hinge to the Front of the Trailer | X | 1.00 | Std |
| Standard | 3/8" Safety Chains, Grade 70 | X | 1.00 | Std |
| Standard | 38" Turn Table Height | X | 1.00 | Std |
| Standard | Document Holder | X | 1.00 | Std |
| Standard | Rear Stabilizer Legs | X | 1.00 | Std |



FELLING TRAILERS, INC.

1525 Main Street South, Sauk Centre, MN 563
Phone: 800-245-2809 - www.felling.com

Product Sheet

4500-A

| | | | | |
|----------|-------------------------------------|---|------|-----|
| Standard | Turn Table Brake Actuated from Rear | X | 1.00 | Std |
| GVWR | 2,900 lbs | X | 1.00 | Std |