

FT-70-2 HX

Semi - HX Series

GVWR LBS:

82,500

GAWR LBS:

45,000

WEIGHT LBS:


12,500

CAPACITY LBS:

70,000

- Swing Clearance is 84" Standard
- Ridewell 260 Series Suspension
- Engineered, Cambered, Fabricated Main Beams
- 80K Webs, T-1 Flanges
- Ready for a 60" Chain Box on both sides, located behind dollies

- 6" Structural channel side rails
- 4" Jr I-Beam crossmembers on 12" centers
- Mid-Ship Turn/Marker Lights
- * NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

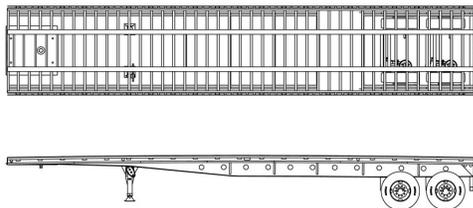

| Standard & Other Options | Description | Std. Option | Std. Qty. | Unit |
|--------------------------|---|-------------|-----------|--------|
| Load Capacity | 70,000 lbs Distributed, 45,000 in 10 ft, 41,500 lbs in 4 ft | X | 1.00 | Std |
| Deck Length | Main Deck Length | X | 48.00 | Feet |
| Deck Type | Apitong, 1 1/8" | X | 1.00 | Std |
| Deck Type | Pierced 4" (80K) Jr I-Beam Crossmembers, 12" on Center | X | 1.00 | Std |
| Appx Deck Height | 58" Front, 55" Rear, Loaded | X | 1.00 | Inches |
| Width | 102" OD | X | 1.00 | Inches |
| Tie Downs | Rub Rail & Stake Pockets with Double Pipe Spools | X | 1.00 | Std |
| Brakes | Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles) | X | 1.00 | Std |
| Axles | 25K Oil Bath | X | 2.00 | Std |
| Suspension | 49" Spread Air Ride, Ridewell 260 with Dump Valve | X | 1.00 | Std |
| Tires & Wheels | 11R/ 22.5 H, 10 Bolt [22.5 x 8.25] Hub Pilot | X | 8.00 | Each |
| Hitch Type | Semi King Pin [S] with 30" Setback, 48" Height | X | 1.00 | Std |
| Jack | 200,000# Twin 2 Speed, Holland Mark V-19 (62,500 lb Lift Capacity) | X | 1.00 | Pair |
| Plug | 7 Pole Semi | X | 1.00 | Std |
| Lights | LED Lights (Peterson), (3) lights per side Deck, (3) per side Tailboard, Sealed Wiring Harness (Sealco) | X | 1.00 | Std |
| Lights | Mid-Turn/Marker LED Lights | X | 1.00 | Std |
| Trailer Color | Felling Black # CCA945378 (White Felling Decal) | X | 1.00 | Std |
| Stripe Color | White | X | 1.00 | Std |
| Standard | Document Holder | X | 1.00 | Std |
| Standard | Ready for a 60" Chain Box on both sides, located behind dollies | X | 1.00 | Std |
| Standard | Rear Rubber Dock Bumpers | X | 1.00 | Pair |
| GVWR | 82,500 lbs | X | 1.00 | Std |