

FT-16 I

DD I Series

GVWR LBS:

18,400

GAWR LBS:

16,000


WEIGHT LBS:

4,000

CAPACITY LBS:

14,400

- 10x15# I-beam Main Frame
- 4" (80K) Jr I-beam crossmembers
- 18" on center

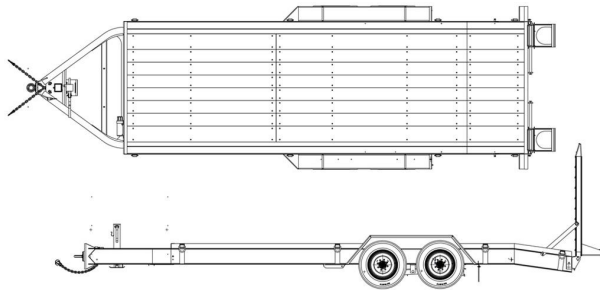

• Shown with optional large toolbox

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Frame Type	3" Angle Lip Up	X	1.00	Std
Deck Length	Main Deck Length	X	18.00	Feet
Deck Type	White Oak 2" Nom	X	1.00	Std
Ramps; Rear	6' x 16" Angle Iron Spring Assist	X	1.00	Pair
Ramps, Acc	Full Width Ramp Rod	X	1.00	Std
Appx Deck Height	24" Loaded, 27" Unloaded	X	1.00	Inches
Width	102" OD, 83" ID	X	1.00	Inches
Tie Downs	D-Rings, 5/8" Straight	X	8.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	8K Dexter Oil Bath Drop	X	2.00	Std
Suspension	Dexter Spring, 36" Spread	X	1.00	Std
Tires & Wheels	215/75R 17.5 H, 8 Bolt [17.5 x 6.75] Plate Wheel	X	4.00	Std
Hitch Length	Center of Coupler to Headboard	X	5.00	Feet
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Hitch Height	Approximate Adjustment Hitch Range 14.5" to 23.5" (23" to 28" if Hyd)	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	4 tail light system, LED, Sealed Wiring Harness	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
GVWR	18,400 lbs	X	1.00	Std