

### FT-12 IT-I

### DD IT-I Series

**GVWR LBS:**

**14,500**

**GAWR LBS:**

**14,000**

**WEIGHT LBS:**


**3,400**

**CAPACITY LBS:**

**11,100**

- 6x12# I-beam Main Frame
- 3" (80K) Jr I-beam crossmembers
- 17" Avg on center
- See Option Page for Stationary Deck

- (1) Cushion Cylinder
- Deck Length = Tilt Angle
- 14' = 15 Degrees 16' = 13 Degrees
- 18' = 12 Degrees 20' = 11 Degree

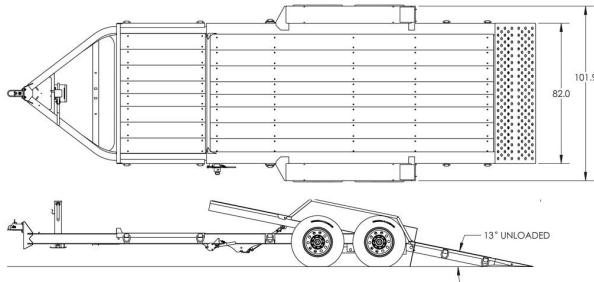

• Shown with optional toolbox, rub rail & stake pockets, spare wheel & tire mounted.

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Stationary Deck	Stationary Deck	X	4.00	Feet
Deck Length	Tilt Deck Length (Includes 2' Steel Punch Plate Approach)	X	16.00	Feet
Deck Type	Pressure Treated Wood	X	1.00	Std
Appx Deck Height	19.5" Loaded, 22" Unloaded	X	1.00	Inches
Width	102" OD, 82" ID	X	1.00	Inches
Tie Downs	D-Rings, 5/8 Straight	X	10.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	7K Dexter, Drop	X	2.00	Std
Axles, Acc	Dexter EZ-Lube Hubs	X	1.00	Std
Suspension	Dexter Spring, 36" Spread	X	1.00	Std
Tires & Wheels	ST235/80R 16 E, 8 Bolt [16 x 6] White Mod	X	4.00	Opt
Hitch Length	Center of Coupler to Headboard	X	5.00	Feet
Hitch Type	2 5/16" Ball Adjustable, [B] 21,000 lb Plate Mount	X	1.00	Std
Hitch Height	Approximate Adjustment Hitch Range 13.5" to 22.5" (18" to 22.5" if Hyd)	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED, 4 tail light system, Sealed Wiring Harness (Tail lights located on rear of fenders)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Single Cushion Cylinder	X	1.00	Std
GVWR	14,500 lbs	X	1.00	Std