

NEW



**TELESKID** | 2TS-7T | 3TS-8W | 3TS-8T

Gross rated power: 74 hp (55 kW) | Lift capacity: 2,096-3,695 lb (951-1,676 kg) | Max. load height: 13'3" (4.03 m)



# NOW YOU CAN >>

**3TS-8W** >  
ROC: 3,208 lb



**2TS-7T**  
ROC: 2,096 lb  
**NEW**



# A NEW, SMALLER TELESKID JOINS THE RANGE

The range of JCB Teleskids delivers endless possibilities. The world's only skid steer and compact track loaders with a telescopic boom, Teleskids are the most versatile machines you've ever seen.

Now you can lift higher, reach further and dig deeper than any other skid steer on the market. And with the addition of the new, compact 2TS model, now you can get to more places and access even more areas than ever before. Try one for yourself and join the thousands of Teleskid owners who say they'll never go back to a conventional skid steer again.

To book a Teleskid demo, visit [jcb.com/teleskid](http://jcb.com/teleskid)

A yellow and grey JCB Teleskid 3TS-8T compact track loader is shown from a front-three-quarter view. The machine has a telescopic boom with a bucket attachment. The operator's cab is open, revealing the interior. The tracks are black with a tread pattern. The background is dark and reflective.

▲  
**3TS-8T**  
ROC: 3,695 lb

**JCB** TELESKID»

# LIMITLESS **VERSATILITY**

**THE JCB TELESKID IS THE ONLY SKID STEER OR COMPACT TRACKED LOADER WITH A LIFT HEIGHT OVER 13 FEET AND A FORWARD REACH OF 8 FEET, ALLOWING YOU TO DO THINGS YOU NEVER THOUGHT POSSIBLE.**



**1** The JCB Teleskid 3TS has a lift height over 13 feet (4.03 m) and the 2TS has a lift height of 12 feet (3.6m) allowing you to easily and quickly load trucks, bins and dumpsters without using a ramp.

**2** With rated operating capacities up to 3,695 lb (1,676 kg), the JCB Teleskid can handle the heaviest loads.

**3** JCB Teleskid's telescopic boom allows loads to be placed quickly and easily over fences and barriers.

**4** With 8 feet (2.4 m) of forward reach on the 3TS and 7 feet (2.1 m) on the 2TS, placing or lifting loads through or over obstacles is efficient and easy.

**5** Now you can reach and dig below grade to a depth of 3 feet (0.9 m) on the 3TS and 2 feet (0.8 m) on the 2TS, to prepare or clear ditches, rip out trees and roots, and more.

At full extension, the 3TS Teleskid has a rated operating capacity of 1,614 lb (732 kg) and the 2TS has a rated operating capacity of 1,140 lb (517 kg).



**6** The Teleskid is the first skid steer and compact track loader with both vertical and radial lift.

**7** Zero turning radius for exceptional maneuverability.

**8** The 3TS Teleskid has an operating weight of 12,615 lb (5,722 kg) and the 2TS has an operating weight of 9,914 lb (4,497kg), allowing both machines to be transported easily on a trailer (check local regulations).

**9** The 3TS Teleskid has a 24 gpm (90 l/min) hydraulic circuit as standard, with a 33 gpm (125 l/min) option. The 2TS Teleskid has a 18.6 gpm (70 l/min) hydraulic circuit as standard, with a 29 gpm (110 l/min) option. Standard flow is available when the boom is extended or retracted; high flow is available when the boom is retracted.

**10** SAE/ISO standard quick hitch allows use of any skid steer and compact track loader attachment, with a single-point quick hitch lock-and-unlock red indicator for enhanced visibility.




7



8



9

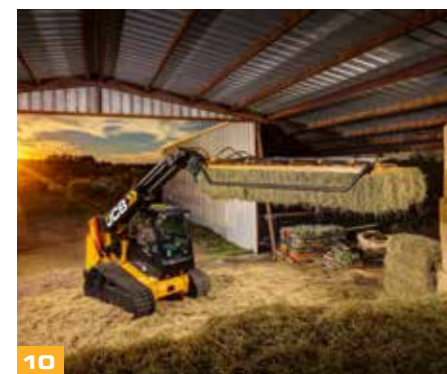

10

# GREATER PRODUCTIVITY

## THE JCB TELESKID DOES THE WORK OF FOUR MACHINES – A FORKLIFT, TELESCOPIC HANDLER, COMPACT LOADER AND A SKID STEER – DELIVERING UNBEATABLE PRODUCTIVITY.

- 1** Load and unload a standard 8-foot trailer from one side for faster turnaround times.
- 2** The 3TS Teleskid models are equipped with the JCB EcoMAX engine; the 2TS uses a JCB Diesel by Kohler engine. Both engines are Tier 4 Final-compliant without need for exhaust aftertreatment, for reduced operating costs and downtime.
- 3** Teleskid offers greater tractive force than a small telehandler or forklift, for greater pushing power even in sticky conditions.
- 4** JCB's Smoothride System ensures greater load retention and operator comfort for faster loading cycles and travel time.

Impressive breakout force enables the completion of tasks that might usually require bigger machines, and complete the job in less time.

Standard 2-speed transmission enables faster travel and cycle times.



# UNRIVALED STRENGTH AND STABILITY

WITH A PROVEN, HIGH-STRENGTH STEEL BOOM MOUNTED ON A SINGLE-PIECE, FULLY-WELDED CHASSIS, THE JCB TELESKID IS CONSTRUCTED FOR MAXIMUM STRENGTH AND DURABILITY.

**1** A solid undercarriage with cast steel, triple flanged rollers provides excellent track retention.

**2** The JCB telescopic boom is proven on more than 250,000 machines. JCB's extreme testing program includes prolonged high-stress loading, cold climate testing and repeated transmission use over thousands of cycles.

**3** The boom is mounted on a single-piece, fully-welded chassis to maximize strength and minimize weight.

**4** JCB's U-pressed (3TS) and box weld (2TS) boom designs use 20 percent more steel than traditional, two-armed skid steer booms.

**5** Centralized lift and extension rams evenly distribute load stresses. Rams are held in place by keyhole castings for greater structural integrity.

A recessed rear door provides increased protection from damage.



**1**



**2**



**5**



**3**



**4**

# TOTAL COMFORT AND CONTROL

**WITH EASY SIDE-DOOR ENTRY, THE LARGEST CAB ON THE MARKET AND ALL-ELECTRIC CONTROLS, THE JCB TELESKID OFFERS UNRIVALED COMFORT AND CONTROL.**

**1** All JCB Teleskid models feature a side-entry door. Not only is side entry easier and safer than a conventional skid steer, but the door is twice the size of competing machines.

**2** JCB Teleskids have one of the best ventilation systems in the industry, thanks to three cab ventilation filters and an external panel cover. Air conditioning is available as an option, to provide the perfect, controllable cabin environment.

**3** Arm rests provide support when operating the boom controls. The left armrest features a storage space and 12-volt socket.

**4** The 3TS cab is 33 percent larger than the average cab on competing skid steer machines, while the 2TS cab is 47 percent larger than its competitors.

A fully adjustable air-suspension seat (with optional heating) provides maximum comfort for the operator.



**5** The control panel to the operator's right features machine diagnostics, electric throttle and ignition switch.

**6** Machine option controls are placed just above eye level for easy viewing and avoidance of dirt and dust.

**7** JCB Teleskids feature switchable ISO/H-pattern controls, to suit the operator's preferences.

**8** A 7-way multi-function joystick makes it easy to control a wide range of hydraulic attachments, while low-effort, electric over hydraulic controls enable easy operation.

JCB's myCHOICE software allows the owner to choose from three transmission or loader modes, to change joystick responsiveness to match the way they work.



# THE WORLD'S SAFEST SKID STEER

**NO MORE CLIMBING OVER ATTACHMENTS OR UNDER AN UNSUPPORTED BOOM. JCB TELESKID FEATURES A SIDE DOOR FOR EASY ENTRY AND EXIT, AND UNMATCHED OPERATOR SAFETY.**


**1** A wide-opening door and large grab handles enable easy and safe entry and exit, eliminating crush and slip hazards associated with front-entry machines.

**2** The Teleskid features an electric quick hitch as standard. The quick hitch design reduces material build up and provides better visibility to the load.

**3** The electric quick hitch is fitted with a single-point lock-and-unlock flag to ensure that the attachment is safely locked/unlocked.



Tasks such as loading a truck or changing attachments are simplified due to excellent visibility to the cutting edge of the bucket and quick hitch.

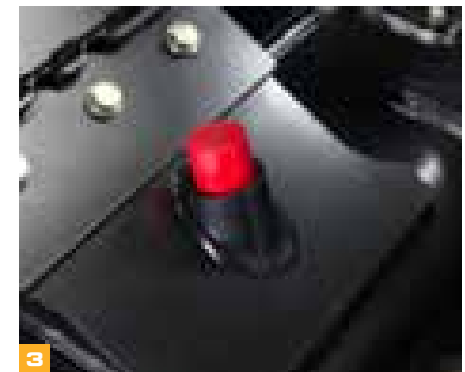

The rear view mirror is positioned just above eye level for excellent rear visibility.

THE WORLD'S SAFEST SKID STEER



Ordinary Skid Steer | 65° Visibility



JCB Teleskid 270° Visibility



5 JCB's Teleskid mono-boom design provides an exceptional 270-degree field of vision.

6 The Teleskid offers 60 percent better visibility than conventional twin-arm skid steer and compact track loaders.

7 Laminated side glass, rather than mesh, further enhances all-around visibility.



# UNBEATABLE SERVICEABILITY

WITH A TILTING CAB DESIGN AND LARGE REAR SERVICE DOOR, THE ENGINE BAY AND DAILY MAINTENANCE POINTS ARE EASILY ACCESSIBLE FOR QUICK SERVICING.

The fuel efficient JCB EcoMAX engine requires no DEF, DPF or other aftertreatment.



**1** The large rear service door provides easy access to all daily maintenance points and the engine bay. All daily checks and greasing can be done at ground level.



**2** The tilting cab can be operated by one person, for excellent maintenance access.

**3** Hydraulic fittings with o-ring face seals reduce downtime.

**4** The airflow fan features auto-reverse to keep the cooling pack free of debris.

**5** An air intake scavenge system minimizes debris build-up in the air filter to extend service intervals.



## VALUE ADDED

WHATEVER YOU NEED AND WHEREVER YOU ARE, THE DEPENDABLE JCB DEALER NETWORK IS HERE TO MAKE SURE YOUR MACHINERY PERFORMS TO ITS FULL POTENTIAL.



**1** JCB Technical Support Service provides instant access to factory expertise, day or night.

JCB's Finance team is always on hand to provide fast, flexible, competitive quotes.

**2** The global network of JCB Parts Centers is a model of efficiency. Genuine JCB parts are designed to work in perfect harmony with your machine for optimum performance and productivity.



**3** JCB Yellow Shield offers comprehensive extended warranties and service agreements, as well as service-only or repair and maintenance contracts. JCB maintenance teams offer competitive labor rates and no-obligation quotes.


JCB skid steer and compact track loaders come with a 2-year, 2000-hour warranty as standard, for total piece of mind.



- Manufacturing Facilities
- Dealers
- Parts Distribution Centers

*Note: JCB YELLOW SHIELD may not be available in your region. Please check with your local JCB dealer.*

## STATIC DIMENSIONS

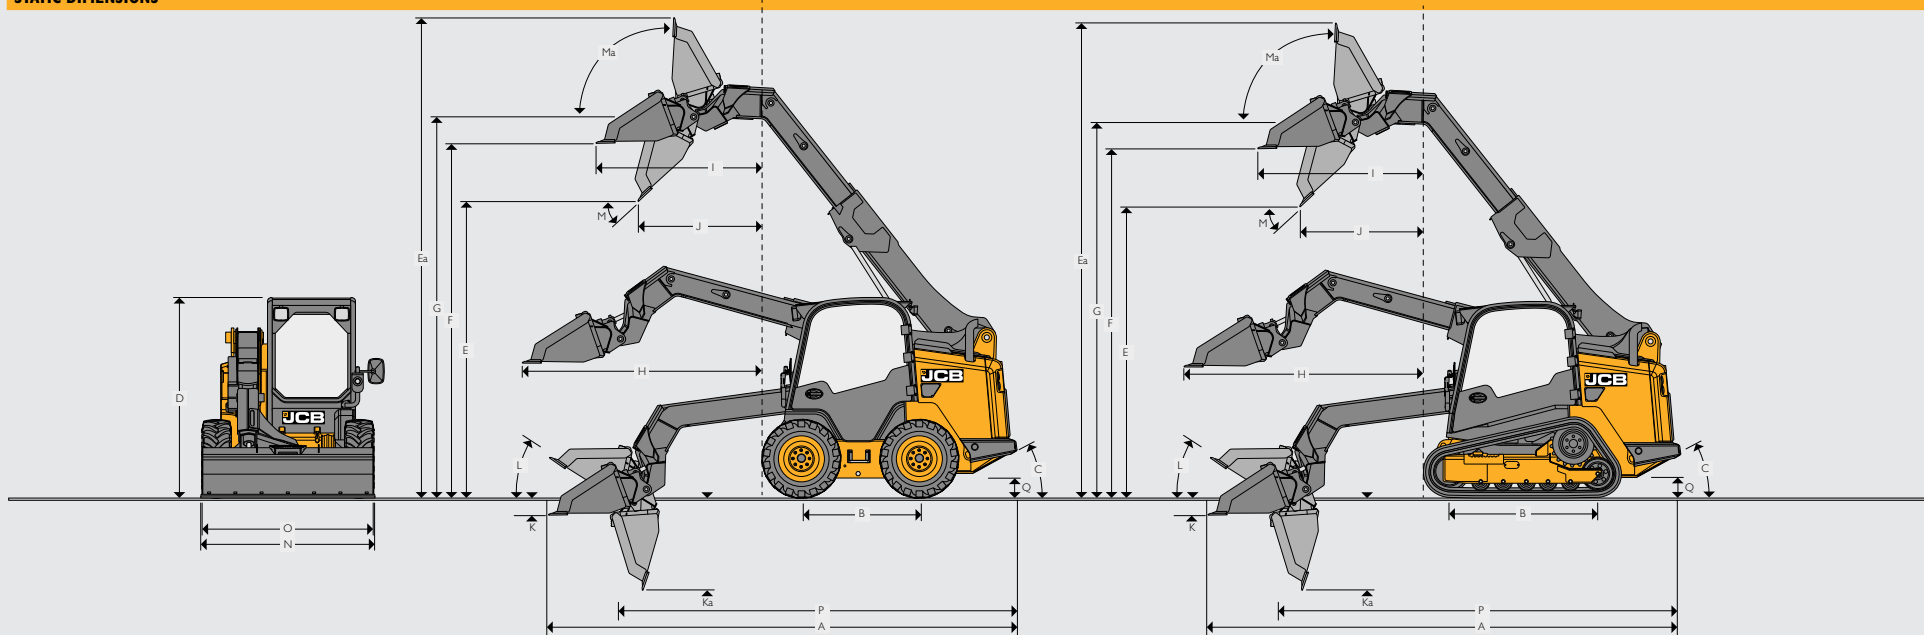

| Machine model |                                            | 2TS - 7T  |             | 3TS - 8W      |              | 3TS - 8T      |               |
|---------------|--------------------------------------------|-----------|-------------|---------------|--------------|---------------|---------------|
|               |                                            | Retracted | Extended    | Retracted     | Extended     | Retracted     | Extended Boom |
| A             | Overall length                             | ft-in (m) | 11-10 (3.6) | 12-5 (3.8)    | 16-1 (4.9)   | 12-5 (3.8)    | 16-1 (4.9)    |
| B             | Wheelbase                                  | ft-in (m) | 6-3 (1.9)   | 4-11 (1.25)   | 6-11 (2.1)   | 6-11 (2.1)    |               |
| C             | Angle of departure                         | degrees   | 28          | 29            | 29           |               |               |
| D             | Overall height                             | ft-in (m) | 6-7 (2.0)   | 6-11 (2.1)    | 6-11 (2.1)   |               |               |
| E             | Dump height                                | ft-in (m) | 7-6 (2.3)   | 7-7 (2.3)     | 10-4 (3.1)   | 7-10 (2.4)    | 10.8 (3.2)    |
| Ea            | Crowd height                               | ft-in (m) | 13-9 (4.2)  | 13-9 (4.1)    | 16-9 (5.1)   | 13-5 (4.1)    | 18-4 (5.0)    |
| F             | Loadover height                            | ft-in (m) | 9-4 (2.8)   | 9-7 (2.94)    | 12-3 (3.7)   | 9-6 (2.9)     | 12-5 (3.8)    |
| G             | Height to hinge pin fully raised           | ft-in (m) | 10-2 (3.1)  | 10-6 (3.2)    | 13-3 (4.05)  | 10-6 (3.2)    | 13-3 (4.03)   |
| H             | Reach                                      | ft-in (m) | 3-7 (1.1)   | 3-6 (1.1)     | 7-4 (2.25)   | 3-6 (1.1)     | 7-4 (2.25)    |
| I             | Max. reach @ full height                   | ft-in (m) | 3.2 (0.97)  | 4-11 (1.5)    | 3-6 (1.07)   | 3-3.3 (1)     | 5-7 (1.7)     |
| J             | Reach @ full height - fully dumped         | ft-in (m) | 2-0 (0.62)  | 2-1 (.6)      | 4-3 (1.4)    | 2-3 (0.7)     | 4-3 (1.3)     |
| K             | Dig depth - toe plate horizontal clearance | in (mm)   | 2 (51)      | 0.81 (22)     | 8 (201)      | 0.35 (9)      | 11.7 (294)    |
| Ka            | Dig depth - toe plate vertical clearance   | in (mm)   | 33.5 (835)  | 32.4 (825)    | 39.7 (1,010) | 32.4 (825)    | 43.3 (1,101)  |
| L             | Rollback @ ground                          | degrees   | 31          | 30            | 30           |               |               |
| M             | Dump angle                                 | degrees   | 36          | 42            | 42           |               |               |
| Ma            | Max. rollback angle                        | degrees   | 98          | 94            | 94           |               |               |
| N             | Bucket width - standard                    | ft-in (m) | 5-11 (1.8)  | 6-1 (1.85)    | 6-1 (1.85)   |               |               |
| O             | Width over tires - standard                | ft-in (m) | 5-6 (1.6)   | 6-0 (1.8)     | 6-5 (2.0)    |               |               |
| P             | Length without attachment                  | ft-in (m) | 9-2 (2.8)   | 9-11 (3.02)   | 9-11 (3.02)  |               |               |
| Q             | Ground clearance                           | in (mm)   | 9.0 (230)   | 9.4 (238)     | 9.4 (238)    |               |               |
|               | Rated operating capacity 35%               | lb (kg)   | 2,096 (951) | 1,140 (517)   |              | 3,695 (1,676) | 1,600 (725)   |
|               | Rated operating capacity 50%               | lb (kg)   |             | 3,208 (1,455) | 1,347 (611)  |               |               |
|               | Bucket capacity - standard                 | yd³ (m³)  | 1-10 (0.56) | 0.56 (0.43)   |              | 0.56 (0.43)   |               |

TURNING RADIUS

| Model                |           | 2TS - 7T  | 3TS-8W      | 3TS-8T      |
|----------------------|-----------|-----------|-------------|-------------|
| Bucket corner radius | ft-in (m) | 7-4 (2.2) | 7-6 (2.3)   | 7-6 (2.3)   |
| Quick hitch radius   | ft-in (m) | 4-3 (1.3) | 4-11 (1.5)  | 5-7 (1.7)   |
| Rear chassis radius  | ft-in (m) | 5-4 (1.6) | 5-11 (1.76) | 5-11 (1.76) |

SAE OPERATING WEIGHT

| Model   |         | 2TS - 7T      | 3TS - 8W      | 3TS - 8T       |
|---------|---------|---------------|---------------|----------------|
| Cab*    | lb (kg) | 9,914 (4,497) | 9,859 (4,472) | 12,615 (5,722) |
| Canopy* | lb (kg) | 9,782 (4,437) | 9,726 (4,412) | 12,482 (5,662) |

\*Fully operational with quick hitch, standard shovel, full fuel tank, closed cab + 165 lb (75 kg) operator.  
3TS-8W based on a machine equipped with 12x16.5 tires & 78" wide shovel  
3TS-8T Solid Deal 450 mm wide tracks & 78" wide shovel  
2TS-7T 320 mm wide tracks & 72" wide shovel

ENGINE

| Model                                    |            | 2TS - 7T              | 3TS - 8W              | 3TS - 8T |
|------------------------------------------|------------|-----------------------|-----------------------|----------|
| Engine model                             |            | KDI 2504 TCR          | EcoMAX TCAE-55        |          |
| Displacement                             | in³ (cm³)  | 2,482                 | 268 (4,399)           |          |
| Fuel                                     |            | Diesel                | Diesel                |          |
| Cooling                                  |            | Water                 | Water                 |          |
| Aspiration                               |            | Turbo                 | Turbo                 |          |
| Gross power SAE J1995                    | hp (kW)    | 74 (55) (@ 2,600 RPM) | 74 (55) (@ 2,400 RPM) |          |
| Gross torque @ 1,200 RPM                 | lb/ft (Nm) | 195 (265)             | 295 (400)             |          |
| Emission certification                   |            | EPA-T4F (EU St3B)     | EPA-T4F (EU St3B)     |          |
| Engine oil service interval hours        |            | 500                   | 500                   |          |
| Variable speed, hydraulically-driven fan |            | YES                   | YES                   |          |

SERVICE CAPACITIES

| Model                                |         | 2TS - 7T   | 3TS - 8W   | 3TS - 8T |
|--------------------------------------|---------|------------|------------|----------|
| Hydraulic system (including tank)    | gal (l) | 12.6 (48)  | 14.5 (55)  |          |
| Fuel tank                            | gal (l) | 25.9 (98)  | 27.2 (103) |          |
| Engine coolant                       | gal (l) | 2.7 (10.3) | 5.8 (22)   |          |
| Engine oil                           | gal (l) | 3.0 (11.5) | 3.7 (14)   |          |
| LH chaincase (wheeled machines only) | gal (l) | 5.0 (19.1) | 3.1 (11.7) |          |
| RH chaincase (wheeled machines only) | gal (l) | 5.0 (19.1) | 3.1 (11.7) |          |

HYDRAULIC PERFORMANCE

| Model                  |         | 2TS - 7T      | 3TS - 8W      | 3TS - 8T       |
|------------------------|---------|---------------|---------------|----------------|
| R.O.C retracted        | lb (kg) | 2,096 (951)   | 3,208 (1,455) | 3,695 (1,676)  |
| R.O.C extended         | lb (kg) | 1,140 (517)   | 1,347 (611)   | 1,614 (732)    |
| Tipping load retracted | lb (kg) | 6,138 (2,784) | 6,418 (2,911) | 10,558 (4,789) |
| Tipping load extended  | lb (kg) | 3,403 (1,544) | 2,694 (1,222) | 4,612 (2,092)  |
| Loader lift retracted  | lb (kg) | 4,127 (1,872) | 5,260 (2,386) | 5,187 (2,353)  |
| Loader lift extended   | lb (kg) | 2,476 (1,123) | 3,527 (1,600) | 3,708 (1,682)  |
| Bucket tilt retracted  | lb (kg) | 6,503 (2,950) | 6,473 (2,936) | 6,473 (2,936)  |
| Bucket tilt extended   | lb (kg) | 6,582 (2,985) | 6,695 (3,037) | 6,695 (3,037)  |

HYDRAULICS

| Model                |             | 2TS - 7T                | 3TS - 8W            | 3TS - 8T |
|----------------------|-------------|-------------------------|---------------------|----------|
| Pump Flow            | gpm (l/min) | 18.6 (70 l) @ 2,740 RPM | 24 (90) @ 2,300 RPM |          |
| Main relief pressure | psi (bar)   | 3,335 (230)             | 3,335 (230)         |          |
| HYD HP low flow      | hp (kW)     | 25.1 (18.7)             | 46.7 (34.8)         |          |
| HYD HP high flow     | hp (kW)     | 33.2 (24.7)             | 64.2 (47.8)         |          |
| Optional high flow   | gpm (l/min) | 29.4 (110)              | 33 (125)            |          |

ELECTRICS

| Model         |         | 2TS - 7T | 3TS - 8W   | 3TS - 8T |
|---------------|---------|----------|------------|----------|
| Starter motor | hp (kW) | 2.72 (2) | 5.63 (4.2) |          |
| Battery       | V/Ah    | 12 / 109 | 12 / 109   |          |
| Alternator    | amps    | 100      | 95         |          |

TRANSMISSION

| Model        |            | 2TS - 7T   | 3TS - 8W   | 3TS - 8T   |
|--------------|------------|------------|------------|------------|
| Single speed | mph (km/h) | 4.5 (7.2)  | 6.8 (10.9) | 5.7 (9.2)  |
| Two speed    | mph (km/h) | 6.4 (10.3) | 12.4 (20)  | 7.8 (12.6) |

TIRES / TRACKS

| Model    |  | 2TS -7T           | 3TS - 8W      | 3TS - 8T                      |
|----------|--|-------------------|---------------|-------------------------------|
| Standard |  | 12.6 in. (320 mm) | 12 16.5 10 PR | 17.7 in (450 mm) traction lug |



**ONE COMPANY, MORE THAN 300 MACHINES.**

**TELESKID** | 2TS-7T | 3TS-8W | 3TS-8T

Gross engine power: 74 hp (55 kW) Lift capacity: 2,096-3,695 lb (951-1,676 kg)

Max. load height: 13'3" (4.03m)

#### **JCB North America**

2000 Bamford Blvd., Pooler, Georgia, 31322 Tel: (912) 447-2000

Download the very latest information on this product range at [www.jcb.com](http://www.jcb.com)

JCB inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB inc. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J.C. Bamford Excavators Ltd.

Your nearest JCB Dealer

9999/5998 en-US 12/19 Issue2 DWUSA 5374

[f /JCBNA](https://www.facebook.com/JCBNA)
[t /JCBNA](https://twitter.com/JCBNA)
[YouTube /JCBNORTHAMERICA](https://www.youtube.com/channel/UCJCBNA)

