



Mini-Mac® Apartment Compactor

The Mini-Mac apartment compactor is a small, yet powerful compactor that can fit in areas where space is limited such as trash rooms of apartment and high-rise buildings. It is commonly used in conjunction with a chute feed system in multi-storied buildings.

Mini-Mac Compactor

Standard Features and Benefits

- 4:1 compaction ratio over un-compacted waste receptacles
- Remote power unit
- Convenient single side ratchet
- Push button controls mounted in the panel box face
- Hopper with access door and interlock for hand feed or chute feed applications
- Photoelectric cycle control
- Full container light
- CYNCON Life-Xtender Cyclic Control System that offers reliable, solid state circuitry eliminating pressure and limit switches



The Mini-Mac packs into a 2 cubic yard container on poly-clad casters that allow it to be moved to a pickup area. The Mini-Mac can be configured for front and rear load collection vehicles.



**Environmental
Solutions Group**

A DOVER COMPANY

Mini-Mac® Apartment Compactor

Dimensions and Specifications

| Specifications | Model 3A | | Model 5A | |
|--|---------------|---------------|---------------|---------------|
| Charge Box Capacity | | | | |
| [Mfr. Rating] | 0.39 cu. yd. | .30 m³ | 0.39 cu. yd. | .30 m³ |
| [WASTEC Rating] | 0.28 cu. yd. | .21 m³ | 0.28 cu. yd. | .21 m³ |
| Clear Top Opening | 22.5"L x 28"W | 572mm x 711mm | 22.5"L x 28"W | 572mm x 711mm |
| Capacity Per Hour | 37 cu. yd. | 28 m³ | 74 cu. yd. | 57 m³ |
| Performance Characteristics: | | | | |
| Cycle Time | 28 sec. | | 14 sec. | |
| Normal Force | 13,900 lbs. | 6305 kg | 13,900 lbs. | 6305 kg |
| Pack-Out Force | 16,400 lbs. | 7439 kg | 16,400 lbs. | 7439 kg |
| Normal Ram Face Force | 23.2 psi | 160 kPa | 23.2 psi | 160 kPa |
| Pack-Out Ram Face Force | 27.3 psi | 188 kPa | 27.3 psi | 188 kPa |
| Ram Penetration | 4" | 102mm | 4" | 102mm |
| Weight | 1,600 lbs. | 726 kg | 1,600 lbs. | 726 kg |
| Electrical Equipment: | | | | |
| Tri-Volt Motor 208/230/460 | 3 hp | 2.2 kW | 5 hp | 3.7 kW |
| Electric Control Voltage | 120 VAC | | | |
| UL® and CUL® Listed | | | | |
| Remote power unit with controls mounted in the face of the box | | | | |
| NEMA 3-type, All circuits fused | | | | |
| Standard controls: Keylock start/stop/reverse | | | | |
| Hydraulic Equipment: | | | | |
| Hydraulic Pump Capacity | 3 gpm | 11.4 L/min | 6 gpm | 22.7 L/min |
| Normal System Pressure | 1650 psi | 112 bar | 1650 psi | 112 bar |
| Maximum System Pressure | 1950 psi | 134 bar | 1950 psi | 134 bar |
| Hydraulic Cylinders (2) - Bore | 2.5" | 64mm | 2.5" | 64mm |
| Hydraulic Cylinders (2) - Rod | 1.25" | 32mm | 1.25" | 32mm |


Compactor Rental and Leasing Programs Available

For detailed specifications, recommendations, or free economic studies comparing various systems, contact Marathon Customer Care at **1-800-633-8974**.

RAMJET
Stationary and self-contained compactors.

Authorized Dealer:

Typical Mini-Mac Model 3A compactor configuration with chute system

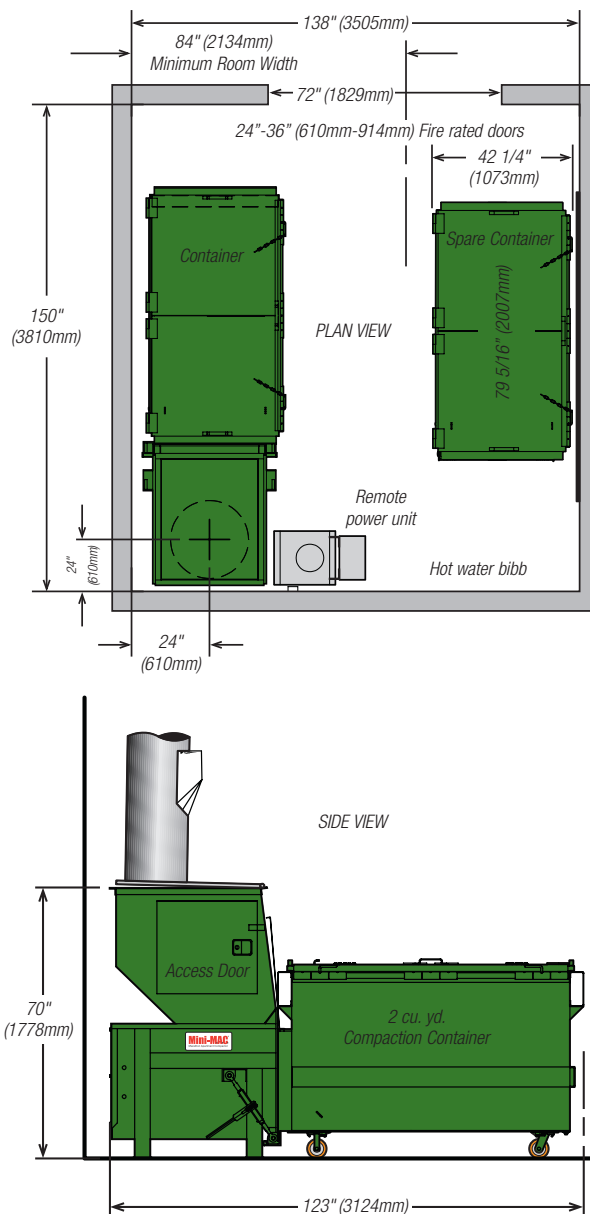

Marathon Equipment Company
P.O. Box 1798
Vernon, AL 35592-1798
800.633.8974
www.marathonequipment.com
NJPA Contract #060612-ESG



Environmental
Solutions Group
A DOVER COMPANY

www.doveresg.com



Pictures in this literature are illustrative only. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Complies with ANSI standard Z245.2, all applicable OSHA Regulations, and certified under WASTEC's Stationary Compactor Certification Program. Products must be used with safe practice and in accordance with said regulations and standards.

