

# TECHNICAL SPECIFICATION LR 64R

				WEIGH	T (LB)
CUST	OMER/VEHICLE	INFO	DESCRIPTION	FRONT	REAR
S	0029V2	CHASSIS (BASE MODEL)	LR 64R DAYCAB	6,447	1,482
S	MP2001	CUSTOMER FLEET SIZE	DEALER FLEET WITH LESS THAN 25 VEHICLES IN OWN FLEET OF ANY VEHICLE BRAND	0	0
S	013001	TYPE OF SERVICE	COMMERCIAL	0	0
S	M98018	WARRANTY REGISTRATION LOCATION	US - WARRANTY REGISTRATION LOCATION	0	0
S	505015	INITIAL REGISTRATION LOCATION	ALL 50 STATES, CARB ENGINE EMISSION (US17 / US21 / ZERO EMISSION)	0	0
S	APPAA3	VEHICLE APPLICATION CLASS	CLASS B HIGHWAY-INNER CITY	0	0
	0050V5	VEHICLE USE & BODY/TRAILER TYPE	REFUSE REAR LOADER TRUCK	0	0
S	032A39	TERRAIN GRADE	NORMAL HIGHWAY, STARTING GRADES<12%	0	0
S	033A10	LOADING SURFACE	CONCRETE LOADING AND / OR UNLOADING SURFACE	0	0
S	0342A4	VEHICLE VOCATION	REFUSE / LANDFILL OPERATION	0	0

				WEIGH	T (LB)
ENGINE/TRANSMISSIONS		ONS	DESCRIPTION	FRONT	REAR
s	1000T0	ENGINE PACKAGE, COMBUSTION	MP7-325M MACK 325HP @ 1400-1900 RPM (PEAK) 2100 RPM (GOV) 1260 LB-FT, US'17	2,633	139
	136AX6	TRANSMISSION	3000 RDS 6-SP ALLISON GEN5 W/PROGNOSTICS, WITH PTO PROVISION	545	181

				WEIGH	T (LB)
EXHA	UST/EMISSION	S	DESCRIPTION	FRONT	REAR
S	DF1041	DEF TANK	6.6 GALLON (25 L) 22" RIGHT SIDE FRAME MOUNTED	0	0
S	130AC7	EXHAUST	SINGLE VERTICAL RIGHT SIDE OUTBOARD MOUNTED STRAIGHT EXH STACK PLAIN END, SIDE OUTLET DIFFUSER	0	0
S	Q0AA1X	EXHAUST SYSTEM MATERIAL FINISH	W/O VERT EXH-BRIGHT FINISH	0	0
	78AC9X	EMISSION ON BOARD DIAG CONTROL	EMISSION OBD, DISPLAY ONLY, USA2021	0	0



				WEIGH	T (LB)
ENGIN	EEQUIPMENT		DESCRIPTION	FRONT	REAR
S	1250C5	AIR CLEANER	13" SINGLE ELEMENT, DRY TYPE W/SNORKEL BEHIND CAB, AIR RESTRICTION INDICATOR ON FILTER	0	0
S	H8XZ1X	WINTERFRONT	W/O BUG SCREEN/WINTER FRONT	-8	3
S	113093	AIR COMPRESSOR/DRYER	WABCO 1800P AIR DRYER W/O TURBO CUT OFF VALVE, W/ WABCO 636 (37.4 CFM) AIR COMPRESSOR	0	0
S	KOXA1X	AIR DRYER POSITION (CA)	AIR DRYER POSITION STANDARD	0	0
S	132AB4	ALTERNATOR	DELCO 12V 130A (24SI) BRUSH-TYPE	16	0
S	316AA6	BATTERIES	(3) MACK 12V 650/1950 CCA THREADED STUD TYPE	0	0
S	393AD9	BATTERY BOX - MOUNTING	PERPENDICULAR TO FRAME 11" FROM NTOF (3 BATTERY MAX)	0	0
S	L5XA1X	BATTERY BOX COVER	MOLDED PLASTIC	0	0
S	318AA3	BATTERY DISCONNECT SWITCH	FLAMING RIVER BIG SWITCH WIRED TO POSITIVE SIDE	0	0
S	NCXA5X	STARTER MOTOR	12 VOLT DELCO 39MT-MXT	31	0
S	118AB8	FAN DRIVE	BEHR FAN AND ELECTRONIC MODULATING VISCOUS FAN DRIVE	0	0
S	119AI9	COOLANT PROTECTION	ETHYLENE GLYCOL FULLY FORMULATED COOLANT (50/50 MIX DYED PINK) TO -34DEG, W/ FILTER	0	0
S	508018	COOLING PERFORMANCE	W/O AUXILIARY COOLING	0	0
	H9XN1X	RADIATOR TYPE	EXTRA NARROW RADIATOR WITH LENGTH 1 (60 DM2)	0	0
S	124AA2	HOSES - RADIATOR/HEATER	SILICONE RADIATOR AND HEATER HOSES	0	0
S	293043	FUEL-WATER SEPARATOR	MACK W/MANUAL DRAIN VALVE W/ HOT RECIRCULATION (INTEGRAL W/ PRIMARY FUEL FILTER)	0	0
S	QHXC1X	OIL PAN	OIL PAN	0	0
	MCA00A	ENGINE HEATERS	NO COLD WEATHER STARTING AIDS PROVIDED	0	0
S	36AB1X	TETHER DEV PKG, CAPS & COVERS	PLASTIC COATED CABLE, MOUNTED FRONT OF EACH BATTERY BOX LENGTH TO ALLOW COVER TO SET ON GROUND	0	0

			WEIGH	IT (LB)	
CLUTCH/TRANS EQUIPMENT		IIPMENT	DESCRIPTION	FRONT	REAR
S	195AA9	DRIVELINE - MAIN	MERITOR 176 MXL "XTENDED LUBE" (PROPS-M)	0	0
S	204AA5	DRIVELINE - INTERAXLE	MERITOR 17 MXL "XTENDED LUBE"	0	0
S	76AA1X	PROPELLR SHAFT MAIN, UNVSL JNT	UNIVERSAL JOINT HALF-ROUND TYPE	0	0
S	8WAAAX	PROP SHAFT INTERAXL UNIV JOINT	HALF-ROUND UNIVERSAL JOINT	0	0
s	139AA7	TRANSMISSION OIL COOLER	ALLISON TRANSMISSION W/DIRECT MOUNT COOLER	0	0

				WEIGH	IT (LB)
FRON	FRONT AXLE EQUIPMENT		DESCRIPTION	FRONT	REAR
S	240AA3	FRONT AXLE	20000# (9100 KG) MACK FXL20 WIDE PIVOT CENTER STRAIGHT SPINDLE/UNITIZED BEARINGS	0	0
S	244AB4	SPRINGS - FRONT	MACK TAPERLEAF 20000# (9100 KG) GROUND LOAD RATING, EQUAL BIAS	0	0
S	241081	FRONT AXLE BRAKES	MERITOR "S" CAM TYPE 16.5" x 6" Q+	0	0
S	U0AA1X	FRONT BRAKE ADJ. MANUFACTURE	HALDEX - AUTOMATIC	0	0
S	V7AD1X	FRONT BRAKE CHAMBER MFG.	FRONT BRAKE CHAMBER MANUFACTURER, MGM	0	0
S	0KXA1X	HUB MATERIAL, FRONT	FERROUS	0	0
S	1KAA1X	SHOCK ABSORBER, FRONT	DOUBLE ACTING TYPE	20	0
S	245AA6	STEERING	M100P PLUS RIGHT SIDE ASSIST CYLINDER	142	0
	2SAZ1X	BUMP STOP, FRONT SUSPENSION	W/O STATIC LOAD CUSHIONS	-15	0



				WEIGH	IT (LB)
REAR	AXLE EQUIPME	NT	DESCRIPTION	FRONT	REAR
S	268AB1	REAR AXLES - TANDEM	38000# (17200kg) MACK S38R FABRICATED STEEL HOUSING	0	1,420
S	6MAA1X	REAR AXLE CASING WIDTH	W/O WIDE TRACK AXLE	0	0
S	018AA6	CARRIER - REAR AXLE	CRDP150/151 AVAILABLE WITH OPTIONAL DRIVER CONTROLLED INTERWHEEL DIFFERENTIAL LOCKS, SEE 254 SYMBOL	0	0
	TAXGHX	REAR AXLE RATIO	3.98 RATIO	0	0
S	1860G6	REAR SUSPENSION - TANDEM	SS38 MACK MULTILEAF (CAMELBACK) 38000# CAPACITY, EXTRA THICK SPRING THICKNESS	0	1,451
	402AA3	SPRINGS - ANTI-SWAY	SPRINGS, ANTI-SWAY	0	106
S	XZXC1X	REAR SUSP. BEAM BUSHINGS	URETHANE	0	9
S	GWXABX	BOGIE SPREAD, REAR	50" AXLE SPACING (BOGIE WHEELBASE)	0	0
S	2AAABX	REAR SPRING INSULATOR MAT'L	URETHANE SHOCK INSULATORS, HEAVY DUTY, HIGHLY RECOMMENDED W/SS582 & SS652 REAR SUSP	0	0
S	XYXB1X	TRANSVERSE TORQUE RODS, R SUSP	TRANSVERSE TORQUE ROD (REAR AXLE ONLY)	0	67
S	253AA4	BRAKES - REAR	MERITOR "S" CAM 16.5"x7" Q+ (Total for QTY = 2)	0	-35
S	U4XA1X	BRAKE, DRIVE, REAR	CAST IRON	0	0
S	U1AA1X	REAR BRAKE ADJ MANUFACTURE	HALDEX - AUTOMATIC	0	0
	V1AB1X	REAR BRAKE CHAMBER SIZE	REAR SPRING BRAKE CHAMBERS 30/30 TYPE	0	0
S	300AB8	REAR BRAKE CHAMBER	MGM TR3030LP3THD BRAKE CHAMBERS (Total for QTY = 2)	0	0
S	3GAA1X	BRAKE CHAMBER DIAPHRAGM MATERIAL (CA)	W/O BRAKE DIAPHRAGM OPTION	0	0
S	0LXI5X	HUB MATERIAL, DRIVE	IRON PRESET REAR HUB W/INTEGRATED SPINDLE NUT	0	0
S	N2AE1X	SPINDLE NUTS, MAIN AXLE	SPINDLE NUTS, MAIN AXLE, INTEGRATED	0	0
S	3LAC1X	POWER DIVIDER LOCKOUT	POWER DIVIDER LOCKOUT, W/BUZZER & LIGHT	0	40
S	7WXA1X	LUBRICANTS, REAR AXLE(s)	FACTORY OPTION LUBE - REAR AXLE	0	0
S	698058	ANTILOCK BRAKE SYSTEM	BENDIX WITHOUT TRACTION CONTROL 4S4M	0	0

				WEIGH	IT (LB)
FRAME	EQUIPMENT/F	UEL TANKS	DESCRIPTION	FRONT	REAR
	271197	WHEELBASE	197"	0	0
	374080	AF (OVERHANG)	80"	0	0
S	MCE0KE	FRAME RAILS & LINERS	9.5 x 82 x 340mm - (0.375" x 3.25" x 13.38"); RBM 2,037,600 LB-IN	0	0
S	281AI1	CROSSMEMBERS	STEEL 1/2" PL BOLTED BOC & INTERMDT 1/8" BELOW TOP OF RAIL	0	0
s	9DEB1X	AUX CROSSM. IN REAR OVERH TYPE	SINGLE CHANNEL WELDED AUXILIARY CROSSMEMBER TYPE	-11	45
S	Q5AA1X	REAR CROSSMEMBER OPTIONS	STEEL CLOSING REAR CROSSMEMBER	0	0
S	4DXA6X	FRONT BUMPER	FLUSH-PAINTED STEEL	0	0
S	5EXF1X	GUARD	SKID PLATE UNDER BUMPER AND RADIATOR	128	-8
S	4EXD1X	TOWING DEVICE, FRONT	CENTER TOW CAPABILITY BASED ON BUMPER SELECTION	0	0
S	2RAA2X	FUEL LEVEL SENDER UNIT, LIQUID	BASIC FUEL LEVEL SENDER MOUNTED ON R.H TANK	0	0
	290AH1	FUEL TANK - RH	70 GALLON (265L) STEEL, 24" ROUND	69	69
	JHXB1X	FUEL HOSES, LIQUID	BRAIDED HOSE	0	0
	HBXA1X	FUEL TANK POSITION (CA)	W/O RELOCATED FUEL TANK(S)	0	0
S	852072	FUEL FILLER NECK OPTIONS	FOR RH FUEL TANK	0	0

					WEIGHT (LB)	
AIR/BRAKE			DESCRIPTION		FRONT	REAR
UWXAE	BX AIRTANK DRAIN VA	LVE	MANUAL DRAIN	VALVES, ALL TANKS, IN MAINFOLD W/LABEL	0	0
PRICELIST DATE	QUOTATION	DATE	PAGE	CUSTOMER NAME	DEALER NAM	E
20210104	BLAN2021000324C626	4/20/2021	3 of 10	NC SHERIFFS' ASSOCIATION INC	TRANSOURCE,	NC.

# MACK®

				WEIGH	T (LB)
AIR/BRAKE			DESCRIPTION	FRONT	REAR
S	U2XB1X	AIRTANK MATERIAL	STEEL	0	0
S	1JAAAX	PARKING BRAKE VALVE	SINGLE VALVE SYSTEM	0	0
S	3KAA1X	AUXILIARY BRAKE CONTROL	AUXILIARY WORK BRAKE HAND CONTROL, ACCESSIBLE FROM RIGHT SIDE ONLY	0	0

				WEIGH	IT (LB)
ELEC.	TRICAL		DESCRIPTION	FRONT	REAR
	5RXZ1X	BACK-UP ALARM	WITHOUT BACK-UP ALARM	0	-2
S	312006	<b>ROOF &amp; SIDE MARKER LIGHTS</b>	TRUCKLIGHT TYPE ROOF MARKER for LR	0	0
	LJXABX	HEADLAMP BULB TYPE	HEADLAMP BULB TYPE, HALOGEN	0	0
S	LSXH2X	DAYTIME RUNNING LIGHTS	ENGINE RUNNING ACTIVATED	0	0
S	M4XAAX	AUX. POWER OUTLET, INTERIOR	COMPUTER AND 2-WAY RADIO DEDICATED CIRCUIT	0	0
S	3BCB1X	FRONT & SIDE INDICATOR LMP TYP	FRONT AND SIDE DIRECTION IND & MARKER, LED TYPE	3	0

				WEIGH	IT (LB)
PTO			DESCRIPTION	FRONT	REAR
	5XXZ1X	PTO TRANSMISSION MOUNTED ADM.	WITHOUT PTO TRANSMISSION	0	0
S	L3XN1X	BODY BUILDER MODULE	ControlLink III BODY BUILDER EL PREP KIT, REFUSE, RP170 ELECT. INTERFACE (3 CON 54 PINS)	0	0

				WEIGH	T (LB)
SPE	CIALTY EQUIPM	ENT	DESCRIPTION	FRONT	REAR
S	8FXU1X	TRANSPORT ADAPTATION	UNIFORM LOAD NO ADAPTATION	0	0

				WEIGH	T (LB)
CAB INTERIOR (A THRU G)		IRU G)	DESCRIPTION	FRONT	REAR
S	75AA1X	CAB HEATER UNIT	STD HEATER	0	0
S	4AXB1X	CLIMATE UNIT	MACK INTEGRAL W/HEATER (COMBO HEATER/AIR CONIDITIONER UNIT) W/R134a REFRIGERANT	93	0
S	1PAZ1X	CAMERA, SURVEILLANCE	WITHOUT CAMERA	0	0
S	31XABX	FLOOR MATS	FLOOR MAT, RUBBER	0	0
S	E0AABX	GAUGE - TRANSMISSION OIL TEMP	TRANSMISSION GAUGE AND TRANS. OIL HIGH TEMPERATURE LIGHT	0	0
S	198048	GAUGES - UNIT OF MEASURE	U.S. UNITS (PREDOMINANT)	0	0

					WEIGH	T (LB)
CAB INTERIOR (H THRU R)		IRU R)	DESCRIPTION	FR	RONT	REAR
S	20XA1X	KEY TYPES FOR DOORS	BASIC UNIQUE KEY		0	0
S	1WAA1X	POWER LEADS	POWER LEADS (5-WAY BINDING POSTS FOR CB RADIO) MOUNTED ON TOP OF DASH		0	0

					IT (LB)
CAB INTERIOR (S THRU Z)			DESCRIPTION	FRONT	REAR
S	196096	SEAT - DRIVER'S	AIR-SEARS MID-BACK SEAT C-2 W/FABRIFORM CUSHIONS	0	0

PRICELIST DATE	QUOTATION	DATE	PAGE	CUSTOMER NAME	DEALER NAME
20210104	BLAN2021000324C626	4/20/2021	4 of 10	NC SHERIFFS' ASSOCIATION INC	TRANSOURCE, INC.



				WEIGH	T (LB)
CAB INTERIOR (S THRU Z)		IRU Z)	DESCRIPTION	FRONT	REAR
S	1970B7	SEAT - PASSENGER'S	FOLD-UP SEARS SEATING, LOW BACK PASSENGER SEAT	0	0
S	4850F5	SEAT COVERING	DRIVER- FABRIFORM CLOTH, BLACK RIDER- CLOTH, BLACK	0	0
S	592042	SEAT BELT(S)	SEAT BELTS (ORANGE)/RETRACTORS, LAP AND SHOULDER FOR DRIVER AND LAP BELT FOR FOLD-UP RIDER SEAT	0	0
S	2WXAAX	STEERING WHEEL	TWO SPOKE URETHANE GRIP CHARCOAL SPOKES	0	0
S	XRXF1X	STEERING WHEEL ADJUSTMENT	ADJUSTABLE LH STEERING WHEEL RH FIXED	0	0
S	NPXB1X	TURN SIGNALS	SELF CANCELLING TURN SIGNALS	0	0
S	JQXAAX	WASHER RESERVOIR POSITION	W/O WINDSHIELD WASHER OPTION	0	0
S	T2AA1X	WINDSHIELD PROTECTOR	FURNISH WINDSHIELD PROTECTOR	16	0

				WEIGH	T (LB)
CAB E	XTERIOR		DESCRIPTION	FRONT	REAR
S	28XD1X	FRONT GRILLE	LR BLACK GRILLE WITH BLACK SURROUND	0	0
S	14400Q	САВ	LH DRIVE WITH RH STAND UP OPERATING POSITION, EXTENDED CAB VERSION	0	0
	42400A	CAB DOOR OPTIONS	LH FRONT HINGED DOOR W/PWR WINDOW, RH REAR FOLD UP W/ FIXED WINDOW	0	0
S	2EXA1X	CAB TILT PUMP	LOCATED IN STD LOCATION	0	0
S	Q2AA1X	CAB INSTEP VERSION	Cab Low Entry Step	0	0
S	MCD01D	PASSENGER SIDE VISIBILITY OPTIONS	WITHOUT AUXILIARY WINDOW IN RH DOOR WITHOUT SIDE CLOSE VIEW MIRROR	0	0
S	LXXC1X	HORN - ELECTRICAL	SINGLE TONE	0	0
S	MCL0FL	MIRRORS - LEFT SIDE EXTERIOR	LH BLACK AERO MIRROR ELECTRICAL OPERATED & HEATED, W/ HEATED SQUARE BLACK CLOSE VIEW	0	0
S	MCR0CR	MIRRORS - RIGHT SIDE EXTERIOR	RH BLACK AERO MIRROR ELECTRICAL OPERATED & HEATED, W/ HEATED SQUARE BLACK CLOSE VIEW	0	0

					IT (LB)
WHE	ELS & TIRES		DESCRIPTION	FRONT	REAR
S	4WCC1X	GHG STEER TIRE CATEGORY (PAWS)	LOW ROLLING RESISTANCE, BETTER FUEL ECONOMY	0	0
s	9004Y0	TIRES BRAND/TYPE - FRONT	315/80R22.5 L BRIDGESTONE M870 (20000 lbs) (Total for QTY = 2)	336	0
S	531221	WHEELS - FRONT	22.5x9.00 ACCURIDE WHITE POWDER COAT STEEL,7.00" OFFSET, 5 HAND HOLE (Total for QTY = 2)	217	0
S	FWT002	FRONT AXLE TIRE & WHEEL QUANTITY	TWO FRONT TIRES & WHEELS	0	0
s	4XCC1X	GHG DRIVE TIRE CATEGORY (PAWS)	LOW ROLLING RESISTANCE, BETTER FUEL ECONOMY	0	0
s	901AX1	TIRES BRAND/TYPE - REAR	11R22.5 G BRIDGESTONE R268 ECOPIA (23360 lbs) (ALL POSITION) (Total for QTY = 8)	0	971
S	3462J6	WHEELS - REAR	22.5x8.25 ACCURIDE ACCU-LITE WHITE POWDER COAT STEEL, 6.60" OFFSET, 5 HAND HOLE (Total for QTY = 8)	0	547
S	RWT008	REAR AXLE TIRE & WHEEL QUANTITY	EIGHT REAR AXLE TIRES & WHEELS	0	0
s	H1EB1X	DRIVE WHEEL STUDS	DRIVE WHEEL STUDS LONGER LENGTH	0	0
s	15XABX	TIRE INFLATION VALVE	STANDARD VALVE STEMS AND CAPS	0	0

				WEIGH	IT (LB)
COMMUNICATION SYSTEMS		/STEMS	DESCRIPTION	FRONT	REAR
s	Y7CA1X	DIAGNOSTICS DISPLAY IN CLUSTER	DIAGNOSTICS DISPLAY IN CLUSTER, BASIC	0	0
S	M30060	TELEMATIC GATEWAY	TELEMATICS GATEWAY, 4G/LTE AND WLAN SYSTEM WITH DIAGNOSTIC SERVICES	0	0
	2JCA1X	REMOTE DIAG SERVICES	REMOTE DIAGNOSTIC SERVICES, ENABLED	0	0

PRICELIST DATE	QUOTATION	DATE	PAGE	CUSTOMER NAME	DEALER NAME
20210104	BLAN2021000324C626	4/20/2021	5 of 10	NC SHERIFFS' ASSOCIATION INC	TRANSOURCE, INC.



				WEIGH	IT (LB)
ENGIN	E ELECTRONIC	CS	DESCRIPTION	FRONT	REAR
S	WOXA1X	OIL PRESSURE, ENGINE SHUTDOWN	OIL PRESSURE, ENGINE SHUTDOWN	0	0
S	WMXA1X	COOLANT TEMP, ENGINE SHUTDOWN	COOLANT TEMP, ENGINE SHUTDOWN	0	0
S	K5XA2X	ENGINE PROTECTION SYSTEM	ENGINE PROTECTION (SHUTDOWN)	0	0
S	K7XH3X	ENGINE IDLE CONTROL	IDLE CONTROL, 650 RPM	0	0
S	X0AB0X	SMART IDLE ELEVATED IDLE RPM TIME	INCREASE 10 MINUTE MAXIMUM TIME	0	0
S	M3CA1X	IDLE S/D ABS TAMPER CHECK	IDLE SHUTDOWN ABS TAMPER CHECK, ENABLED	0	0
S	B1ACAX	IDLE S/D WARNING TIME	30 SEC IDLE S/D WARNING TIME	0	0
S	A8AALX	IDLE S/D IF WARM-UP TEMP	38C DEG (100F), WARM UP TEMP DELAY	0	0
S	A4AAEX	IDLE S/D WARM-UP TIMER	5 MIN. WARM UP TIME DELAY	0	0
S	A6AABX	IDLE S/D IF PTO ACTIVE	ENGINE IDLE SHUTDOWN TIME OVERRIDDEN IF PTO ACTIVE	0	0
S	<b>B0AAAX</b>	IDLE SHUTDOWN IF POWER > LIMIT	ENG IDLE SHUTDOWN TIME OVERRIDDEN IF TORQUE > THAN LIMIT	0	0
S	D2AADX	AMBIENT TEMP MIN TRESHOLD	AMBIENT TEMP MIN TRESHOLD, 10 DEG C, (50 DEG F)	0	0
S	D3AAEX	AMBIENT TEMP MAX TRESHOLD	AMBIENT TEMP MAX TRESHOLD, 27 DEG C, (80 DEG F)	0	0
S	<b>B3ABAX</b>	EL HD THROTTLE,MAX ROAD SPEED	ELECTRONIC HAND THROTTLE, MAX ROAD SPEED, 16 KMH (10 MPH)	0	0
S	B6ACEX	EL HAND THROTTLE, MAX ENG SPEED	ELECTRONIC HAND THROTTLE, MAX ENGINE SPEED, 2100 RPM	0	0
S	B4ADAX	EL HAND THROTTLE,MIN ENG SPEED	ELECTRONIC HAND THROTTLE, MIN ENGINE SPEED, 700 RPM	0	0
S	<b>B9AABX</b>	EL HD THROTTLE,SPEED RAMP RATE	ELECTRONIC HAND THROTTLE, SPEED RAMP RATE, 100 RPM/SEC	0	0


				WEIGH	IT (LB)
TRANSMISSION ELECTRONICS		CTRONICS	DESCRIPTION	FRONT	REAR
S	7790Z9	TRANSMISSION ELECTRONICS PACKAGE	GENERAL REFUSE SERVICE (168) - LIMITED TO 2ND GEAR IN SECONDARY MODE (RH DRIVING POSITION)	0	0
	B1EC1X	TRANSM AUTO NEUTRAL ON P- BRAKE	ALLISON PARK BRAKE AUTO NEUTRAL-ALLOWS THE DRIVER TO ENGAGE GEAR PRIOR TO DISENGAGING THE PARK BRAKE	0	0
S	MAV01V	TRANSMISSION ELECTRONIC SHIFTING PROPERTIES	W/O ALLISON FUELSENSE 2.0 PROGRAMMING	0	0

					WE	IGHT (LB)
VEHICLE ELECTRONICS		DESCRIPTION		FRONT	REAR	
S	JCXE6X	ROAD SPEED LIMITER SETTING	105 KM/H ROAD S	PEED LIMITER(65 MPH)	0	0
S	Y3CC5X	PEDAL RSL SETTING	105 KM/H PEDAL F	ROAD SPEED LIMITER (65MPH)	0	0
S	JDXA1X	CRUISE CONTROL	CRUISE CONTROI		0	0
S	JFXLLX	CRUISE CONTROL, MAX SPEED	MAX CRUISE, 105	KPH (65 MPH)	0	0
S	E3AACX	CRUISE CONTROL MIN SPEED	MIN CRUISE, 32 K	РН (20 МРН)	0	0
S	L2CA1X	PDLO ENGAGED VLS	POWER DIVIDER I (5MPH)	OCK OUT (PDLO) ROAD SPEED LIMIT 8KI	MH 0	0
S	A4BAAX	DETECTION SPEED SENSR TMPRNG	DETECTION OF SI	PEED SENSOR TAMPERING, ENABLE	0	0
S	8RXAEX	ENG TORQUE LIMIT, SPEED SENSOR	ENG TORQUE LIM DETECTED	ITED TO 50%, IF SPEED SENSOR TAMPER	۲ ٥	0
S	G5AAHX	ENGINE OVERSPEED,ALL COND, LOG	ENGINE OVERSPE RPM	ED, ALL CONDITIONS, TIME LOG IF ABOV	/E 2200 0	0
S	G2AAGX	ENGINE OVERSPEED,FUELED, LOG	ENGINE OVERSPE	ED, FUELED, TIME LOG IF ABOVE 2100 R	PM 0	0
s	G4AAUX	VEHICLE OVERSPEED, ALL COND, LOG	VEHICLE OVERSP (121KMH)	EED,ALL COND, TIME LOG IF ABOVE 75M	PH 0	0
S	<b>G3AAPX</b>	VEHICLE OVERSPEED, FUELED, LOG	VEHICLE OVERSP (113KMH)	EED, FUELED, TIME LOG IF ABOVE 70MPI	Н 0	0
S	G1AABX	ENGINE IDLE DELAY TO LOG	ENGINE IDLE DEL	AY TO START LOG, 2 MIN	0	0
S	W9A01X	PERIODIC TRIP LOG DAY OF MONTH	PERIODIC TRIP LC	OG, DAY 1 OF THE MONTH	0	0
			DACE			

s

s

s

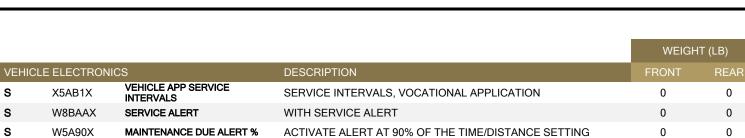

				WEIGH	T (LB)
PTO E	LECTRONICS		DESCRIPTION	FRONT	REAR
S	F3AAEX	PTO1 SINGLE SPEED CONTROL RPM.	PTO 1ST, SINGLE SPEED SETTING, 1000 RPM	0	0
S	F5AABX	PTO 1ST, MAX ROAD SPEED	1ST PTO, MAX ROAD SPEED, 10 MPH (16 KPH)	0	0
S	F6AABX	PTO 1ST, SPEED RAMP RATE	PTO 1ST, SPEED RAMP RATE 100 RPM/SEC	0	0
S	F7AAPX	PTO 1ST, MAX ENGINE SPEED	PTO 1ST, MAX ENGINE SPEED, 2100 RPM	0	0
S	F8AAGX	PTO 1ST, ROAD SPEED LIMIT	PTO 1ST, ROAD SPEED LIMIT, 97 KMH (60 MPH)	0	0
S	F9AABX	PTO 1ST, MINIMUM ENGINE SPEED	PTO 1ST, MINIMUM ENGINE SPEED, 600 RPM	0	0
S	L8CB1X	PTO1 DECEL BUMP-DOWN RPM	PTO1 DECEL "BUMP-DOWN" 50RPM	0	0
S	H6AAEX	PTO 2ND, SINGLE SPEED SETTING	PTO 2ND, SINGLE SPEED SETTING, 1000 RPM	0	0
S	H0AABX	PTO 2ND, MAX ROAD SPEED	2ND PTO, MAX ROAD SPEED, 10 MPH (16 KPH)	0	0
S	G9AABX	PTO 2ND, SPEED RAMP RATE	PTO 2ND, SPEED RAMP RATE 100 RPM/SEC	0	0
S	H7AANX	PTO 2ND, MAX ENGINE SPEED	PTO 2ND, MAX ENGINE SPEED, 2100 RPM	0	0
S	H5AAGX	PTO 2ND, ROAD SPEED LIMIT	PTO 2ND, ROAD SPEED LIMIT, 97 KMH (60 MPH)	0	0
S	G8AABX	PTO 2ND, MINIMUM ENGINE SPEED	PTO 2ND, MINIMUM ENGINE SPEED, 600 RPM	0	0

				WEIGH	IT (LB)
PAINT			DESCRIPTION	FRONT	REAR
S	950AA4	PAINT DESIGN	SINGLE COLOR	0	0
S	924014	PAINT TYPE	SOLID PAINT	0	0
	944DR8	PAINT COLOR - FIRST COLOR	WHITE; L0006	0	0
S	945998	PAINT COLOR - SECOND COLOR	NO SECOND TRUCK COLOR PROVIDED; NO COLOR	0	0
S	946998	PAINT COLOR - THIRD COLOR	NO THIRD TRUCK COLOR PROVIDED; NO COLOR	0	0
S	MPB944	CAB COLOR	SAME AS FIRST COLOR - CAB	0	0
S	996AA3	PAINT - CAB PAINT SYSTEM	PAINT - CAB, URETHANE CLEAR COAT	0	0
	922001	CHASSIS RUNNING GEAR PROCESS CODE	CHASSIS PAINT PROCESS, STANDARD COLOR (MACK BLACK) 6ABZ1X	0	0
S	951AA6	CHASSIS RUNNING GEAR	MACK BLACK (URETHANE)	0	0
S	958018	BUMPER	PAINT BUMPER SAME COLOR AS CHASSIS RUNNING GEAR	0	0
S	959069	FUEL TANK - ***NO INVENTED VARIANTS ALLOWED in the FUEL TANK PAINT FAMILY***	PAINT FUEL TANK SAME COLOR AS CHASSIS RUNNING GEAR	0	0
S	962032	HUBS & DRUMS-FRONT	SAME AS CHASSIS RUNNING GEAR	0	0
S	963033	HUBS & DRUMS-REAR	SAME AS CHASSIS RUNNING GEAR	0	0

				WEIGH	IT (LB)
CALCU	JLATED CODES	S - KAX	DESCRIPTION	FRONT	REAR
S	9JXA1X	PROPCALC SELECTION	YES, THE ORDER MUST BE CALCULATED	0	0

MACK



				WEIGH	T (LB)
BASE	WARRANTY &	PURCHASED COVERAGES	DESCRIPTION	FRONT	REAR
S	898003	VEHICLE WARRANTY TYPE	HEAVY DUTY WARRANTY CLASSIFICATION	0	0
S	M50030	BASIC CHASSIS COVERAGE	HEAVY DUTY STANDARD BASE COVERAGE 12 MONTHS/100,000 MILES (161,000 KM)	0	0
S	M51021	ENGINE WARRANTY	MACK MP7/MP8 BASE ENGINE COVERAGE 24 MONTHS / 250,000 MILES (402,000KM)	0	0
S	M52022	EMISSION COMPONENT COVERAGE	US and CANADA EQUIPPED VEHICLE EMISSION COMPONENTS COVERAGE 60 MONTHS/100,000 MILES (161,000 KM)	0	0
S	M540B4	TRANSMISSION WARRANTY	ALLISON TRANSMISSIONS (Contact Allison Transmission for standard warranty and extended coverage data	0	0
S	M550G7	CARRIER & AXLE HOUSING WARRANTY	STANDARD MACK HEAVY DUTY COVERAGE 60 MONTHS / 500,000 (804,672 KM)	0	0
S	M56026	AIR CONDITIONING WARRANTY	AIR CONDITIONING STANDARD COVERAGE (Sealed System Only) 12 MONTHS UNLIMITED MILEAGE	0	0
S	M57027	CHASSIS TOWING WARRANTY	STANDARD NORMAL / HEAVY DUTY CHASSIS TOWING 90 DAYS OR 5,000 MILES	0	0
S	M58028	ENGINE TOWING WARRANTY	STANDARD MACK ENGINE TOWING COVERAGE 24 MONTHS/250,000 MILES (402,000 KM)	0	0
S	M690F9	GUARDDOG CONNECT BUNDLE	24 MONTH - GUARDDOG CONNECT WITH MACK OTA (with ASIST and Mack OneCall))	0	0
s	M78010	PREPAID API	WITHOUT PREPAID API	0	0
S	M67017	PREMIUM MAINTENANCE - CHASSIS LUBE AND INSPECTION	W/O PREMIUM MAINTENANCE - CHASSIS LUBE AND INSPECTION COVERAGE	0	0


FRONT / REAR AXLE WEIGHTS (LB)

TOTAL WEIGHT (LB)

10653 6478 17130




VEHICLE SPECIFICATION/CALCULATED PERFORMANCE SUMMARY						
Description	Sales Code	Dwg Ref	Length	UOM		
Front Frame Extension	N/A	FE	0.0	INCHES		
Bumper to Front Axle	N/A	BA	69.9	INCHES		
Wheelbase	N/A	WB	197.0	INCHES		
Rear Overhang	N/A	ОН	79.9	INCHES		
Overall Length	N/A	OL	346.9	INCHES		
Bumper to Back of Cab	N/A	BBC	64.6	INCHES		
Eff. Bumper to Back of Cab	N/A	EBBC	94.6	INCHES		
Eff. Cab to Rear Axle	N/A	ECA	172.3	INCHES		
Eff. Front Axle to Back of Cab	N/A	EAC	24.7	INCHES		
Eff. Cab to End of Frame	N/A	ECEF	252.2	INCHES		
Unladen 5th Wheel Height	E5BZ1X	5W	0.0	INCHES		
Unladen Frame Height	N/A	FH	42.5	INCHES		
Cab Height	N/A	СН	56.1	INCHES		
Overall Height	N/A	OVH	98.6	INCHES		
Driver CG	N/A	DCG	13.8	INCHES		
50" AXLE SPACING (BOGIE WHEELBASE)	GWXABX	BS	50.0	INCHES		
Second Front Axle Spacing		SFAS	0.0	INCHES		

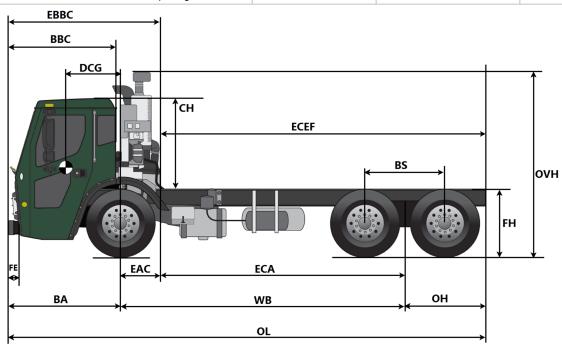



VEHICLE SPECIFICATION/CALCULATED PERFORMANCE SUMMARY						
Description	Sales Code	Dwg Ref	Left Value(in)	Right Value(in)		
Wheelbase	N/A	WB	197.0	197.0		
Available Rail Space Right	N/A	ARSR	N/A	59.0		
Available Rail Space Left	N/A	ARSL	123.3	N/A		
Eff. Front Axle to Back of Cab	N/A	REF	24.7	24.7		
Front Axle To Fender	ABXLYX	N/A	28.0	28.0		
Battery Box	393AD9	N/A	0.0	18.0		
WITHOUT LH FUEL TANK / 70 GALLON (265L) STEEL, 24" ROUND	288AA1 / 290AH1	N/A	0.0	40.3		
Ad-Blue Tank	DF1041	N/A	0.0	6.0		
Drive Tire Radius	901AX1	N/A	20.7	20.7		

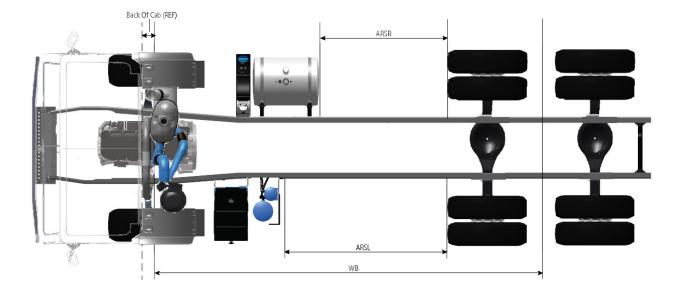

Top View image is intended for illustration purposes only and is not presented to scale. Wheelbase, Axle Spacing and After frame are not shown as specified, but are a representation. Customer Adaptation (CA) options and relocated components are not represented in these images. Most CA options impact the variation of the image, thus an image may not populate. Calculations are approximate to a tolerance of ± 4 inches due to component mounting variation. Certain chassis component options are NOT represented in the Top View image, such as, but not exclusive to, Front Frame Extensions, Fuel Water Separators, Air Dryers, PTOs, Fifth Wheels, Chassis Fairings, Toolboxes, Trailer Connections. For further information on these items and their respective locations on your specification, please refer to the data sheets associated with those items in the configurator.

