


Dynapac D25T


Highway pavers





- Lower TCO with rugged design and extended wear parts life
- Award winning Mat Master screed for high quality results
- Simplified smart paving with Dynapac PaveManager
- iTrack system providing excellent traction & reliability
- Innovative solutions for non-stop paving (Safe Impact, Fail Safe heating)
- Designed and built in USA for North American Market


Technical Data


|  Masses | |
|--|------------|
| Tractor weight | 31,600 lbs |
| Tractor weight including Mat Master screed | 37,950 lbs |


|  Capacity | |
|---|--------|
| Transport width | 109 in |
| Total length | 255 in |
| Transport height | 126 in |
| Max working width | 20 ft |
| Basic screed width | 8 ft |
| Placement thickness (max) | 12 in |


|  Undercarriage | |
|---|--|
| Track length | 99 in |
| Track width | 14 in |
| Drive | Hydrostatic final drivers, integrated in track frame |
| Paving speed | up to 283 fpm |
| Transport speed | up to 9.3 mph |

|  Operation stations | |
|--|--|
| Control consoles | Dual swing out operator consoles |
| Dashboard | 2 fully functional tractor consoles with display |

|  Engine | |
|--|-------------------|
| Manufacturer/Model | Cummins QSB 4.5 |
| Rated power | 173 hp @ 2200 Rpm |
| Emissions according to | Tier 4F |
| Electrical system | 12 V / 130 Amp |
| Fuel tank capacity | 47.50 gal |

|  Material hopper | |
|---|----------|
| Capacity | 10 t |
| Hopper width | 124 in |
| Dumping height | 21.50 in |

|  Conveyor | |
|--|---|
| Conveyor type | Dual bar feeder |
| Conveyor width | 2 x 21.75 in |
| Conveyor control | 2 independent conveyors with proportional speed control |
| Reversible | Yes |

|  Auger | |
|---|--|
| Auger diameter | 17 in |
| Auger control | 2 independent augers with proportional speed control |
| Auger height adjustment | Hydraulic |
| Reversible | Yes |

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.


dynapac_d25t_us-20211221.080911.pdf 2021-12-21 08:09

Dynapac D25T


Highway pavers



Technical Data

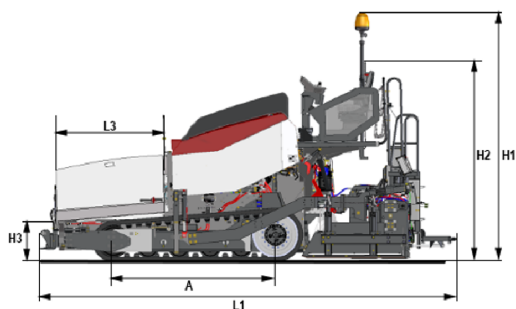

| Dimensions | |
|-----------------------------|--------|
| A. Axle track | 99 in |
| B1. Width, max. | 136 in |
| B2. Width, standard | 109 in |
| B3. Width, center of tracks | 79 in |
| H1. Height, max. | 139 in |
| H2. Height, transport | 126 in |
| H3. Height Dumping | 22 in |
| C1. Track width | 14 in |
| L1. Length | 255 in |
| L3. Length, hopper | 71 in |

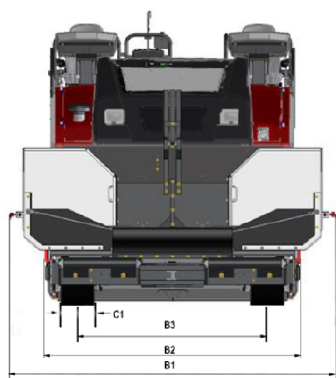

| Suitable screeds | | | | | | |
|------------------|-------------|-----------------------|---------------------|---------------------|----------------|----------|
| Model | Basic width | Hydr.Extendable up to | Working width, max. | Compacting elements | Heating system | Weight |
| Mat Master 16R | 8 ft | 16 ft | 20 ft | Vibration | Electric | 6350 lbs |

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

dynapac_d25t_us-20211221.080911.pdf 2021-12-21 08:09