


# Dynapac D30T


## Highway pavers





- Lower TCO with rugged design and extended wear parts life
- Award winning Mat Master screed for high quality results
- Simplified smart paving with Dynapac PaveManager
- iTrack system providing excellent traction & reliability
- Innovative solutions for non-stop paving (Safe Impact, Fail Safe heating)
- Designed and built in USA for North American Market


### Technical Data


 Masses	
Tractor weight	37,300 lbs
Tractor weight including Mat Master screed	45,200 lbs


 Capacity	
Transport width	133 in
Total length	264 in
Transport height	120 in
Max working width	30 ft
Basic screed width	10 ft
Placement thickness (max)	12 in


 Undercarriage	
Track length	113.5 in
Track width	18 in
Drive	Hydrostatic final drive, integrated in track frame
Paving speed	up to 246 fpm
Transport speed	up to 9.84 mph

 Operation stations	
Control consoles	Dual Swing out operator consoles
Dashboard	2 fully functional tractor consoles with display

 Engine	
Manufacturer/Model	Cummins QSB 6.7
Rated power	225 hp @ 2200 RPM
Emissions according to	Tier 4 F
Electrical system	12 V / 130 Amp
Fuel tank capacity	84 gal

 Material hopper	
Capacity	14 t
Hopper width	132.8 in
Dumping height	22 in

 Conveyor	
Conveyor type	Dual bar feeder
Conveyor width	2 x 22.25 in
Conveyor control	2 independent conveyors with proportional speed control

 Auger	
Auger diameter	17 in
Auger control	2 reversible augers with proportional speed control
Auger height adjustment	Hydraulic

Find us locally at [www.dynapac.us](http://www.dynapac.us)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.


dynapac\_d30t\_us-20211221.114909.pdf 2021-12-21 11:49

# Dynapac D30T


## Highway pavers



### Technical Data

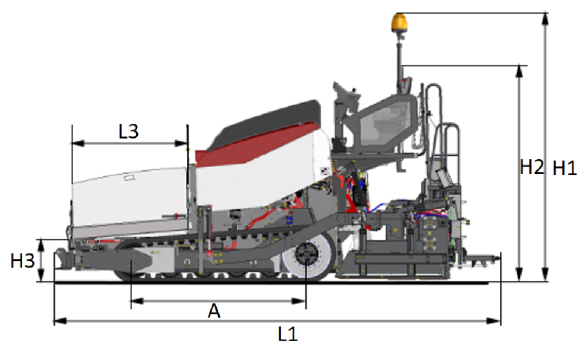

Dimensions	
A. Axle track	113 in
B1. Width, max.	132.5 in
B2. Width, standard	132.5 in
B3. Width, center of tracks	96 in
H1. Height, max.	134.5 in
H2. Height, transport	120 in
H3. Height Dumping	22 in
L1. Length	264 in
L3. Length, hopper	80 in
C1. Track width	18 in

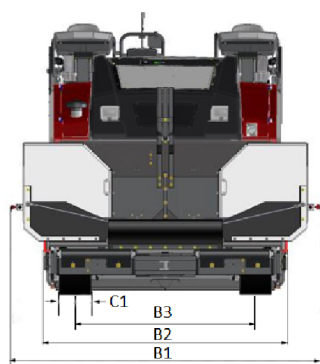

Suitable screeds						
Model	Basic width	Hydr.Extendable up to	Working width, max.	Compacting elements	Heating system	Weight
Mat Master 20R	10 ft	20 ft	30 ft	Vibration	Electric	7900 lbs

Find us locally at [www.dynapac.us](http://www.dynapac.us)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac\_d30t\_us-20211221.114909.pdf 2021-12-21 11:49