

CUSTOMER PROPOSAL

**PREPARED FOR**

NORTH CAROLINA SHERIFF ASSOCIA
323 W Jones St
RALEIGH
NC 27603-1365

DATE

3/17/2022

PREPARED BY

SHEALY TRUCK CENTER OF THE PIEDMONT,
INC
331 MIDPOINT BLVD
DUNCAN
SC 29334

QUOTE INFORMATION

SHEA2022000080C697
ANTHEM 64R DAYCAB
Qty: 1



SHEALY TRUCK CENTER
"Quality Without Compromise"



TECHNICAL SPECIFICATION

ANTHEM 64R DAYCAB



APPLICATION PACKAGES		DESCRIPTION
MPK1AK	CHASSIS CONFIGURATION PACKAGE	ONEBOX EATS, LH BATTERY BOX (4 BATTERIES), 11.8 GALLON (45L) DEF, SINGLE 26" LH FUEL TANK

CUSTOMER/VEHICLE INFO			DESCRIPTION
S	002972	CHASSIS (BASE MODEL)	ANTHEM 64R DAYCAB
S	99X93X	ASSEMBLY PLANT	Made in Macungie, PA USA
	MP2001	CUSTOMER FLEET SIZE	DEALER FLEET WITH LESS THAN 25 VEHICLES IN OWN FLEET OF ANY VEHICLE BRAND
S	013001	TYPE OF SERVICE	COMMERCIAL
S	M98018	WARRANTY REGISTRATION LOCATION	USA - WARRANTY REGISTRATION LOCATION
	MBT01T	EMISSION WARRANTY CERTIFICATION	EPA (only) for Mack MP7 / MP8 Diesel
S	5050B5	INITIAL REGISTRATION LOCATION	USA REGISTRATION
S	534014	LANGUAGE-PUBS/DECAL/SIGNS	ENGLISH
	005155	VEHICLE USE & BODY/TRAILER TYPE	FREIGHT- LOCAL TRUCK
	2KEZ1X	TRAILER TYPE	WITHOUT TRAILER TYPE
S	78XB1X	TRANSPORT CYCLE	LOCAL DISTRIBUTION
S	DKX99X	GROSS COMBINATION WEIGHT (CA in PC29 only)	TRUCK ONLY - NO TRAILER TOWING PROVISIONS PROVIDED
S	70BB1X	BRAKE REGULATION	BRAKE REGULATION, STOPPING DISTANCE 94M (310FT)
	QCXA1X	TOPOGRAPHY	GRADES <3% GREATER THAN 98% OF DRIVING DISTANCE MAX GRADE 8%
S	E1BD1X	AMBIENT TEMP UPPER LIMIT (GTA)	AMBIENT TEMPERATURE HOT. WARMER THAN 104 F (40 C) ALLOWED UP TO 25 HOURS PER YEAR
S	032A79	TERRAIN GRADE	ON HIGHWAY, STARTING GRADES<16%
S	033A10	LOADING SURFACE	CONCRETE LOADING AND / OR UNLOADING SURFACE
	0341A1	VEHICLE VOCATION	LINEHAUL / LONG HAUL SERVICE

ENGINE/TRANSMISSIONS			DESCRIPTION
S	1000P0	ENGINE PACKAGE, COMBUSTION	MP7-345C MACK 345HP @ 1450-1700 RPM (PEAK) 1950 RPM (GOV) 1360 LB-FT, US'17
S	Q1CA1X	GEAR SELECTION TUNING	BASIC, GEAR-SELECTION TUNING
S	3GCB1X	GHG APPLICATION, VEHICLE	GREEN HOUSE GAS VOCATIONAL APPLICATION
	136AH0	TRANSMISSION	FULLER FR-15210B (14.80/1.00)
S	V4EZ9X	GEARBOX 12TH GEAR LOCK-OUT	WITHOUT 12TH GEARBOX GEAR LOCK-OUT

EXHAUST/EMISSIONS			DESCRIPTION
	CIRAA2	CARB 2008 IDLE REGULATION	IDLE EMISSION CERTIFICATION, BASIC
S	DPF04F	DPF DIESEL PARTICULATE FILTER	CLEARTECH ONE BOX E.A.T.S. RH SIDE UNDER CAB US17 / US21
S	MCF01F	CHASSIS MOUNTED EMISSIONS FINISH	PAINTED DEF & DPF COVER
	DF10M1	DIESEL EXHAUST FLUID TANK	11.8 GALLON (45 L) 22" LEFT SIDE FRAME MOUNTED
	130AA9	EXHAUST	UNDERFRAME RIGHT SIDE INBOARD MOUNTED
S	Q0AA1X	EXHAUST SYSTEM MATERIAL FINISH	W/O BRIGHT FINISH EXHAUST
	78ADAX	EMISSION ON BOARD DIAG CONTROL	EMISSION OBD, DISPLAY ONLY, USA2022

ENGINE EQUIPMENT			DESCRIPTION
S	125045	AIR CLEANER	UNDER HOOD SINGLE ELEMENT DRY TYPE W/AIR INTAKE FROM BOTH SIDES OF HOOD
S	121AA5	BUG SCREEN	BLACK ALUMINUM BUG SCREEN MOUNTED BEHIND GRILLE, WITHOUT WINTER FRONT COVER
S	1130L3	AIR COMPRESSOR/DRYER	WABCO AIR DR SS-HP AIR DRYER W/ WABCO 318 (18.7 CFM) AIR COMPRESSOR

TECHNICAL SPECIFICATION *(cont.)*



ENGINE EQUIPMENT			DESCRIPTION
S	KOXA1X	AIR DRYER POSITION (CA)	AIR DRYER POSITION STANDARD
S	132AB9	ALTERNATOR	DELCO 12V 160A (28SI) BRUSH-TYPE
S	316AA6	BATTERIES	(3) MACK 12V 650/1950 CCA THREADED STUD TYPE
S	393AC3	BATTERY BOX - MOUNTING (x)	LH RAIL UNDER CAB, PARALLEL TO FRAME W/STEPS, W/AIR RESERVOIR MOUNTED BELOW (4 BATTERY MAX)
S	L5XA1X	BATTERY BOX COVER	MOLDED PLASTIC
S	NCXA5X	STARTER MOTOR	12 VOLT DELCO 39MT-MXT
S	JMxB1X	ENGINE BRAKE LIGHTING (CA)	VEHICLE AND TRAILER (IF APPLICABLE) STOP LAMPS ACTIVATE UPON SERVICE BRAKE APPLICATION ONLY(3899000)
S	118AB8	FAN DRIVE	BEHR FAN AND ELECTRONIC MODULATING VISCOUS FAN DRIVE
S	119A19	COOLANT PROTECTION	ETHYLENE GLYCOL FULLY FORMULATED COOLANT (50/50 MIX DYED PINK) TO - 34DEG, W/ FILTER
	H9XJ1X	RADIATOR TYPE	RADIATOR, CORE AREA 1386sq in (90sq dm)
S	124AA3	HOSES - RADIATOR/HEATER	MACK EPDM RADIATOR & HEATER HOSES
S	293043	FUEL-WATER SEPARATOR	MACK W/MANUAL DRAIN VALVE W/ HOT RECIRCULATION (INTEGRAL W/ PRIMARY FUEL FILTER)
S	MBXA1X	PRIMARY FUEL FILTER POSITION (CA)	STANDARD FUEL FILTER POSITION
S	MCA00A	ENGINE HEATERS	NO COLD WEATHER STARTING AIDS PROVIDED
S	QHXC1X	OIL SUMP	OIL PAN
S	36AA1X	TETHER DEV PKG, CAPS & COVERS	FURNISH CAP RETAINER FOR OIL FILL & RADIATOR OVERFLOW TANK
S	2YBZ1X	ENGINE STOP, EMERGENCY (CA in PC29 only)	WITHOUT ENGINE STOP, EMERGENCY

CLUTCH/TRANS EQUIPMENT			DESCRIPTION
	492032	GEAR SHIFTER	EATON/FULLER SHIFTER
	133AD1	CLUTCH	EATON ADVANTAGE EZ-PEDAL 9-SPRING,2PLATE 15.5" CERAMIC 6 PADDLES, MANUAL ADJUST
	MCB04B	CLUTCH ACTUATION SYSTEM & PEDAL PAD	MECHANICAL CLUTCH CABLE SYSTEM WITH RUBBER PEDAL
	1950J5	DRIVELINE - MAIN	SPICER SPL250HDXL LITE - LARGE (PROPS-L)
	204044	DRIVELINE - INTERAXLE	SPICER SPL170XL "LITE SERIES"
S	76AA1X	PROPELLR SHAFT MAIN, UNVSL JNT	UNIVERSAL JOINT HALF-ROUND TYPE
S	8WAAAX	PROP SHAFT INTERAXL UNIV JOINT	HALF-ROUND UNIVERSAL JOINT
S	4LDA1X	TRANSMISSION OUTPUT TORQUE	TRANSMISSION OUTPUT TORQUE BASIC
S	RCXB1X	BELL HOUSING	ALUMINUM
S	7RXB1X	LUBRICANTS, TRANSMISSION	SYNTHETIC OIL IN TRANSMISSION
	139AA2	TRANSMISSION OIL COOLER	TRANS OIL COOLER (INTEGRAL OIL PUMP)

FRONT AXLE EQUIPMENT			DESCRIPTION
S	240AA6	FRONT AXLE	12000# (5400 KG) MACK FXL12 STRAIGHT SPINDLE/UNITIZED BEARINGS
S	244AB2	SPRINGS - FRONT	MACK TAPERLEAF HD 12000# (5400 KG) GROUND LOAD RATING, EQUAL BIAS
S	YNX99X	FRONT STABILIZER	WITHOUT FRONT STABILIZER
	241011	FRONT AXLE BRAKES	BENDIX NEXT GENERATION DRUM BRAKE, HEAVY DUTY 16.5 X 5 (9.65mm thick)
S	U3XA1X	BRAKE, FRONT	CAST IRON
S	U0AA1X	FRONT BRAKE ADJ. MANUFACTURE	HALDEX - AUTOMATIC
S	V7AB1X	FRONT BRAKE CHAMBER MFG.	FRONT BRAKE CHAMBER MANUFACTURER, HALDEX
S	0KXB1X	HUB MATERIAL, FRONT	ALUMINUM
S	245AA2	STEERING	TRW TAS-65 INTEGRAL POWER
S	IRXC1X	FRONT SUSP MAINTENANCE	MAINTENANCE FREE, RUBBER SPRING EYE BUSHINGS
S	7VXC1X	LUBRICANTS, FRONT AXLE	PETROLEUM/SYNTHETIC (50/50) OIL FRONT AXLE

TECHNICAL SPECIFICATION *(cont.)*



REAR AXLE EQUIPMENT			DESCRIPTION
S	268AC9	REAR AXLE	40000# (18100kg) MERITOR MT40-14X4C AMBOID (HIGH ENTRY)
S	6MAA1X	REAR AXLE CASING WIDTH	W/O WIDE TRACK AXLE
S	018AA1	CARRIER - REAR AXLE	VENDOR CARRIER
	TAXE5X	REAR AXLE RATIO	3.55 RATIO
S	186AC0	REAR SUSPENSION	MAXLITE 40 EZ (GEN 2) 40,000 lb
S	GWXBYX	BOGIE SPREAD, REAR	52" AXLE SPACING (BOGIE WHEELBASE)
S	ZAXA1X	SUSPENSION LEVELLING DEVICE (CA in PC29 only)	ELECTRICAL REGULATION LEVELING DEVICE
S	J6DB1X	AIR SUSPENSION DUMP WARNING	AIR SUSPENSION DUMP, SPEED LIMITED, WARNING INDICATOR & BUZZER
S	YVXA1X	REAR SHOCK ABSORBER	REAR SHOCK ABSORBER
S	XYXA1X	TRANSVERSE TORQUE RODS, R SUSP	TRANSVERSE TORQUE ROD - ALL AXLES
S	237037	AUX.SPRING BRAKE QTY	AUX SPRING BRAKE QTY, 4 CHAMBERS
	253073	BRAKES - REAR	BENDIX NEXT GENERATION DRUM BRAKE, LIGHT WEIGHT 16.5 X 7 (5.59mm thick) (Total for QTY = 2)
S	U4XA1X	BRAKE, DRIVE, REAR	CAST IRON
S	U1AA1X	REAR BRAKE ADJ MANUFACTURE	HALDEX - AUTOMATIC (Total for QTY = 2)
	V1AB1X	REAR BRAKE CHAMBER SIZE	REAR SPRING BRAKE CHAMBERS 30/30 TYPE
	N5FAFX	BRAKE ORI REAR-MOST DRIVE AXLE	DRUM BRAKE CHAMBER ORIENTATION: Middle Mount - Forward of Axle - Chamber Up
S	300AS0	PARKING BRAKE CHAMBER	HALDEX "GOLD SEAL PLUS" (3" STROKE) BRAKE CHAMBERS (Total for QTY = 2)
	0LXI5X	HUB MATERIAL, DRIVE	IRON PRESET REAR HUB W/INTEGRATED SPINDLE NUT
S	3LAC1X	POWER DIVIDER LOCKOUT	POWER DIVIDER LOCKOUT, W/BUZZER & LIGHT
S	7WXA1X	LUBRICANTS, REAR AXLE(s)	FACTORY OPTION LUBE - REAR AXLE 80W-90
	698058	ANTILOCK BRAKE SYSTEM	BENDIX WITHOUT TRACTION CONTROL 4S4M
S	URXD1X	BRAKE VALVE VERSION	BENDIX SWITCHES AND VALVES WHERE POSSIBLE

FRAME EQUIPMENT/FUEL TANKS			DESCRIPTION
	271180	WHEELBASE	180"
S	374056	AF (OVERHANG)	56"
S	MCE01E	FRAME RAILS & LINERS	6 x 90 x 266mm - (0.24" x 3.54" x 10.47"); RBM 1,390,000 LB-IN
S	281AA2	CROSSMEMBERS	STEEL
S	Q5AA1X	REAR CROSSMEMBER OPTIONS	STEEL CLOSING REAR CROSSMEMBER
S	X6XA1X	REAR FRAME TREATMENT	WITHOUT TAPERED FRAME RAIL ENDS
S	4DXEDX	FRONT BUMPER	AERODYNAMIC, PAINTED, WITH BLACK ACCENT
S	2RAA1X	FUEL LEVEL SENDER UNIT, LIQUID	BASIC FUEL LEVEL SENDER MOUNTED ON L.H TANK
	288AB2	FUEL TANK - LH	53 GALLON (200 L) 22" ALUMINUM ROUND
S	290AA1	FUEL TANK - RH	W/O RH FUEL TANK
S	JHXA1X	FUEL HOSES, LIQUID	NYLON TUBE
S	8520C2	FUEL FILLER NECK OPTIONS	WITHOUT FILLER NECK SCREEN, WITH NON-LOCKABLE FUEL TANK CAP
	12AA1X	FUEL LINE OPTIONS, LIQUID	W/O FUEL LINE OPTION
S	Q2AA1X	CAB INSTEP VERSION	STANDARD 2 STEP CAB ACCESS
S	14AA1X	FAST FILL FUEL SYSTEM	W/O FAST FILL FUEL SYSTEM OPTION

AIR/BRAKE			DESCRIPTION
S	UWXD1X	AIRTANK DRAIN VALVE	MANUAL DRAIN VALVES, WITH LANYARD ON SUPPLY TANK ONLY
S	U2XB1X	AIRTANK MATERIAL	STEEL AIR TANK PAINTED CHASSIS COLOR
S	141AA1	RELOCATE AIR RESERVOIRS	W/O RELOCATED AIR TANKS
S	1JAAAX	PARKING BRAKE VALVE	SINGLE VALVE SYSTEM

TECHNICAL SPECIFICATION *(cont.)*



ELECTRICAL		DESCRIPTION	
S	3120C2	ROOF & SIDE MARKER LIGHTS	(5) TRUCKLITE CHROME BULLET ROOF MARKER & TRUCKLITE SIDE MARKER LAMPS
S	LJXB1X	HEADLAMP BULB TYPE	HEADLAMP BULB TYPE, LED
S	LSXJ7X	DAYTIME RUNNING LIGHTS	W/OVERRIDE SWITCH, PARK BRAKE & ENGINE RUNNING ACTIVATED
S	X2AA1X	DRL OVERRIDE SPEED THRESHOLD	DRL OVERRIDE SPEED THRESHOLD 8 KMPH (5 MPH)
	NEXC1X	TAIL LAMPS	INCANDESCENT TAIL LAMPS

PTO		DESCRIPTION	
S	2WAZ1X	PTO TRANS NEUTRAL CONTRL CHECK	W/O NEUTRAL CONTROL

SPECIALTY EQUIPMENT		DESCRIPTION	
S	MCQ01Q	LANE SUPPORT SYSTEM (LSS)	WITHOUT LANE SUPPORT SYSTEM
S	2PEZ1X	DATA CAPTURE	WITHOUT DATA CAPTURE
S	1PAZ1X	CAMERA, SURVEILLANCE	WITHOUT CAMERA

CAB INTERIOR (A THRU G)		DESCRIPTION	
S	198048	GAUGES - UNIT OF MEASURE	U.S. UNITS (PREDOMINANT)
	E1AAAX	GAUGE OIL TEMP-REAR AXLE	REAR AXLE OIL TEMP GAUGE IN DID (DRIVER INFORMATION DISPLAY)
S	173AA5	AIR CONDITIONING/HEATER	BLEND AIR HVAC W/"ATC" TEMP REGULATION
S	EEXA1X	CUPHOLDER	CUPHOLDER
S	I0XAHX	DOME LAMP, INTERIOR	(4) DOME LAMPS - DOOR AND SWITCH ACTIVATED
S	184AA2	FLOOR COVERING	POLYURETHANE FLOOR MAT WITHOUT REMOVABLE INSERTS

CAB INTERIOR (H THRU R)		DESCRIPTION	
S	C52082	INSTMTN CLUSTER LANGUAGE	DEFAULT: ENGLISH, SPANISH, FRENCH
S	20XA1X	KEY TYPES FOR DOORS	ALL CHASSIS KEYED AT RANDOM
S	13AA1X	DOOR OPENING OPTIONS	W/O ELECTRONIC KEYLESS ENTRY
S	E3XC1X	FORWARD OVERHEAD STORAGE	COMPARTMENT W/NET
S	1WAB1X	POWER LEADS	POWER LEADS (5-WAY BINDING POSTS FOR CB RADIO) IN HEADER CONSOLE
	5CXAEX	AUDIO SPEAKER LOCATION	SPEAKER LOCATION, BEHIND DOORS, MIDDLE HIGH SIDE PANEL
S	5JXALX	COM.RADIO PREP KIT (CB)	MOUNTING PLATE AND VELCRO STRAP IN HEADER CONSOLE
S	21XA1X	AUXILIARY REAR WINDOW	REAR WINDOW (FIXED TYPE)
S	IFXB1X	REAR WALL STORAGE COMPARTMENT	STORAGE POUCH REAR

CAB INTERIOR (S THRU Z)		DESCRIPTION	
S	004014	INTERIOR TRIM LEVELS	STANDARD PACKAGE, STEEL GRAY (Package 11A)
S	196AAA	SEAT - DRIVER'S	MACK-AIR, HIGH BACK, 1 CHAMBER AIR LUMBAR
S	MAPB2X	SEAT COVERING - DRIVER'S	DRIVER'S SEAT - STEEL GREY VINYL
	592082	SEAT BELT(S)	LAP & SHOULDER (DRIVER'S SEAT ONLY)
S	D8XC1X	SEAT BELT REMINDER	SEAT BELT REMINDER IN INSTRUMENT, WITH AUDIO
S	2QAA1X	IGNITION TYPE	KEY TYPE
S	161005	STEERING WHEEL	2 SPOKE URETHANE GRIP, GUNMETAL SPOKES, W/O SWITCHES
S	WSXBAX	WINDSHIELD TYPE	TWO PIECE WINDSHIELD
S	145AA1	CAB GLASS	TINTED WINDSHIELD & SIDE WINDOWS & REAR WINDOW (IF EQUIPPED)
S	148AA3	WINDSHIELD WIPERS	2 SPEED ELECTRIC MOTOR W/INTERMITTENT FEATURE

TECHNICAL SPECIFICATION *(cont.)*



CAB - SLEEPER BOX			DESCRIPTION
S	4ZXZ1X	REFRIGERATOR	W/O SLEEPER BOX REFRIGERATOR

CAB EXTERIOR			DESCRIPTION
S	88AA1X	EMBLEMS OPTION	W/O MISC ORNAMENT CHANGE OPTION
S	MCG08G	EXTERIOR TRIM FINISH AND PACKAGES	ANTHEM BOLD BLACK EXTERIOR TRIM PACKAGE
S	MCD03D	PASSENGER SIDE VISIBILITY OPTIONS	AUXILIARY WINDOW IN RH DOOR
S	5870G7	GRAB HANDLES	PREMIUM BLACK EXTERIOR CAB GRAB HANDLE, BLACK GRAB HANDLE RH INTERIOR WINDSHIELD POST
S	154AA6	HORN - AIR	(1) BLACK TWIN TRUMPET, UNDER CAB MOUNTED
S	LXXC1X	HORN - ELECTRICAL	SINGLE TONE
	1520A2	MIRRORS - EXTERIOR	AERO MIRROR - BLACK, WIDE ANGLE both sides, W/O LAMPS

AERODYNAMIC DEVICES			DESCRIPTION
S	159AA1	CAB AERODYNAMIC PACKAGES	WITHOUT CAB AERODYNAMIC DEVICES
S	MCM998	FRONT CHASSIS AERODYNAMIC PACKAGE	WITHOUT FRONT AERODYNAMIC FAIRINGS

WHEELS & TIRES			DESCRIPTION
S	900AS0	TIRES BRAND/TYPE - FRONT	11R22.5 G BRIDGESTONE R268 ECOPIA (12350 lbs) (Total for QTY = 2)
S	5312D1	WHEELS - FRONT	22.5x8.25 ACCURIDE ACCU-LITE WHITE POWDER COAT STEEL, 6.60" OFFSET, 5 HAND HOLE (Total for QTY = 2)
S	901601	TIRES BRAND/TYPE - REAR	11R22.5 G BRIDGESTONE M713 ECOPIA (23360 lbs) (DRIVE ONLY) (Total for QTY = 8)
S	3462J6	WHEELS - REAR	22.5x8.25 ACCURIDE ACCU-LITE WHITE POWDER COAT STEEL, 6.60" OFFSET, 5 HAND HOLE (Total for QTY = 8)
S	H1EB1X	DRIVE WHEEL STUDS	DRIVE WHEEL STUDS LONGER LENGTH
S	15XABX	TIRE INFLATION VALVE	STANDARD VALVE STEMS AND CAPS
S	MCH03H	FRONT HUB/WHEEL TRIM	WITHOUT FRONT HUB/WHEEL TRIM
S	MCI03I	REAR HUB/WHEEL TRIM	WITHOUT REAR HUB/WHEEL TRIM (Total for QTY = 2)
S	80AA1X	WHEEL NUT & FINISH, FRONT	WHEEL NUT BASIC FINISH, FRONT
S	3PBA1X	WHEEL NUT FINISH, REAR (CA)	WHEEL NUT BASIC FINISH, REAR

COMMUNICATION SYSTEMS			DESCRIPTION
S	3YAA1X	CO-PILOT - DISPLAY FEATURES ACCESS LEVEL	CO-PILOT DISPLAY, DRIVER ACCESS LEVEL 1
S	M30060	TELEMATIC GATEWAY	TELEMATICS GATEWAY (P2), 4G/LTE AND WLAN SYSTEM WITH DIAGNOSTIC SERVICES

ENGINE ELECTRONICS			DESCRIPTION
S	WOXA1X	OIL PRESSURE, ENGINE SHUTDOWN	OIL PRESSURE, ENGINE SHUTDOWN
S	WMXA1X	COOLANT TEMP, ENGINE SHUTDOWN	COOLANT TEMP, ENGINE SHUTDOWN
S	K5XA2X	ENGINE PROTECTION SYSTEM	ENGINE PROTECTION (SHUTDOWN)
	C7AABX	ENG FAN CNTL, A/C ON, TIME SET	ENG FAN CONTROL, A/C ON, TIME SETTING, 60 SEC
S	K7XY1X	ENGINE IDLE CONTROL	IDLE CONTROL, 600 RPM
S	X0AB0X	SMART IDLE ELEVATED IDLE RPM TIME	INCREASE 10 MINUTE MAXIMUM TIME
S	M3CA1X	IDLE S/D ABS TAMPER CHECK	IDLE SHUTDOWN ABS TAMPER CHECK, ENABLED
S	A8AALX	IDLE S/D IF WARM-UP TEMP	38C DEG (100F), WARM UP TEMP DELAY
S	A4AAEX	IDLE S/D WARM-UP TIMER	5 MIN. WARM UP TIME DELAY
S	B0AAAX	IDLE SHUTDOWN IF POWER > LIMIT	ENG IDLE SHUTDOWN TIME OVERRIDDEN IF TORQUE > THAN LIMIT
S	M4CB1X	IDLE S/D OVERRIDE %ENGINE LOAD	IDLE SHUTDOWN OVERRIDE UPTO 20% ENGINE LOAD THRESHOLD

TECHNICAL SPECIFICATION *(cont.)*



ENGINE ELECTRONICS			DESCRIPTION
S	D2AAFX	AMBIENT TEMP MIN TRESHOLD	AMBIENT TEMP MIN TRESHOLD, 16 DEG C, (60 DEG F)
S	D3AAEX	AMBIENT TEMP MAX TRESHOLD	AMBIENT TEMP MAX TRESHOLD, 27 DEG C, (80 DEG F)
S	B3ABAX	EL HD THROTTLE,MAX ROAD SPEED	ELECTRONIC HAND THROTTLE, MAX ROAD SPEED, 16 KMH (10 MPH)
S	B6ABAX	EL HAND THROTTLE,MAX ENG SPEED	ELECTRONIC HAND THROTTLE, MAX ENGINE SPEED, 1000 RPM
S	B4ADAX	EL HAND THROTTLE,MIN ENG SPEED	ELECTRONIC HAND THROTTLE, MIN ENGINE SPEED, 700 RPM

TRANSMISSION ELECTRONICS			DESCRIPTION
S	M08038	ECONO ROLL	ECONO ROLL DISABLE mDRIVE (REQUIRED FOR ALL OTHER TRANSMISSIONS)
S	779001	TRANSMISSION ELECTRONICS PACKAGE	W/O ELEC TRANS PACKAGE OPTION (all non-Allison transmissions)
S	MAV01V	TRANSMISSION ELECTRONIC SHIFTING PROPERTIES	W/O ALLISON FUELSense 2.0 PROGRAMMING

VEHICLE ELECTRONICS			DESCRIPTION
S	JCX6X	ROAD SPEED LIMITER SETTING	105 KM/H ROAD SPEED LIMITER(65 MPH)
S	Y3CC1X	PEDAL RSL SETTING	101 KM/H PEDAL ROAD SPEED LIMITER (63MPH)
S	JDXA1X	CRUISE CONTROL	CRUISE CONTROL
S	JFXLLX	CRUISE CONTROL, MAX SPEED	MAX CRUISE, 105 KPH (65 MPH)
S	E3AACX	CRUISE CONTROL MIN SPEED	MIN CRUISE, 32 KPH (20 MPH)
S	E4AAAX	CRUISE RESUME WITH CLUTCH	CRUISE RESUME WITH CLUTCH
S	X2BB1X	ROAD SPEED LIMIT CONTROL TYPE	RSL CONTROL TYPE NORMAL
S	L2CA1X	PDLO ENGAGED VLS	POWER DIVIDER LOCK OUT (PDLO) ROAD SPEED LIMIT 8KMH (5MPH)
S	W5BA1X	MAXIMUM ENG SPEED AT 0 MPH	1000 MAXIMUM ENGINE SPEED AT 0 MPH
S	A4BAAX	DETECTION SPEED SENSR TMRNG	DETECTION OF SPEED SENSOR TAMPERING, ENABLE
S	8RXAEX	ENG TORQUE LIMIT,SPEED SENSOR	ENG TORQUE LIMITED TO 50%, IF SPEED SENSOR TAMPER DETECTED
S	X3CB1X	DRIVER ID FUNCTION	DRIVER ID FUNCTION, DISABLED
S	0PAZ1X	DR PERFORMANCE PARAMETERS	WITHOUT DRIVER PERFORMANCE PARAMETERS
S	G5AAHX	ENGINE OVERSPEED,ALL COND, LOG	ENGINE OVERSPEED, ALL CONDITIONS, TIME LOG IF ABOVE 2200 RPM
S	G2AAGX	ENGINE OVERSPEED,FUELED, LOG	ENGINE OVERSPEED, FUELED, TIME LOG IF ABOVE 2100 RPM
S	G4AAUX	VEHICLE OVERSPEED,ALL COND,LOG	VEHICLE OVERSPEED,ALL COND, TIME LOG IF ABOVE 75MPH (121KMH)
S	G3AAPX	VEHICLE OVERSPEED, FUELED, LOG	VEHICLE OVERSPEED, FUELED, TIME LOG IF ABOVE 70MPH (113KMH)
S	G1AABX	ENGINE IDLE DELAY TO LOG	ENGINE IDLE DELAY TO START LOG, 2 MIN
S	W9A01X	PERIODIC TRIP LOG DAY OF MONTH	PERIODIC TRIP LOG, DAY 1 OF THE MONTH

PAINT			DESCRIPTION
S	950AC0	PAINT DESIGN	SINGLE COLOR
S	924014	PAINT TYPE	SOLID PAINT
S	944AA7	PAINT COLOR - FIRST COLOR	MACK WHITE; P9188
S	945998	PAINT COLOR - SECOND COLOR	NO SECOND TRUCK COLOR PROVIDED; NO COLOR
S	946998	PAINT COLOR - THIRD COLOR	NO THIRD TRUCK COLOR PROVIDED; NO COLOR
S	996AA3	PAINT - CAB PAINT SYSTEM	PAINT - CAB, URETHANE CLEAR COAT
S	MPB944	CAB COLOR	SAME AS FIRST COLOR - CAB
S	MPD944	HOOD COLOR	SAME AS FIRST COLOR - HOOD
S	MPA998	ROOF FAIRING COLOR	WITHOUT ROOF FAIRING
S	951AA6	CHASSIS RUNNING GEAR	MACK BLACK (URETHANE); P3036
S	958944	BUMPER	SAME AS FIRST COLOR - BUMPER

TECHNICAL SPECIFICATION *(cont.)*




PAINT		DESCRIPTION	
S	959019	FUEL TANK - ***NO INVENTED VARIANTS ALLOWED in the FUEL TANK PAINT FAMILY***	W/O OPTIONAL FUEL TANK PAINT
S	962032	HUBS & DRUMS-FRONT	SAME AS CHASSIS RUNNING GEAR
S	963033	HUBS & DRUMS-REAR	SAME AS CHASSIS RUNNING GEAR

CALCULATED CODES - KAX		DESCRIPTION	
S	9JXA1X	PROPCALC SELECTION	YES, THE ORDER MUST BE CALCULATED
	D5EA1X	AUTO ROUTING & CLIPPING, CENTER	AUTOMATIC ROUTING & CLIPPING PLACEMENT, CENTER SECTION

BASE WARRANTY & PURCHASED COVERAGES		DESCRIPTION	
S	898002	VEHICLE WARRANTY TYPE	NORMAL DUTY WARRANTY CLASSIFICATION
S	M50020	BASIC CHASSIS COVERAGE	NORMAL DUTY STANDARD BASE COVERAGE 12 MONTHS/100,000 MILES (161,000KM)
	M8301T	EMISSION - SURCHARGE	EPA (only) for Mack MP7 / MP8 Diesel
S	M51021	ENGINE WARRANTY	MACK MP7/MP8 BASE ENGINE COVERAGE 24 MONTHS / 250,000 MILES (402,000KM)
S	M52022	EMISSION COMPONENT COVERAGE	US and CANADA EQUIPPED VEHICLE EMISSION COMPONENTS COVERAGE 60 MONTHS/100,000 MILES (161,000 KM)
	M54094	TRANSMISSION WARRANTY	36/350K MI: EATON TRANSMISSION STANDARD NORMAL AND HEAVY DUTY COVERAGE
S	M55055	CARRIER & AXLE HOUSING WARRANTY	STANDARD VENDOR NORMAL / HEAVY DUTY COVERAGE 36 MONTHS/350,000 (563,00 KM)
S	M56026	AIR CONDITIONING WARRANTY	AIR CONDITIONING STANDARD COVERAGE (Sealed System Only) 12 MONTHS UNLIMITED MILEAGE
S	M57027	CHASSIS TOWING WARRANTY	STANDARD NORMAL / HEAVY DUTY CHASSIS TOWING 90 DAYS OR 5,000 MILES
S	M58028	ENGINE TOWING WARRANTY	STANDARD MACK ENGINE TOWING COVERAGE 24 MONTHS/250,000 MILES (402,000 KM)
S	M690F9	GUARDDOG CONNECT BUNDLE	24 MONTH - GUARDDOG CONNECT WITH MACK OTA (with ASIST and Mack OneCall))
S	M78010	PREPAID API	WITHOUT PREPAID API
S	M67017	PREMIUM MAINTENANCE - CHASSIS LUBE AND INSPECTION	W/O PREMIUM MAINTENANCE - CHASSIS LUBE AND INSPECTION COVERAGE

VEHICLE SPECIFICATION/CALCULATED PERFORMANCE SUMMARY				
Description	Sales Code	Dwg Ref	Length	UOM
Front Frame Extension	N/A	FE	0.0	INCHES
Bumper to Front Axle	N/A	BA	52.4	INCHES
Wheelbase	N/A	WB	179.5	INCHES
Rear Overhang	N/A	OH	56.5	INCHES
Overall Length	N/A	OL	288.5	INCHES
Bumper to Back of Cab	N/A	BBC	117.9	INCHES
Eff. Bumper to Back of Cab	N/A	EBBC	117.9	INCHES
Eff. Cab to Rear Axle	N/A	ECA	114.1	INCHES
Eff. Front Axle to Back of Cab	N/A	EAC	65.5	INCHES
Eff. Cab to End of Frame	N/A	ECEF	170.6	INCHES
Unladen 5th Wheel Height	E5BZ1X	5W	0.0	INCHES
Unladen Frame Height	N/A	FH	40.0	INCHES
Cab Height	N/A	CH	73.0	INCHES
Overall Height	N/A	OVH	113.0	INCHES
Driver CG	N/A	DCG	51.2	INCHES
52" AXLE SPACING (BOGIE WHEELBASE)	GWXBYX	BS	52.0	INCHES
Second Front Axle Spacing	RHXZ1X	SFAS	0.0	INCHES

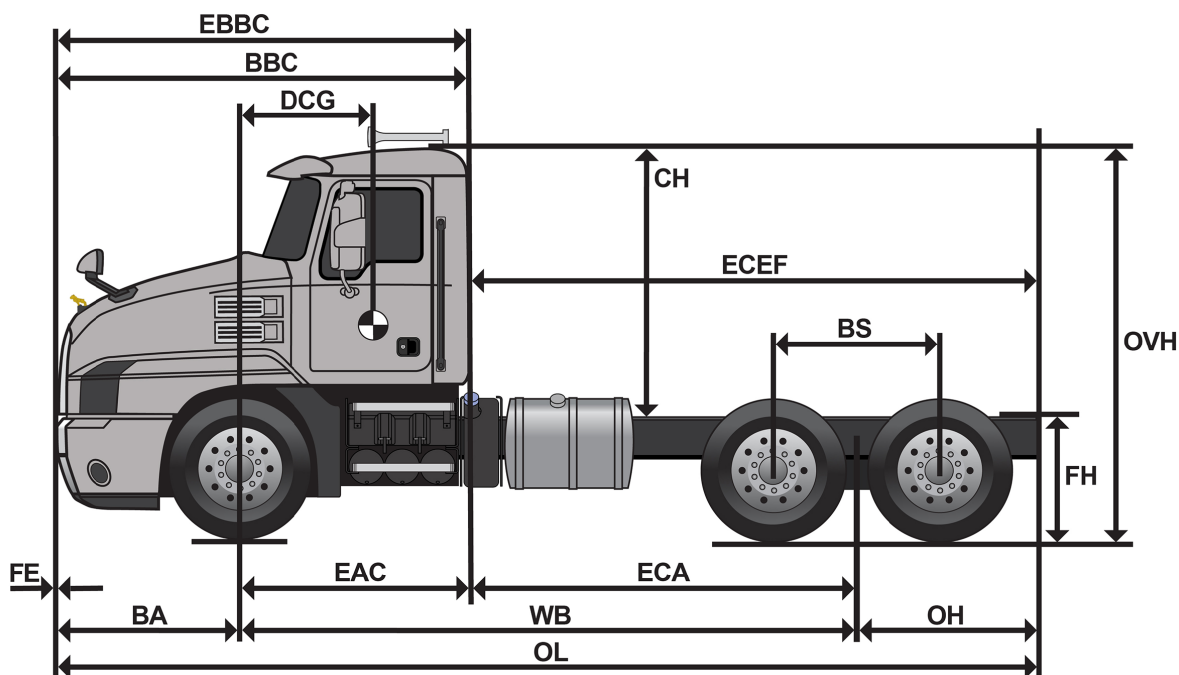

VEHICLE SPECIFICATION/CALCULATED PERFORMANCE SUMMARY				
Description	Sales Code	Dwg Ref	Left Value(in)	Right Value(in)
Wheelbase	N/A	WB	179.5	179.5
Available Rail Space Right	N/A	ARSR	N/A	57.7
Available Rail Space Left	N/A	ARSL	30.6	N/A
Eff. Front Axle to Back of Cab	N/A	REF	65.5	65.5
Front Axle To Fender	CDX25X	N/A	27.0	27.0
Cleartech One Unit	DPF04F	N/A	0.0	48.0
Battery Box	393AC3	N/A	24.0	0.0
53 GALLON (200 L) 22" ALUMINUM ROUND / W/O RH FUEL TANK	288AB2 / 290AA1	N/A	35.0	0.0
Ad-Blue Tank	DF10M1	N/A	16.0	0.0
Drive Tire Radius	901601	N/A	20.9	20.9

Top View image is intended for illustration purposes only and is not presented to scale. Wheelbase, Axle Spacing and After frame are not shown as specified, but are a representation. Customer Adaptation (CA) options and relocated components are not represented in these images. Most CA options impact the variation of the image, thus an image may not populate. Calculations are approximate to a tolerance of ± 4 inches due to component mounting variation. Certain chassis component options are NOT represented in the Top View image, such as, but not exclusive to, Front Frame Extensions, Fuel Water Separators, Air Dryers, PTOs, Fifth Wheels, Chassis Fairings, Toolboxes, Trailer Connections. For further information on these items and their respective locations on your specification, please refer to the data sheets associated with those items in the configurator.

VEHICLE SPECIFICATION/CALCULATED PERFORMANCE SUMMARY					
			Rear		
Description	Sales Code	Dwg Ref	Unladen	Laden	UOM
Requested Fifth Wheel Height	E5BZ1X		0.0	0.0	INCHES
Tire Radius	901601	A	20.9	19.4	INCHES
Suspension Height	186AC0	B	8.7	8.3	INCHES
Frame Depth	YBXFAX	C	10.5	10.5	INCHES
Closest Available Fifth Wheel Leg Height	N/A	D	0.0	0.0	INCHES
Total Height	N/A	E	40.0	38.1	INCHES





VEHICLE SPECIFICATION/CALCULATED PERFORMANCE SUMMARY				
Sub-Category	Sales Code	Sales Code Description	Value	UOM
Front Axle	240AA6	12000# (5400 KG) MACK FXL12 STRAIGHT SPINDLE/UNITIZED BEARINGS	12000	LB
Front Suspension	244AB2	MACK TAPERLEAF HD 12000# (5400 KG) GROUND LOAD RATING, EQUAL BIAS	12001	LB
Front Tires	900AS0	11R22.5 G BRIDGESTONE R268 ECOPIA (12350 lbs)	12351	LB
Front Wheels	5312D1	22.5x8.25 ACCURIDE ACCU-LITE WHITE POWDER COAT STEEL, 6.60" OFFSET, 5 HAND HOLE	14800	LB
Front GAWR			12000	LB
Rear Axle	268AC9	40000# (18100kg) MERITOR MT40-14X4C AMBOID (HIGH ENTRY)	40001	LB
Rear Suspension	186AC0	MAXLITE 40 EZ (GEN 2) 40,000 lb	40000	LB
Rear Tires	901601	11R22.5 G BRIDGESTONE M713 ECOPIA (23360 lbs) (DRIVE ONLY)	46721	LB
Rear Wheels	3462J6	22.5x8.25 ACCURIDE ACCU-LITE WHITE POWDER COAT STEEL, 6.60" OFFSET, 5 HAND HOLE	59199	LB
Rear GAWR			40000	LB
Truck GVWR			52000	LB
Gross Combination Weight Rating			0	LB
Tax Value GVWR (USA FET Only)			52000	LB



Mack Trucks
www.macktrucks.com