

**JB80-2**  
**JB160-2**  
**Part No.: 39615250-JB120-2**  
**JB200-2**

**Capacity 17,600 / 26,400 / 35,200 / 44,000 lbs**



### Air hydraulic twin ram jacking beam

- Both lifting rams have ability to be operated individually or in tandem for safe operation
- Equipped with independent mechanical locking system, locking pawl engaged by gravity
- Transversely sliding rams
- Rapid and precise air hydraulic unit with high speed ram travel
- Simple modern design with control panel at ergonomical working height
- Can be made to fit all lifts due to its adjustable frame (23 1/4" - 35" or 33 1/2" - 45 1/4")
- Hold to run controls for ultimate safety
- Hydraulically protected against overloading
- Supplied with 2 x 4" extensions  
+ 2 x flat adapters

## Options



### Diff. beam

For lifting with both rams  
at one point.

## Crossbeam adapters



### Extensions


4 inch, 8 inch



### Adapters

U-shape

V-shape

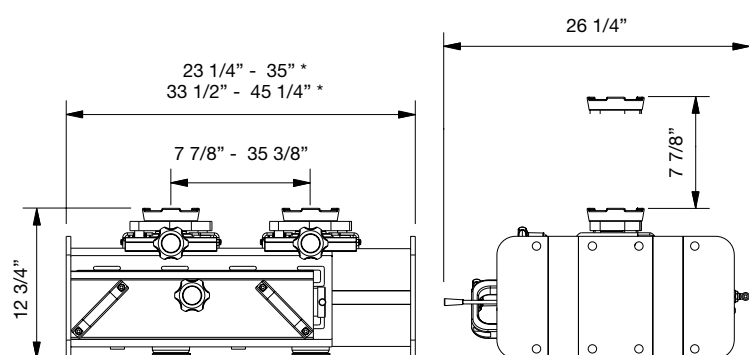

\* dimensions excluding support arms

Part No.: 39615250

|                           | JB80-2            | JB120-2           | JB160-2           | JB200-2           |
|---------------------------|-------------------|-------------------|-------------------|-------------------|
| Capacity                  | 17,600 lbs        | 26,400 lbs        | 35,200 lbs        | 44,000 lbs        |
| Stroke                    | 7 7/8"            | 7 7/8"            | 7 7/8"            | 7 7/8"            |
| Min. height               | 12 3/4"           | 12 3/4"           | 12 3/4"           | 12 3/4"           |
| Max. height               | 20 5/8"           | 20 5/8"           | 20 5/8"           | 20 5/8"           |
| Width range small frame   | 23 1/4" - 35"     | 23 1/4" - 35"     | 23 1/4" - 35"     | 23 1/4" - 35"     |
| Width range wide frame    | 33 1/2" - 45 1/4" | 33 1/2" - 45 1/4" | 33 1/2" - 45 1/4" | 33 1/2" - 45 1/4" |
| Depth                     | 26 1/4"           | 26 1/4"           | 26 1/4"           | 26 1/4"           |
| Lifting points (distance) | 7 7/8" - 35 3/8"  | 7 7/8" - 35 3/8"  | 7 7/8" - 35 3/8"  | 7 7/8" - 35 3/8"  |
| Air supply                | 116 - 174 PSI     | 116 - 174 PSI     | 116 - 174 PSI     | 116 - 174 PSI     |
| Air consumption           | 92.5 gpm          | 92.5 gpm          | 92.5 gpm          | 92.5 gpm          |
| Weight                    | 446 lbs           | 446 lbs           | 446 lbs           | 446 lbs           |

\* The capacity of the jacking beam cannot exceed 0.66 x the lift capacity

**sterdil KONI**

 a member of the Stertil Group

Stertil-Koni U.S.A. Inc.  
200 Log Canoe Circle  
Stevensville, Maryland 21666  
Tel. 410-643-9001  
Toll free 800-336-6637  
Fax 410-643-8901  
lifts@sterdil-koni.com



www.stertil-koni.com

 StertilKoniUSA

 @StertilKoniUSA