2023 Isuzu FTR Diesel, 26,950 GVWR





Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FTR Diesel, 26,950 GVWR (2023 FTR, MT1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

	Code	Description	Weigh
Model			
	MT1	FTR 152"WB, 127"CA	
	G1	White, standard model specifications with power	
		windows, power door locks, air conditioning, 5.57	
		final ratio, 11R22.5G tires, 21,000 multi leaf	
		suspension, steel wheel type, and 50 gallon aluminum fuel tank	
Options		diaminani ladi talik	
-	011	5.571:1	0.0 lbs
	34K	12,000 lbs. capacity	0.0 lbs
	34L	21,000 lbs. capacity	0.0 lbs
	39W	152" Wheelbase 127"CA	0.0 lbs
	40C	Dana E1254-W 12,000 lbs. capacity	0.0 lbs
	5S8	11R22.5 G	0.0 lbs
	70A	Left hand rail	0.0 lbs
	729	Arc white color	0.0 lbs
	7KJ	Straight frame, 80,000 PSI, 33.5 wide	0.0 lbs
	8RP	Radio AM/FM/CD with Bluetooth	0.0 lbs
	A56	Level air suspension seat with RH armrest driver	0.0 lbs
		seat	
	C60	Air conditioner	0.0 lbs
	DJ6	Black mirror head with black stays	0.0 lbs
	E6U	Dry paper single element. (Donaldson)	0.0 lbs
	G1	White, standard model specifications with power	0.0 lbs
		windows, power door locks, air conditioning, 5.57	
		final ratio, 11R22.5G tires, 21,000 multi leaf	
		suspension, steel wheel type, and 50 gallon aluminum fuel tank	
	104	17 CFM turbocharged heavy duty.	0.0 lbs
	IOB	Single module Cummins aftertreatment w/ DPF &	0.0 lbs
	100	SCR, exhaust cooler, and electronic exhuast	0.0 100
		restriction.	
	I5H	LRR (low rolling resistance)	0.0 lbs
	IE8	Cummins B6.7, diesel engine, 408 CID (6.7L), 260	0.0 lbs
		HP at 2400 RPM, 660 lbft. gross torque at 1600	
		RPM, 6-cylinder, turbocharged, inter-cooled, EGR	
		cooler, high pressure common rail fuel system, and single module aftertreatment.	
	ILO	Yes	0.0 lbs
	IQ6	Standard Floor Mats	0.0 lbs
	IX1	Dual 12-Volt maintenance free group 31 750 CCA	0.0 lbs
	1// 1	batteries with threaded posts	0.0 103
	IX2	Rear body dome lamp switch	0.1 lbs
	KW1	160 AMP. with integral regulator.	0.0 lbs
	M20	Dana S19-140 single-speed axle, 19,000 lbs.	0.0 lbs
	_	capacity with synthetic lubricant	
	NG5	50 State Emission	0.0 lbs
	RQ2	Truck Application	0.0 lbs



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FTR Diesel, 26,950 GVWR (2023 FTR, MT1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank


Selected Model and Options			
Code	Description	Weight	
SAS	Multi leaf, bolted	0.0 lbs.	
THF	50 Gallon Fuel Tank Capacity	355.5 lbs.	
Y6E	Allison RDS 2550 / 6 speed trans w/ PTO gear	0.0 lbs.	
Z06	Full air dual circuit, s-cam, drum	0.0 lbs.	



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FTR Diesel, 26,950 GVWR (2023 FTR, MT1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

Weight Distribution

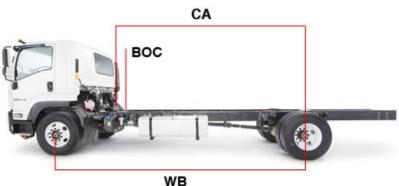

Front Wt.	6,925.37 lbs.	65%
Rear Wt.	3,668.13 lbs.	35%
GVWR	25,950.00 lbs.	
GVW	10,593.50 lbs.	
Remaining Payload Weight	15,356.50 lbs.	

Driver/Passenger Weight	350.0 lbs.
Wheelbase (WB)	152 inches
Cab-to-Axle (CA)	127 inches
Body Length	
Body Weight	
Back of Cab (BOC)	10.4 inches

** You must fill in body length and weight to enable body and payload weight calculations.

Weight (lbs.)	Front	Rear	Total
Chassis	6,448.00	3,440.00	9,888.00
Chassis Equipment	127.37	228.13	355.50
Subtotal	6,575.37	3,668.13	10,243.50
Driver/Passengers	350.00	0.00	350.00
Body/Body Equipment	0.00	0.00	0.00
Payload	0.00	0.00	0.00
Total	6,925.37	3,668.13	10,593.50
GAWR/GVWR	12,000.00	19,000.00	25,950.00
GCWR			30,000.00

Chassis Equipment:

Code	Item	Center of Gravity	Front Axle	Rear Axle	Total
G1	White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank		0.00 lbs.	0.00 lbs.	0.00 lbs.
34L	21,000 lbs. capacity		0.00 lbs.	0.00 lbs.	0.00 lbs.
SAS	Multi leaf, bolted		0.00 lbs.	0.00 lbs.	0.00 lbs.
THF	50 Gallon Fuel Tank Capacity	97.54 inches behind the front axle	127.37 lbs.	228.13 lbs.	355.50 lbs.
5S8	11R22.5 G		0.00 lbs.	0.00 lbs.	0.00 lbs.
011	5.571:1		0.00 lbs.	0.00 lbs.	0.00 lbs.

Driver/Passengers:

	Center of Gravity	Front Axle	Rear Axle	Total
Driver	front axle	350.00 lbs.	0.00 lbs.	350.0 lbs.



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FTR Diesel, 26,950 GVWR (2023 FTR, MT1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

Warranty

2023 MY Only

Warranty Limitations: Time or Mileage, Whichever Comes First

New Truck Warranty	Time in Years	Vehicle Miles
Basic	3	Unlimited
Engine*	3	Unlimited
Transmission**	3	Unlimited
 Drive Axle Driveshaft Front Axle I-Beam Crossmembers Flywheel Housing 	3	Unlimited
Erama Daila	3	Unlimited
Frame Rails	$\mathit{5}^{\dagger}$	Unlimited [†]
Corrosion (Rust Through)	4	Unlimited
Dandaida Ansistanas	3	Unlimited
Roadside Assistance	5 ^{††}	100,000 ^{††}
Emission Warranty	Time in Years	Vehicle Miles
Federal Emission /Control System ^{†††}	5	100,000
CARB Emission /Control System ^{†††}	5	150,000
GHG Emission	5	100,000
Tires	2	24,000

The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. See your authorized Isuzu dealer for warranty details.

Current report content is based on data as of 2022-07-11 12:10:45. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

Initial:

^{*}The Cummins engine is warranted separately by Cummins.

^{**}The Allison Automatic Transmission is warranted separately by Allison Transmission.

[†]After 3 years, coverage is 50% labor and parts for up to 5 years.

^{††}Tows related to emissions issues may be covered for up to 5 years or 100,000 miles (whichever comes first).

^{†††}Emission components are covered by either Isuzu or Cummins; see your Isuzu dealer for details.



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FTR Diesel, 26,950 GVWR (2023 FTR, MT1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

Optional Equipment **Options** Code Description IY4 Delete radio UZF Back up alarm Engine emergency shutdown system HWT, LWL, IH2 IY9 Engine idle shutdown (timer set at 3 minutes for engine shutdown) I9A Engine idle shutdown (timer set at 5 minutes for engine shutdown) PTO enable switch and engine idle up switch IL9 recommended for PTO and idle applications only I4K Keyless entry system including two keypads as standard I1L Speed limited to 58 MPH Speed limited to 65 MPH I2L I4L Speed limited to 70 MPH I3L Speed limited to 68 MPH I7L High visibility seat belt (driver seat only) High visibility seat belt (driver and RH passenger I8L I2Q 96" wide heated mirrors (flat & convex) I3Q 96" wide heated remote mirrors (heated flat & convex, remote flat only) 14Q 102" wide standard mirror heads I5Q 102" wide heated mirrors (flat & convex) 16Q 102" wide heated remote mirrors (heated flat & convex, remote flat only) I8P Fire extinguisher (5 lbs) and triangle kit IF6 Fire extinguisher (2.5 lbs) and triangle kit I₁V Audio System with 7" diagonal color touch screen I₂V Audio System with 7" diagonal color touch-screen with backup camera (camera shipped loose) Seat Covers standard cab IV8 I7V Aluminum wheels: 4 aluminum wheels + 2 steel rear inner wheels I8V Aluminum wheels: 6 aluminum wheels I4V Forward collision and lane departure warning (Mobileye) I3Z Spare keys (2 additional, 4 keys in total) 179 Block heater and oil pan heater with receptacle 172 Block heater with receptacle I2M Delete cruise control switch I6L LED lighting package I6B AGM batteries (825 CCA x 2) **CEW CARB Emissions Warranty I8T** Chrome Grille



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FTR Diesel, 26,950 GVWR (2023 FTR, MT1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank


Turning Circle	
Specification Summary	
Model	MT1G1
Front Axle	
40C	Dana E1254-W 12,000 lbs. capacity
Wheelbase	
39W	152" Wheelbase
Front Wheels	
Front Tires	



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FTR Diesel, 26,950 GVWR (2023 FTR, MT1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

Turning Circle

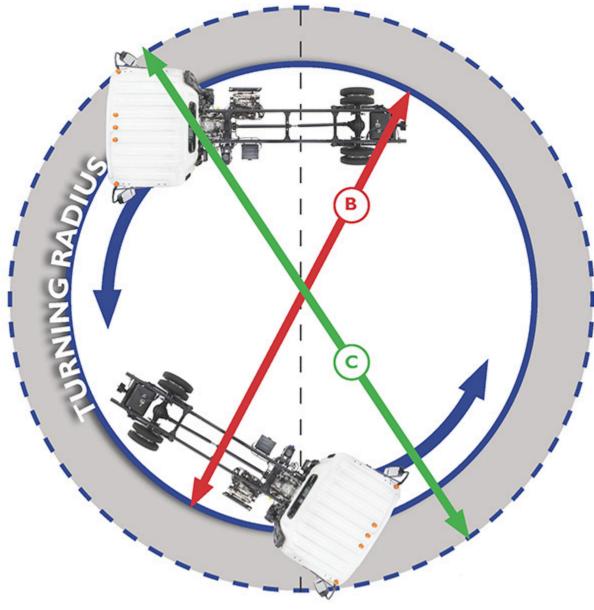

A: Inside Wheel Cut Angle: 50.00°

B: Minimum turning

diameter, Curb to Curb: 43.70'
Curb to Curb diameter is measured from the outside of the front tire.

C: Minimum turning diameter, Wall to Wall: 48.70'
Wall to Wall diameter is measured from the outermost part of the cab.