

# 2023 Isuzu FVR Diesel, De-Rate to 25,950 GVWR



Current report content is based on data as of 2022-07-11 12:15:27. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

2023 Isuzu FVR Diesel, De-Rate to 25,950 GVWR (2023 FVR De-Rate, MW1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

## Selected Model and Options

	Code	Description	Weight
<b>Model</b>			
	MW1	FVR De-Rate 152"WB, 127"CA	
	G1	White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank	
<b>Options</b>			
	011	5.571:1	0.0 lbs.
	34K	12,000 lbs. capacity	0.0 lbs.
	34L	21,000 lbs. capacity	0.0 lbs.
	39W	152" Wheelbase 127"CA	0.0 lbs.
	40C	Dana E1254-W 12,000 lbs. capacity	0.0 lbs.
	5S8	11R22.5 G	0.0 lbs.
	70A	Left hand rail	0.0 lbs.
	729	Arc white color	0.0 lbs.
	7KJ	Straight frame, 80,000 PSI, 33.5 wide	0.0 lbs.
	8RP	Radio AM/FM/CD with Bluetooth	0.0 lbs.
	A56	Level air suspension seat with RH armrest driver seat	0.0 lbs.
	C60	Air conditioner	0.0 lbs.
	DJ6	Black mirror head with black stays	0.0 lbs.
	E6U	Dry paper single element. (Donaldson)	0.0 lbs.
	G1	White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank	0.0 lbs.
	I04	17 CFM turbocharged heavy duty.	0.0 lbs.
	I0B	Single module Cummins aftertreatment w/ DPF & SCR, exhaust cooler, and electronic exhaust restriction.	0.0 lbs.
	I5H	LRR (low rolling resistance)	0.0 lbs.
	IE8	Cummins B6.7, diesel engine, 408 CID (6.7L), 260 HP at 2400 RPM, 660 lb.-ft. gross torque at 1600 RPM, 6-cylinder, turbocharged, inter-cooled, EGR cooler, high pressure common rail fuel system, and single module aftertreatment.	0.0 lbs.
	IL0	Yes	0.0 lbs.
	IQ6	Standard Floor Mats	0.0 lbs.
	IX1	Dual 12-Volt maintenance free group 31 750 CCA batteries with threaded posts	0.0 lbs.
	IX2	Rear body dome lamp switch	0.1 lbs.
	KW1	160 AMP. with integral regulator.	0.0 lbs.
	M21	Dana S21-140 single-speed axle, 21,000 lbs. capacity with synthetic lubricant	0.0 lbs.
	NG5	50 State Emission	0.0 lbs.

Current report content is based on data as of 2022-07-11 12:15:27. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



# LILLEY ISUZU TRUCK

Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FVR Diesel, De-Rate to 25,950 GVWR (2023 FVR De-Rate, MW1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

## Selected Model and Options

Code	Description	Weight
RQ2	Truck Application	0.0 lbs.
SAS	Multi leaf, bolted	0.0 lbs.
THF	50 Gallon Fuel Tank Capacity	355.5 lbs.
Y6T	Allison RDS 2500 / 6 speed trans w/ PTO gear	0.0 lbs.
Z06	Full air dual circuit, s-cam, drum	0.0 lbs.


Current report content is based on data as of 2022-07-11 12:15:27. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

# LILLEY ISUZU TRUCK

Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FVR Diesel, De-Rate to 25,950 GVWR (2023 FVR De-Rate, MW1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

## Weight Distribution

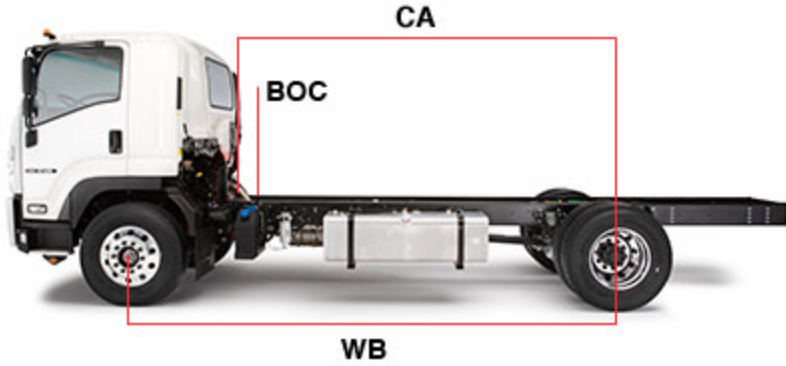

Driver/Passenger Weight	350.0 lbs.
Wheelbase (WB)	152 inches
Cab-to-Axle (CA)	127 inches
Body Length	
Body Weight	
Back of Cab (BOC)	10.4 inches

**\*\* You must fill in body length and weight to enable body and payload weight calculations.**

Front Wt.	6,925.37 lbs.	65%
Rear Wt.	3,768.13 lbs.	35%
GVWR	25,950.00 lbs.	
GVW	10,693.50 lbs.	
Remaining Payload Weight	15,256.50 lbs.	

Weight (lbs.)	Front	Rear	Total
Chassis	6,448.00	3,540.00	9,988.00
Chassis Equipment	127.37	228.13	355.50
Subtotal	6,575.37	3,768.13	10,343.50
Driver/Passengers	350.00	0.00	350.00
Body/Body Equipment	0.00	0.00	0.00
Payload	0.00	0.00	0.00
Total	6,925.37	3,768.13	10,693.50
GAWR/GVWR	12,000.00	21,000.00	25,950.00
GCWR			33,000.00

## Chassis Equipment:

Code	Item	Center of Gravity	Front Axle	Rear Axle	Total
G1	White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank		0.00 lbs.	0.00 lbs.	0.00 lbs.
34L	21,000 lbs. capacity		0.00 lbs.	0.00 lbs.	0.00 lbs.
SAS	Multi leaf, bolted		0.00 lbs.	0.00 lbs.	0.00 lbs.
THF	50 Gallon Fuel Tank Capacity	97.54 inches behind the front axle	127.37 lbs.	228.13 lbs.	355.50 lbs.
5S8	11R22.5 G		0.00 lbs.	0.00 lbs.	0.00 lbs.
011	5.571:1		0.00 lbs.	0.00 lbs.	0.00 lbs.

## Driver/Passengers:

	Center of Gravity	Front Axle	Rear Axle	Total
Driver	front axle	350.00 lbs.	0.00 lbs.	350.0 lbs.

Current report content is based on data as of 2022-07-11 12:15:27. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



# LILLEY ISUZU TRUCK

Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FVR Diesel, De-Rate to 25,950 GVWR (2023 FVR De-Rate, MW1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

## Warranty

### 2023 MY Only

**Warranty Limitations:** *Time or Mileage, Whichever Comes First*

<b>New Truck Warranty</b>	<b>Time in Years</b>	<b>Vehicle Miles</b>
<i>Basic</i>	3	<i>Unlimited</i>
<i>Engine*</i>	3	<i>Unlimited</i>
<i>Transmission**</i>	3	<i>Unlimited</i>
<ul style="list-style-type: none"> <li>• <i>Drive Axle</i></li> <li>• <i>Driveshaft</i></li> <li>• <i>Front Axle I-Beam</i></li> <li>• <i>Crossmembers</i></li> <li>• <i>Flywheel Housing</i></li> </ul>	3	<i>Unlimited</i>
<i>Frame Rails</i>	3 5 <sup>†</sup>	<i>Unlimited</i> <i>Unlimited<sup>†</sup></i>
<i>Corrosion (Rust Through)</i>	4	<i>Unlimited</i>
<i>Roadside Assistance</i>	3 5 <sup>††</sup>	<i>Unlimited</i> <i>100,000<sup>††</sup></i>
<b>Emission Warranty</b>	<b>Time in Years</b>	<b>Vehicle Miles</b>
<i>Federal Emission /Control System<sup>†††</sup></i>	5	<i>100,000</i>
<i>CARB Emission /Control System<sup>†††</sup></i>	5	<i>150,000</i>
<i>GHG Emission</i>	5	<i>100,000</i>
<i>Tires</i>	2	<i>24,000</i>

\*The Cummins engine is warranted separately by Cummins.

\*\*The Allison Automatic Transmission is warranted separately by Allison Transmission.

†After 3 years, coverage is 50% labor and parts for up to 5 years.

††Tows related to emissions issues may be covered for up to 5 years or 100,000 miles (whichever comes first).

†††Emission components are covered by either Isuzu or Cummins; see your Isuzu dealer for details.

The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. See your authorized Isuzu dealer for warranty details.

Current report content is based on data as of 2022-07-11 12:15:27. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

2023 Isuzu FVR Diesel, De-Rate to 25,950 GVWR (2023 FVR De-Rate, MW1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

## Optional Equipment

Options	Code	Description
	IY4	Delete radio
	UZF	Back up alarm
	IH2	Engine emergency shutdown system HWT, LWL, LOP
	IY9	Engine idle shutdown (timer set at 3 minutes for engine shutdown)
	I9A	Engine idle shutdown (timer set at 5 minutes for engine shutdown)
	IL9	PTO enable switch and engine idle up switch recommended for PTO and idle applications only
	I4K	Keyless entry system including two keypads as standard
	I1L	Speed limited to 58 MPH
	I2L	Speed limited to 65 MPH
	I4L	Speed limited to 70 MPH
	I3L	Speed limited to 68 MPH
	I7L	High visibility seat belt (driver seat only)
	I8L	High visibility seat belt (driver and RH passenger seat)
	I2Q	96" wide heated mirrors (flat & convex)
	I3Q	96" wide heated remote mirrors (heated flat & convex, remote flat only)
	I4Q	102" wide standard mirror heads
	I5Q	102" wide heated mirrors (flat & convex)
	I6Q	102" wide heated remote mirrors (heated flat & convex, remote flat only)
	I8P	Fire extinguisher (5 lbs) and triangle kit
	IF6	Fire extinguisher (2.5 lbs) and triangle kit
	I1V	Audio System with 7" diagonal color touch screen
	I2V	Audio System with 7" diagonal color touch-screen with backup camera (camera shipped loose)
	IV8	Seat Covers standard cab
	I7V	Aluminum wheels: 4 aluminum wheels + 2 steel rear inner wheels
	I8V	Aluminum wheels: 6 aluminum wheels
	I4V	Forward collision and lane departure warning (Mobileye)
	I3Z	Spare keys (2 additional, 4 keys in total)
	I79	Block heater and oil pan heater with receptacle
	I72	Block heater with receptacle
	I2M	Delete cruise control switch
	I6L	LED lighting package
	I6B	AGM batteries (825 CCA x 2)
	CEW	CARB Emissions Warranty
	I8T	Chrome Grille

Current report content is based on data as of 2022-07-11 12:15:27. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



# LILLEY ISUZU TRUCK

Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu FVR Diesel, De-Rate to 25,950 GVWR (2023 FVR De-Rate, MW1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank


## Turning Circle

Specification Summary	
<b>Model</b>	MW1G1
<b>Front Axle 40C</b>	Dana E1254-W 12,000 lbs. capacity
<b>Wheelbase 39W</b>	152" Wheelbase
<b>Front Wheels Front Tires</b>	

Current report content is based on data as of 2022-07-11 12:15:27. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

2023 Isuzu FVR Diesel, De-Rate to 25,950 GVWR (2023 FVR De-Rate, MW1 152"WB, 127"CA, 25,950 GVWR. White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank

## Turning Circle

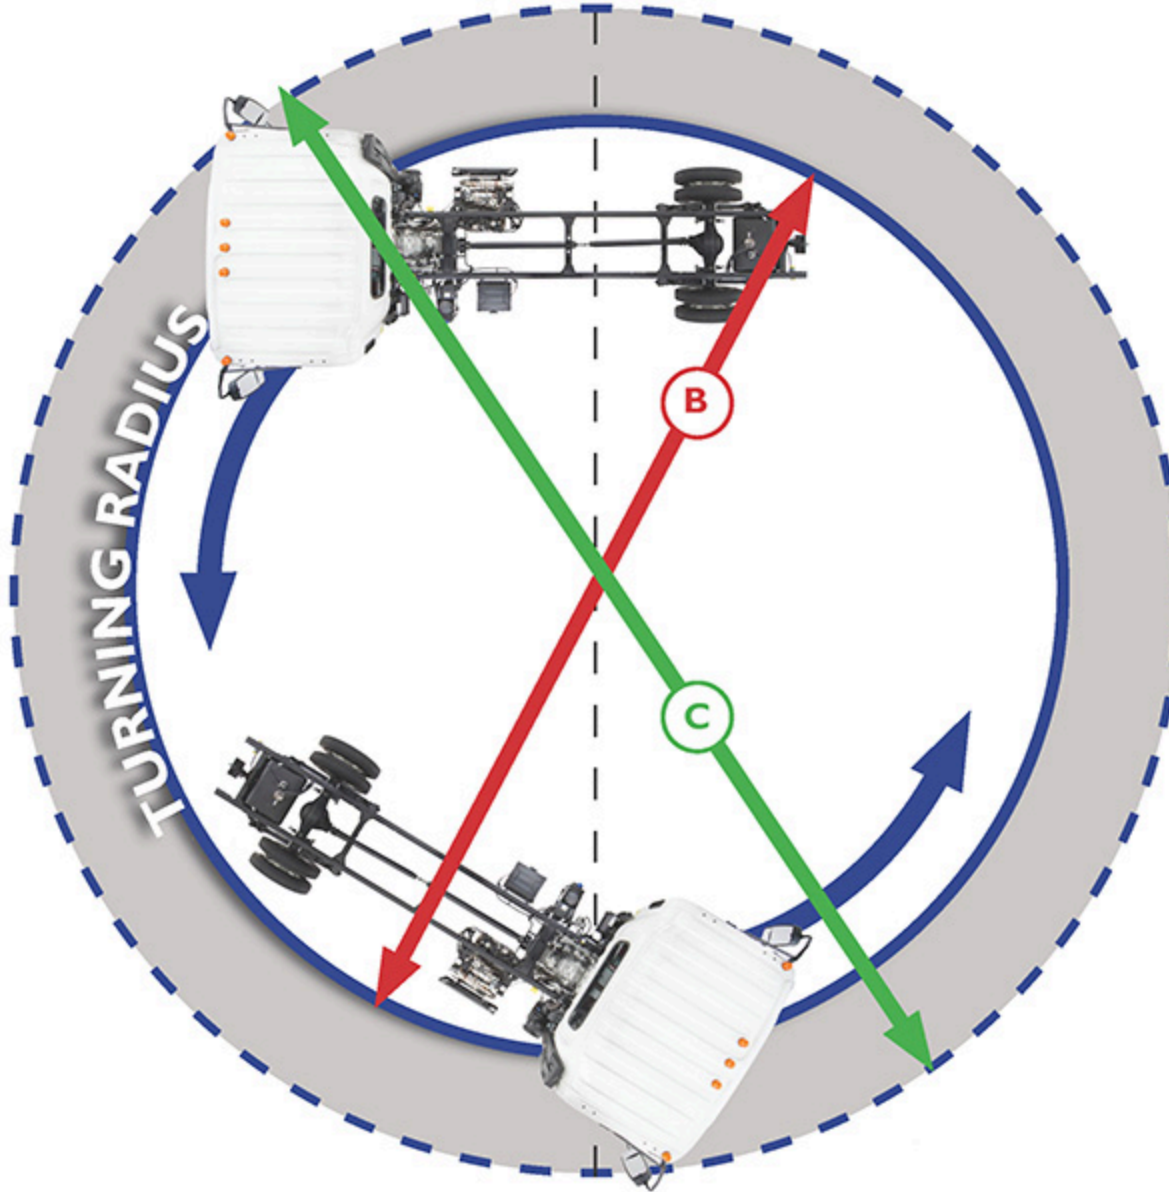

**A: Inside Wheel Cut Angle: 50.00°**

**B: Minimum turning diameter, Curb to Curb: 43.70'**  
Curb to Curb diameter is measured from the outside of the front tire.

**C: Minimum turning diameter, Wall to Wall: 48.70'**  
Wall to Wall diameter is measured from the outermost part of the cab.

Current report content is based on data as of 2022-07-11 12:15:27. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.