


## pipe repair packer

The pipe repair packer adopts imported special rubber combined with double-layer high-strength elastic fiber structure, and is extruded and vulcanized. CCTV connection is used. It is suitable for cracks, water leakage, dislocation and partial corrosion of different pipelines. Suitable for pipelines of various materials from 200mm to 1200mm.



1. Glass fiber.

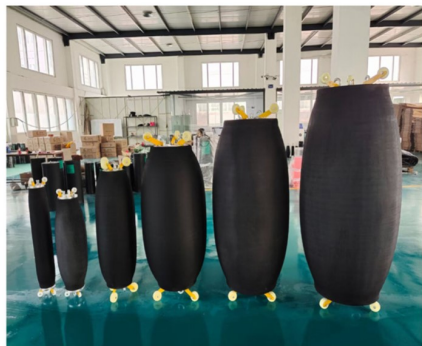

2. Stir A and B according to 2:1.



3. Pour the stirred resin on the glass fiber.



4. Scratch evenly on the fiber cloth.



5. Wrap the coated fiber cloth on the pipeline rehab product.



6. Bundle up with thin iron wire.



7. Drag the pipeline rehab product into the pipeline within 10-15 minutes after the resin is stirred.



8. Inflate and repair for 30 minutes.



9. After repairing, take out the pipeline rehab product.

## Flexible Various Diameter Pipe Repair Packers SRPF 8"-12"

### Hebei Guchen Engineering Rubber Co., Ltd

- ◎ 1/4" Pneumatic Connection
- ◎ Pipe Diameter Range: 8in to 12in
- ◎ inflatable pressure 28 psi
- ◎ Weight [lbs]: 25lbs
