


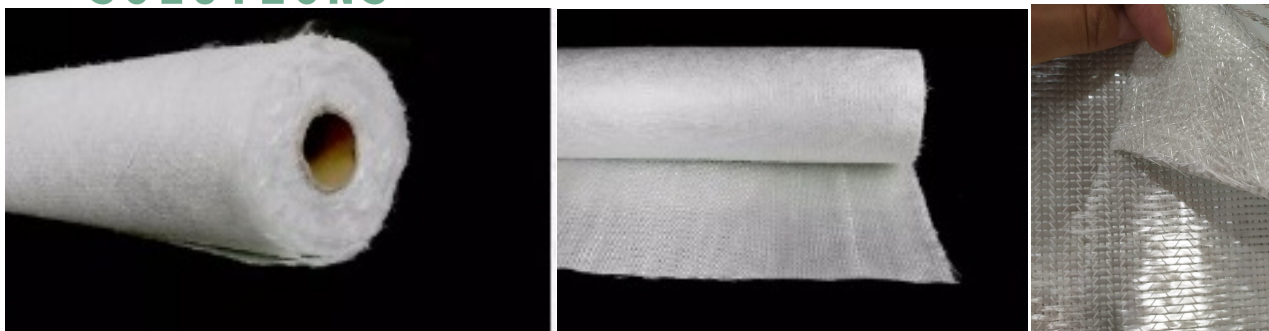

Fiberglass Role E-LTM 1250

Hebei Guchen Engineering Rubber Co., Ltd

Item		Specification	Test Method	Result
Mass per unit area (g/m ²)		825 ± 50	GB/T9914.3	829
Moisture content (%)		≤ 0.20	GB/T9914.1	0.05
Combustible matter content (%)		1-7	GB/T9914.2	2.0
Polyester laminated sheet flexible strength (Mpa)	Standard state	≥ 290	GB/T1449	/
	Humid state	≥ 220	GB/T1449	/

Roll Length X Roll Width: 100' X 4'2"