

Rotary



TIRE CHANGERS

ROTARY WHEEL SERVICE EQUIPMENT

ALIGN **TRUCKS** **Performance** **BALANCE** **Reliable** **Simple**
Dependable **PRODUCTIVE**
INSPECT **LEADER** **FASTER**
EFFICIENT **Durable** **Trusted**
Analyze **WHEELHOUSE** **QUALITY** **HEAVY DUTY**
Easier **Versatile** **Passenger**
Patented **TECHNOLOGY** **CHANGE** **Commercial**
CARS **ACCURATE**
Innovative



www.rotarywheelservice.com

R1150

LEVERLESS

TRUE LEVERLESS TIRE CHANGER WITH VARIABLE SPEED CONTROL

No-lever action, hub mounting changer requires no tire tools and no metal to metal contact.

Simple to operate, simple to maintain using 2 button EASY CONTROLS.

Powerful changer uses a 220v inverter motor, so torque is always available when needed.

0-15 RPM VARIABLE SPEED CONTROL

The motor, which is equipped with an exclusive inverter that regulates rotational speed, offers the operator customizable speed control. Rotational speed slows as the stress on the bead increases, avoiding any damage to the tire.

FEATURES

- Quick locking wheel centering adapter
- Locking system suitable for reverse rims
- Full range of bead clamps and adapters

Patented AUTO-TOUCH™ FUNCTION

Service the most challenging tire and wheel combinations - low profiles, runflats, exotic rims and other specialty jobs.

Change difficult light truck combinations such as 17.5" and 19.5" super duty wheels using optional centering adapter VSG1000A15.



EASY ROLLER BEAD-BREAKING FEATURE

- Bead-breaking in correct position
- Easy rotation of the roller
- Automatic roller side-movement
- Memorized position for bead breaking of lower side



TIRE DEMOUNTING

- The tool enters between bead and rim
- Levering on the rim, the tool pulls up the bead, minimizing tire stress



TIRE MOUNTING

Safe and easy mounting with plastic tool, roller and rotating helper PLUS93



WHEEL LIFT



EASY CONTROLS

Quick pedal operated inflation with gauge and balancing valve. Easy to use position roller with up / down controls.

EQUIPPED WITH

- Standard inflater / side bead blaster
- Pneumatic wheel lift
- Double cone
- Reverse protection
- Tire paste lubricant and brush

OPTIONAL ACCESSORIES

VSG1000A87

Universal flange for reverse, and Chrome Clad wheels

VSG1000A102

5 stud kit 110mm long for reverse rims. Used on VSG1000A87

VSG1000A123

Plastic/Chrome Clad adapter for clamping wheels through locking holes

VSG1000A152

Light truck adapter for centering locking tire changer - 19.5" wheels

VSG1000A118

Match mounting roller

VSG1000A86

Reposition-able mirror

VSG1000A135

Bead breaker



SCAN CODE FOR PRODUCT VIDEO

TECHNICAL DATA	R1150
Handle wheels from*	10"-26" / 12"-28" / 14"-30"
Maximum tire width	15"
Maximum tire diameter	45"
Bead breaker power (each arm)	2,645 Ft/Lbs
Bead breaker movement	Automatic
Rotation motor	2Hp / 1,5 Kw inverter
Recommended air supply	115-145 PSI / 8-10 bar
Power supply**	220v / 10 / 60 Hz

* 3-position base can be adjusted to fit larger wheels up to 30"

**SHIPS WITH NEMA L6 - 20 PLUG

R247D.CL

CENTER LOCKING HIGH VOLUME SWING ARM CHANGER

Center post design and productivity features make this the go-to pro performance swing arm tire changer for the busiest tire centers.

Easy to use center post mounting increases productivity and reduces the risk of wheel damage. Comes standard with metal and plastic mounting and demounting heads.

FEATURES

- Quick locking wheel centering system
- Integrated wheel lift
- Lower bead lifting roller
- Pneumatic top bead pressing tool
- Hand controlled side bead breaker
- 220v drive motor provides needed torque
- Storage cabinet
- Tire paste lubricant and brush

OPTIONAL ACCESSORIES

VSG1000A87

Universal flange for reverse, and Chrome Clad wheels

VSG1000A102

5 stud kit 110mm long for reverse rims. Used with VSG1000A87

VSG1000A11

Bead tire lever

VSG1000A18

Bead pushing roller

VSG1000A123

Plastic/Chrome Clad adapter for clamping wheels through locking holes

VSG1000A152

Light truck adapter for centering locking tire changer - 19.5" wheels



VARIABLE SPEED CONTROL INVERTER

Regulates rotational speed by slowing as the stress on the bead increases avoiding any damage to the tire. The double-acting bead breaker cylinder is designed to work on low-profile and large steel or alloy rims.



INTEGRATED WHEEL LIFT

TECHNICAL DATA R247D.CL

Rim clamping	10"-30"
Maximum rim width	15"
Maximum tire diameter	47"
Max. bead breaker opening	15"
Bead breaker cylinder power at 145 psi	6,745 LBS
Rotation motor	2Hp / 1.5 Kw inverter
Recommended air supply	115-145 PSI / 8-10 bar
Power supply*	220v / 1Ø / 60 Hz VARIABLE SPEED

*SHIPS WITH NEMA L6 - 20 PLUG

R145/R145DR

AUTOMATIC TILTBACK CHANGERS

High performance, top-of-the-range tire changers model with double-acting bead breaker cylinder.

Designed for low-profile and large-sized steel or alloy rims. Works easily on any wheel up to a maximum width of 17".

FEATURES

- 2 position centering lock / 10" - 26" range
- Double synchronization for load distribution
- Adjustable tool guide for alloy rim protection
- Bolt caps to prevent hooking of air hoses
- Integrated helper arm included
- Lower bead lifting roller
- Pneumatic top bead pressing tool
- Filter / Tire paste lubricant and brush

R145DR TILTBACK VSC / Variable Speed Control

Inverter 0-16 Variable Speed Control

Designed with an innovative electrical motor inverter, techs are able to regulate the chucking table rotation speed to reduce the stress on the bead to avoid any damage to the tire. 220V drive motor. Model features a hand-controlled bead breaker.

R145DR FI Configuration / Quick inflation for tubeless tires, includes gauge

STANDARD ACCESSORIES

VSG800A117 (2 x kit)

Tool protection kit for metal mount / demount head

VSG800A6 (24" - 26")

Clamp Protectors (4 pcs)

VSG800A26

Blade with adjustment inclination. Allows to break the bead at the correct angle. 145D Model.

VSG800A11 Qty. of 1
Bead breaker protection
VSG800A11K Qty. of 5

OPTIONAL ACCESSORIES

SMALL WHEEL ADAPTER VSG800A111

Reduces clamping capacity to 8" for ATVs and lawn equipment tires. - requires VSG800A107 wheel clamps

VSG800A107 Motorcycle Adapters

Wheel reducer adapters, -2", -4" from outside



TILTBACK CHANGER
With integrated helper arm

STANDARD PLASTIC TOOL HEAD VSG800A126

Tool head with support for tilt back units.



SCAN CODE FOR
PRODUCT VIDEO

TECHNICAL DATA R145 / R145DR

Chuck rotation speed (rev/min)	0-16 rpm / 7.3 rpm (D version) 7.3 rpm (110v version)
Maximum torque to chuck	885 Ft/Lbs (1200 Nm)
Self-centering lock: external	10" - 26"
Self-centering lock: internal	12" - 28.5"
Tool working span	8" - 32"
Maximum tire diameter	45" (1143mm)
Maximum tire width	17" (431mm)
Bead breaker cylinder power at 145 psi	6,745 Ft/Lbs (3060 kg)
Power supply (Model 145) Motor	110v / 1Ø / 60 Hz 1Hp
Power supply* (Model 145DR) Motor	220v / 1Ø / 60 Hz / 1 Hp

*SHIPS WITH NEMA L6 - 20 PLUG

R146R

SWINGARM PRO HIGH PERFORMANCE HIGH VOLUME

Extra-height speedchanger.

Hand controlled bead breaker with a 110v drive motor provides needed torque for difficult assemblies. The gear box is installed between two steel plates avoiding flex.

TECHNICAL DATA	R146
External clamping	10" - 26"
Maximum torque to chuck	885 Ft/Lbs (1200 Nm)
Internal clamping	12" - 28.5"
Max. tire diameter	46" (1200 mm)
Max. tire width	15" (380 mm)
Max. bead breaker opening	15" (380 mm)
Bead breaker cylinder power at 145 psi	6,745 Ft/Lbs (3060 kg)
Power supply	110v / 1Ø / 60 Hz

R146RP

Hand Controlled with Helper Arm

INCLUDES PLUS91SA AIR-DRIVEN HELPER ARM*

Bead top pressing and tire lifting device for large and special tires. P Models feature a lower bead lifting roller and pneumatic top bead pressing tool.

*PLUS91SA FOR R146RP IS NOT INSTALLED PRIOR TO DELIVERY.

R146RA

Hand Controlled / Air Motorized Changer

R146RAP

with Plus91SA Helper / Air Motorized Changer

FEATURES

- Hand controlled bead breaker
- Extra large 46" frame
- Air tank located in column
- Removable pedal assembly for maintenance
- Valve tray
- Tire paste lubricant and brush

VSG800A117 (2 x kit)

Tool protection kit for metal mount / demount head

VSG800A6 (24" - 26")

Clamp Protectors (4 pcs)

VSG800A11 Qty. of 1

Bead breaker protection

VSG800A11K Qty. of 5

OPTIONAL ACCESSORIES

SMALL WHEEL ADAPTER VSG800A111

Reduces clamping capacity to 8" for ATVs and lawn equipment tires. - requires VSG800A107 wheel clamps

VSG800A107 Motorcycle Adapters

Wheel reducer adapters, -2", -4" from outside

STANDARD PLASTIC TOOL HEAD

VSG800A60

Tool head with support for swing arm units.



Shown:
R146RP with
PLUS91SA
HELPER ARM



SCAN CODE FOR
PRODUCT VIDEO

R140i

SWINGARM SHOP TOP QUALITY / ENTRY LEVEL PRICE

Heavy duty swing arm structure with exclusive 110v single speed motor provides needed torque and the rigid self-centering chuck with wide clamping range handles a variety of needs. Equipped with galvanized, double-operating bead breaker cylinder.

FEATURES

- Tire Diameters of 40"
- 22" Outside Clamping
- 24" Inside Clamping
- Removable pedal assembly for easy maintenance
- Tire paste lubricant and brush

OPTIONAL UPGRADE PLUS91N HELPER ARM

Bead top pressing and tire lifting device for large and special tires.



TECHNICAL DATA	R140i
External clamping	11" - 22"
Internal clamping	13" - 24.5"
Max. tire diameter	40.5" (1030 mm)
Max. tire width	12" (305 mm)
Max. bead breaker opening	15" (380 mm)
Bead breaker force	6,745 Ft/Lbs (3060 kg)
Rotation speed	7.3 rpm
Max. torque turntable	885 Ft/Lbs (1200 Nm)
Power supply	110v / 1Ø / 60 Hz

OPTIONAL MOTORCYCLE WHEEL CLAMPS

VSG800A99

+ 5" from the outside for 20" - 22" tables

VSG800A111 SMALL WHEEL ADAPTER

Reduces clamping capacity to 8" for ATVs and lawn equipment tires. Use with rim clamp tire changers only - requires VSG800A99 wheel clamps.

STANDARD PLASTIC TOOL HEAD

VSG800A60

Tool head with support for swing arm units.



R501PLUS

SPEEDCHANGER HD PATENTED/ SUPER FAST TIRE CHANGER

Dismount and mount a truck tire in 30 seconds.

A patented operating system with four rollers positioned on both sides of the wheel in opposite positions. Simple tire dismounting: while the front bead-breakers keep the bead in the drop center, the rear breakers continue their course until the dismounting is complete. The bead-breakers are supported by two separately controlled arms and each has two rollers: one conical which pushes on the bead and one cylindrical which pushes the side of the tire.

FEATURES

- Adjustable arm position
- Quick loading
- Hydraulic clamping / chucking table
- Stand-by function
- no noise when not in operation
- Hydraulic controls
- Plastic bead breakers protect rim
- VSG108A3 lever
- Tire paste lubricant and brush



STANDARD CLAMP PROTECTOR VSG108A2
Protects aluminum wheels / 4x kit




SCAN CODE FOR PRODUCT VIDEO

HYDRAULIC CLAMPING

4"(90mm) Min. clamping
13"(330mm) Min. height

TECHNICAL DATA	R501PLUS
Chucking unit rotation motor	2.7 Hp / 2 kW
Hydraulic drive unit motor	1 Hp / 1.5 kW
Maximum tire diameter	52" (1320mm)
Max. tire width	21" (540mm)
Bead breaker power	13,300 Ft / Lbs / 18000 N
Maximum assembly weight	2,645 lbs / 1200 kg
Chuck rotation speed (rev/min)	8
Max. torque to chuck	585 Ft/Lbs / 2600 Nm
Power supply	220v / 3Ø / 60 Hz



SERVICE TIRE DIAMETERS UP TO 52"



OPTIONAL ACCESSORIES

VSG90A6
Aluminum rim clamp

VSG108A24
Disc for wheels with lock ring / agricultural wheels



R560

MOBILE HD WORKSHOP SERVICE Easy to use changer.

This easy-to-use changer is designed for closed vans or small workshops. Controls are protected on changer console and the hydraulic clamping and chucking table are suitable for agricultural tires with optional VSG108A22 wheel disc.

FEATURES

- Hydraulic clamping / chucking table
- Hydraulic up / down movement
- 4" minimum clamping - 13" minimum height
- Standard aluminum tool for tube tires
- VSG108A3 lever
- Tire paste lubricant and brush



STANDARD CLAMP PROTECTOR VSG108A2
Protects aluminum wheels / 4x kit



SCAN CODE FOR PRODUCT VIDEO

STANDARD ROLLER
Easy setting for tubeless tires

TECHNICAL DATA	R560
Chucking unit rotation motor	1.5 Hp / 1.1 kW
Hydraulic drive unit motor	2.7 Hp / 2 kW
Rim diameter	11" - 27"
Maximum tire diameter	51" (1300mm)
Max. tire width	37.4" (950mm)
Bead breaker power	3,597 Ft/Lbs / 16000 N
Maximum assembly weight	2,645 lbs (1200 kg)
Chuck rotation speed (rev/min)	8
Max. torque to chuck	1253 Ft/Lbs (1700 Nm)
Power supply*	220v / 1Ø / 60 Hz



SERVICE TIRE DIAMETERS UP TO 51"



OPTIONAL ACCESSORIES

VSG90A6
Aluminum rim clamp

VSG108A22
Disc for wheels with lock ring



R511

COMMERCIAL HD

SUPER DUTY CHANGER

SERVICE TRUCK, BUS, SUPER SINGLE, AGRICULTURAL and LOCK RING.


The operating dimensions of the clamping unit and the head-tool carriage of this heavy-duty tire changer allows it to service a wide range of wheels.

The controls enable users to regulate the speed of the tool holding carriage with lever type hydraulic distributions


FEATURES

- Rotational control on portable wired stand
- Cable control unit
- Quick locking manual rotation tool
- Patented VSG108A3 bead lever
- Tire paste lubricant and brush

TECHNICAL DATA	R511
Chucking unit rotation motor	3 Hp / 2.2 kW
Hydraulic drive unit motor	1 Hp / .75 kW
Rim diameter	11" - 27"
Maximum tire diameter	64" (1640mm)
Maximum tire width	36.4" (925mm)
Chuck rotation speed (rev/min)	8
Power supply*	220v / 1Ø / 60 Hz



HYDRAULIC CLAMPING
4" (90mm) Min. clamping
13" (330mm) Min. height



VSG108A2
Standard clamp
protections for
alloy rims / 4 x kit



STANDARD BEAD LEVER
VSG108A3 Tire Lever



**QUICK MANUAL
ROTATION**



SERVICE TIRE DIAMETERS UP TO 64"

R541

COMMERCIAL HD


LEVERLESS SINGLE CARRIAGE MOVEMENT

ELECTROHYDRAULIC CHANGER FOR TRUCKS, AGRICULTURAL AND EARTHMOVING VEHICLES.

The dimensions and work strokes ensure maximum efficiency for an entire range of tires. The two-speed rotation chucking table can accommodate rims up to 44" and 56" (with VSG108A12 extensions set). With leverless action, the tool operates between bead and rim, pulls up the bead and de-mounts the tire.

FEATURES

- Cable control unit
- Rotational control on portable wired stand
- Double ratcheting locking arm
- Double speed for chucking table rotation
- Patented VSG108A3 bead lever
- Tire paste lubricant and brush




VSG108A2
Standard clamp
protections for
alloy rims / 4 x kit

**LEVERLESS
OPERATION
TUBE and
TUBELESS
TIRES**



**HYDRAULIC ARM
MOVEMENT**

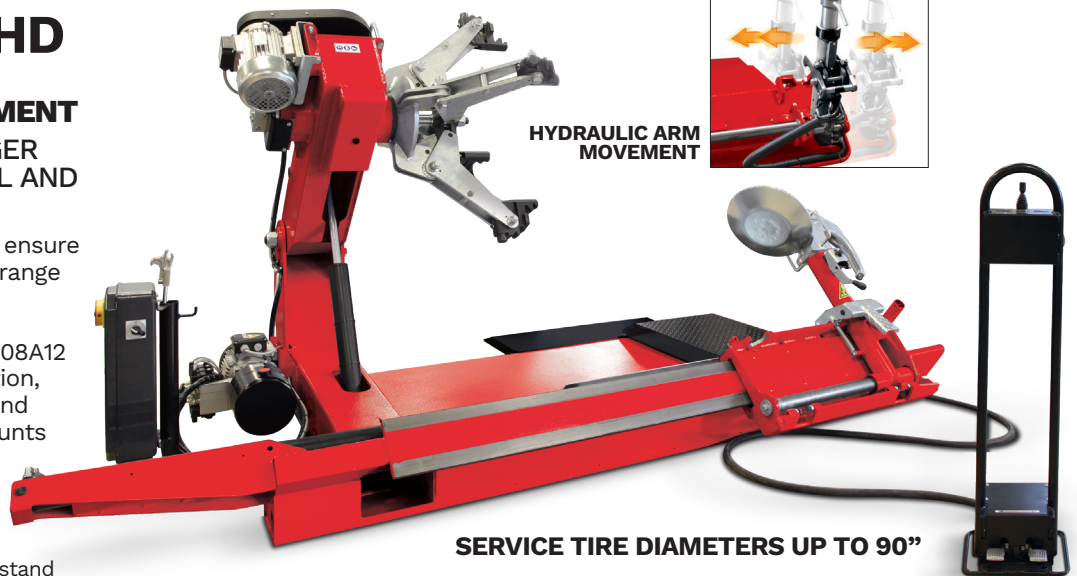

SERVICE TIRE DIAMETERS UP TO 90"

TECHNICAL DATA	R541
Chucking unit rotation motor	1.75 Hp / 1.1-1.3 kW
Hydraulic drive unit motor	2.95 Hp / 2.2 kW
Rim diameter	11" - 43"
With VSGA108A12 adapters	44" - 56"
Maximum tire diameter	90.5" (2300mm)
Maximum tire width	51" (1300mm)
Chuck rotation speed (rev/min)	4-8
Power supply	220v / 3Ø / 60 Hz

R573

R573BT Cordless Controls
 Communicates via Bluetooth® transmission
 SPECIAL ORDER ONLY / Contact factory for details

EXTREME HD UNIVERSAL TIRE CHANGER FOR EXTREME WHEEL DIMENSIONS

SPECIAL ORDER ELECTROHYDRAULIC CHANGER FOR TRUCKS, AGRICULTURAL AND EARTHMOVING VEHICLES.


HIGH BEAD BREAKING FORCE
 The considerable bead breaking force makes mounting and demounting tires effortless.

MULTIPLE ADJUSTABLE GUIDES
 The electro-brake allows immediate stopping of the rotation to avoid any damage to tires.

STAND-BY FUNCTION
 After 5 sec. the machine has not been used, the motor will turn off.

FEATURES

- Console cable control unit with metal sheath
- Double speed rotation
- Quick locking manual rotation tool
- B530800 long bead lifting lever
- VSG108A25 / clamp for earth-moving wheels
- Tire paste lubricant and brush



VSG108A2
 Standard clamp protections for alloy rims / 4 x kit

OPTIONAL ACCESSORIES

VSG108A13 Rings Lever



VSG108A3 Tire Lever




AUTOMATIC LIFTING and ROTATION

SERVICE TIRE DIAMETERS UP TO 106"




Rotational control on portable wired stand



HYDRAULIC CLAMPING

4" (90mm) min. clamping
 13" (330mm) min. height
 19" and 22.5" truck wheels

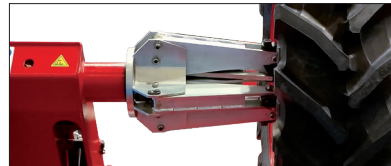

Oversized chucking dimension allows work on larger tires without interference. Reach 50" wheels without extensions or wheels from 51" to 60" with optional VSG108A39 adapter set.

TECHNICAL DATA	R573
Chucking unit rotation motor	2.95 Hp / 2.2 kW
Hydraulic drive unit motor	3.35 Hp / 2.5 kW
Rim diameter	11" - 50"
With VSGA108A39 adapters	51" - 60"
Maximum tire diameter	106" (2700mm)
Maximum tire width	69" (1750mm)
Chuck rotation speed (rev/min)	1 - 5 - 10
Power supply	220v / 3Ø / 60 Hz

OPTIONAL COMMERCIAL HD ACCESSORIES



VSG108A12 (4 x kit)
 Set of extensions to increase clamping capacity
 For R541 changer

VSG108A39 (4 x kit)
 Extensions for R573 changer



VSG108A25 Clamp
 for steel wheels



VSG90A6 Clamp
 for alloy wheels



VSG108A34
 Pneumatic bead pushing device




B530800
 Long bead lifting lever



TIRE CHANGERS

WHEEL BALANCERS

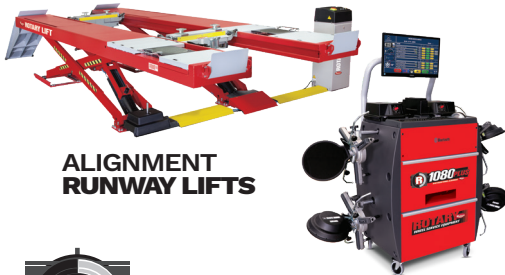

ALIGNMENT RUNWAY LIFTS

ALIGNMENT SYSTEMS



Rotary's line of premium equipment is manufactured to the highest standards of quality and durability to help you perform the job right the first time, every time.

Offer your customers top quality tire and wheel service by putting Rotary to work for you.

Rotary Wheel Service Equipment

2700 Lanier Drive / Madison, IN 47250, USA

www.rotarywheelerservice.com



North / South America Information

Sales:
800.640.5438
userlink@rotarylif.com

Tech. Support:
800.445.5438
techlink@rotarylif.com

Global Contact Information

USA: 1.812.273.1622
Canada: 1.905.812.9920
Latin America / Caribbean: 1.812.273.1622
Brazil: +55.11.4534.1995

Government Sales: 800.445.5438 X5655



For additional information:
rotarylif.com/Government-Purchasing-Assistance/

Lit# **Rotary Wheel Service Changers Brochure.2019.10**

©2019 VEHICLE SERVICE GROUPSM. Printed in U.S.A., All Rights Reserved. Unless otherwise indicated, ROTARY, VEHICLE SERVICE GROUPSM, DOVER and all other trademarks are property of Dover Corporation and its affiliates.

Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.