



**Pump specifications:**

Type.....	BA150E D285
Max. flow .....	2200 US GPM (500 m3/hour)
Max. pressure.....	125 ft. / 54 PSI (38 mwc)
Connections.....	6" (DN150)
Solids handling .....	3,15" (80 mm)
Impeller type .....	Open impeller
Priming system .....	BBA MP50
Engine .....	Hatz 4H50TIC
Emission standard .....	Tier 4 final
Canopy .....	M10-23X
Sound level.....	64 dB(A) at 33 ft.
Dry weight.....	3630 lbs. (1650 kg)

**FEATURES**

**BA auto prime pump**

The BA range of pumps has been designed with a clear focus on reliability, efficiency and durability. Featuring a fully automatic priming system, the BA series pumps quickly prime and re-prime, even from dry conditions. The heavy build style of both pump and canopy make the BA range perfect for use in the demanding construction market.

**World-class performance**

The BA range is built to be deployed on the most demanding applications. Using high efficiency pumps and state-of-the-art diesel engines, the pumps offer maximum performance at minimal cost, fully in-sync with the company philosophy of "Lowest cost of ownership".

**Sustainability**

- High efficiency pumps minimising fuel consumption
- Corrosion free hot dip galvanized canopy
- Corrosion free composite door panels and powder coated plating
- 100% Oil-spill free priming system
- Fully self contained unit featuring a double wall fuel containment tank and fluid containment system eliminating fuel/oil spills at all times

**Complete package designed & built by BBA Pumps**





- Complete in-house design & production
- Over 60 years of experience in the market
- Extensive testing facility in-house
- Contemporary & functional design
- Durable & eco-friendly materials
- Custom builds available


**After sales service & product support**

- Single supplier for parts, spares & accessories
- Dedicated customer help-desk (24h service)
- Dedicated service department in-house
- Global parts distribution network
- Optional global on-site servicing
- Extensive training options available (technical & commercial), on-site or in-house

**PERFORMANCE CURVES (1900 RPM)**

Continuous duty according ISO 9906

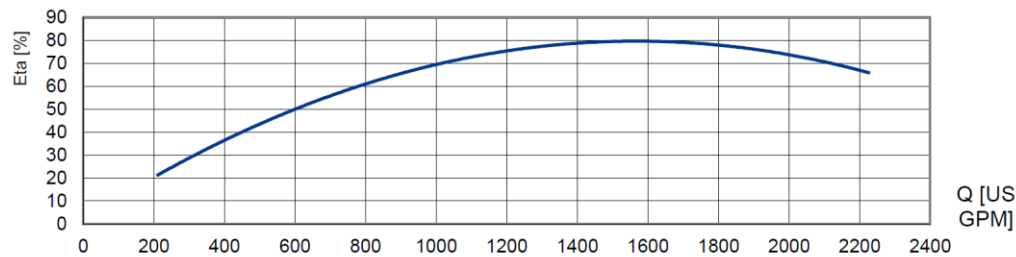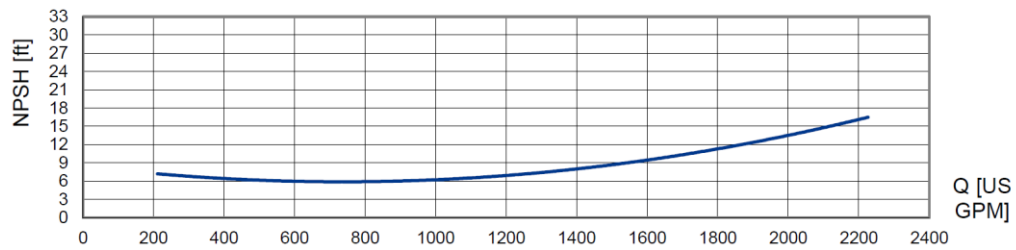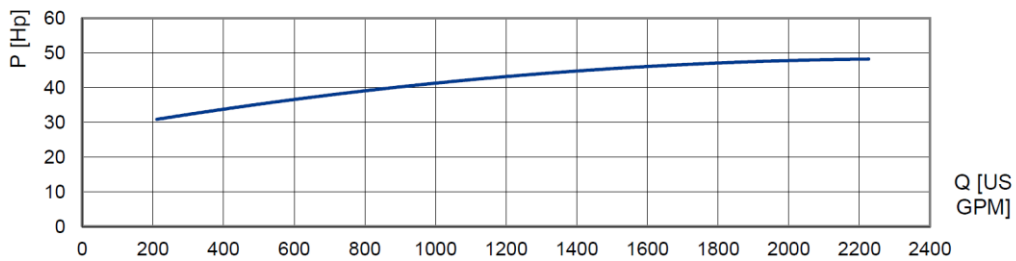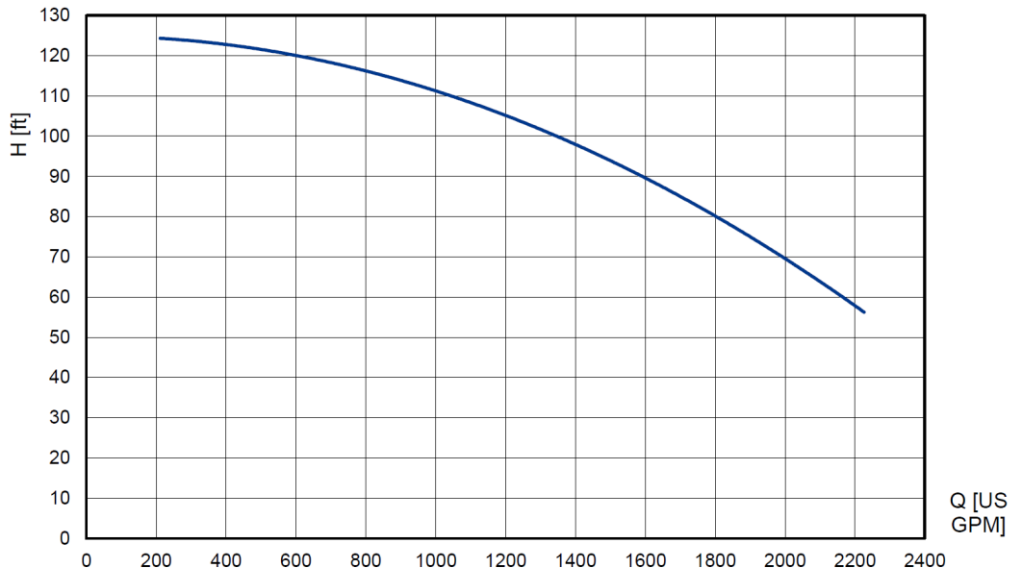

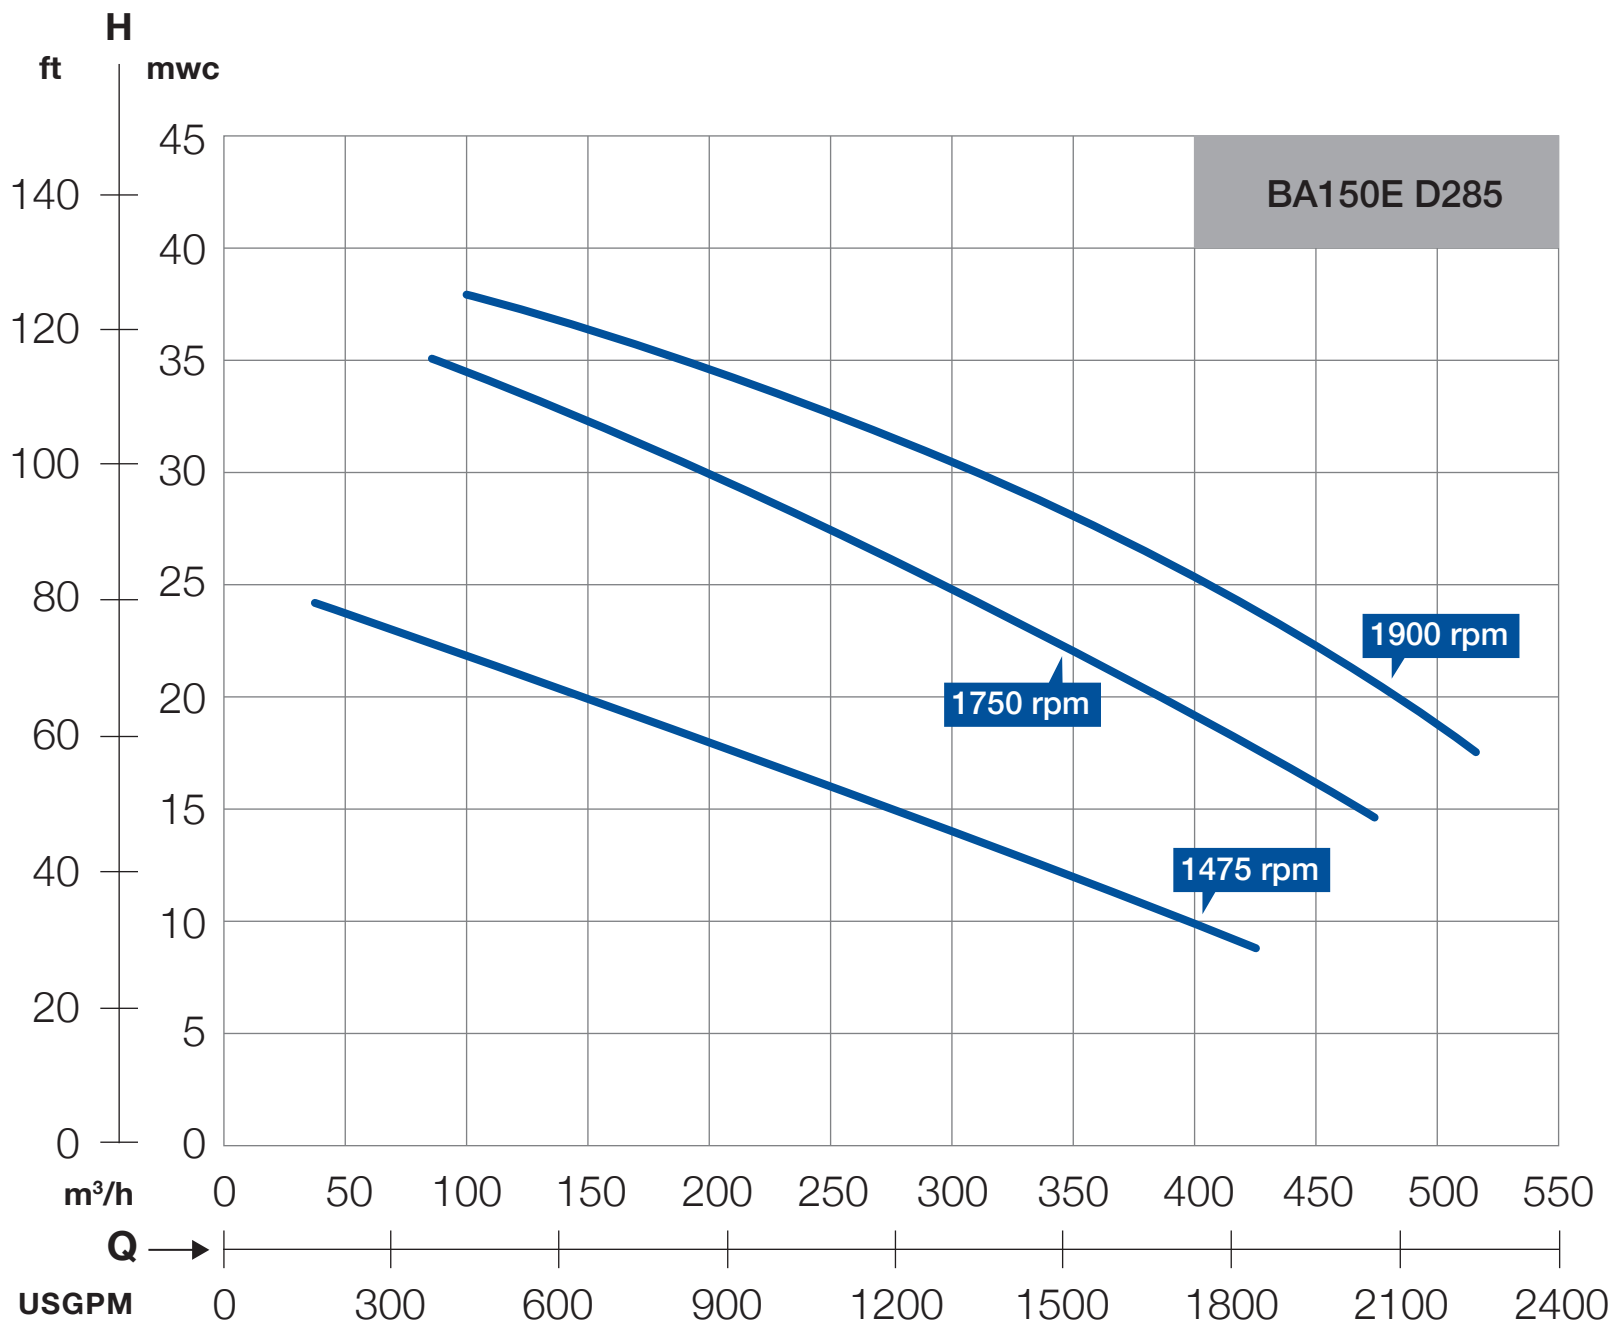

**STANDARD TECHNICAL SPECIFICATIONS**

**BBA auto prime pump**

Pump type.....	BA150E D285
Max. flow.....	2200 US GPM (500 m <sup>3</sup> /hour)
Max. head.....	125 feet / 54 PSI (38 mwc)
Impeller type.....	Open impeller
Solids handling.....	3.15 inch (80 mm)
Pump casing.....	Cast iron GG20
Impeller.....	Chrome Moly 42CrM04
Self-cleaning wear plate.....	Chrome Moly 42CrM04 (cutter slots)
Pump shaft.....	C45
Shaft seal.....	Mechanical seal
Seal faces.....	Tung/Sic
Seal rubbers.....	Viton



**BBA priming system**

Pump type.....	BBA MP50 Diaphragm pump
Air handling capacity.....	30 CFM (50 m <sup>3</sup> /h)
Max. vacuum.....	29 inHg (8.5 m)
Drive.....	Toothed belt (continuous drive)
Float box.....	Aluminium
Non return valve.....	Cast iron GG25
Check valve disc.....	Buna-N



**Engine**

Engine brand.....	Hatz
Engine type.....	4H50TIC
Max. power output.....	75 Hp (55.4 kW)
Variable engine speed.....	1300 - 1900 RPM
Fuel consumption.....	220 g/kWh
Displacement.....	1,952 cm <sup>3</sup>
Number of cylinders.....	4
Aftertreatment.....	EGR, DOC
Exhaust emission US.....	Tier 4 Final

**LOFA control panel**

- Auto start/stop system
- Two float switches included (10m cable)
- Switch Manual-0-Auto
- Warning lights
- Safety features to protect the engine
- High resolution 4.3" LCD monitor



**Fuel system**

- PE fuel tank 80 US Gallon (300 L.) net
- Fuel tank cap Ø 4" (100 mm)
- Electronic fuel injection system

**Electrical system & safety features**

- Nominal voltage 12 Volt
- Premium quality battery
- Low oil pressure shut down


**CANOPY M10-23X**

**BBA sound attenuating canopy**

- Canopy type.....M10-23X
- Dimensions L x W x H .....89.4 x 41.3 x 62.8 inch
- Dimensions L x W x H .....2270 x 1050 x 1595 mm
- Basic frame.....Hot dip galvanized
- Roof panel .....Composite roof panel
- Doors .....5 lockable composite doors
- Fuel tank .....PE net 80 US Gallon (300 ltr)
- Fuel tank autonomy .....30 hours (at 1900 rpm BEP)
- Fuel tank cap .....4 inch (100mm)
- Forklift pockets.....Fitted with 2 forklift pockets
- Lifting point .....Fitted with single lifting point
- Stackable .....Canopy is stackable
- Exhaust system .....Fully integrated in canopy
- Additional .....Fitted with oil-water separator and battery isolator switch
- Connections.....Please consult “auxiliary items” in overleaf
- Documentation box.....BBA user manual and warranty book

**BBA E-lift® system**

The M10-23X canopy has been fitted with the BBA E-lift® system. By removing the roof panel, the pump and diesel engine as a whole can be removed from the canopy effortlessly allowing easy preventative maintenance on the pump and diesel engine. In addition, as the canopy is not fitted with padding or insulation materials, it can be cleaned quickly using a pressure washer.

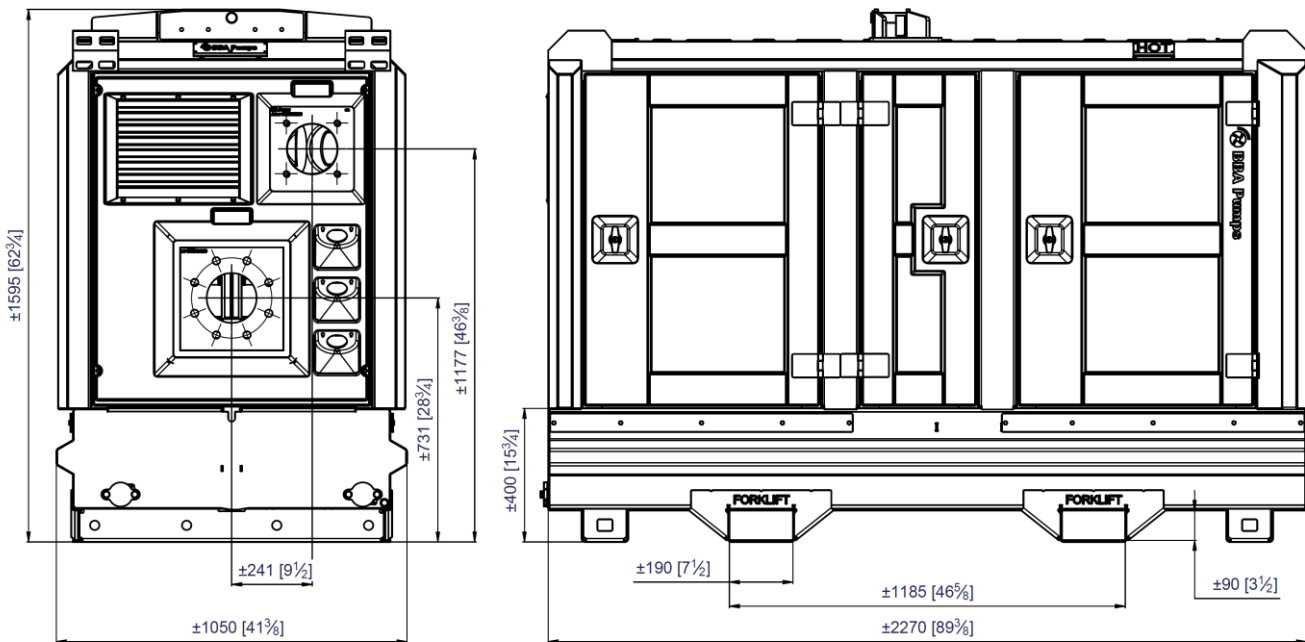

Actual dimensions (in mm & inches) may vary depending on selected quick couplings.




**Open impeller**  
Corrosion and abrasion resistant Chrome Moly (42CrM04) alloy.




**Fuel tank**  
Double wall fuel containment, corrosion-free, 80 US Gallon, high-density polyethylene (HDPE) fuel tank, located in base of canopy.



**Easy inspection**  
Oil glasses, drain valves and fill plugs are all easily accessible.



**Speedy servicing**  
By removing the roof panel, the pump and diesel engine as a whole can be removed from the canopy effortlessly allowing easy preventative maintenance on the pump and diesel engine.



**Large inspection covers**  
Easy access to float box, impeller and non-return valve.



**Safety**  
Extremely durable and lockable T-locks offering perfect grip.




**4 Year limited warranty**  
The BBA limited warranty covers years or operating hours whichever occurs first. For more details please consult the BBA warranty book.




**User Manual BA series**  
Extensive user manual with important information concerning the pump unit, pump installation and safety warnings. Available in several languages.

**AUXILIARY ITEMS**
**Discharge connections**


Art.nr.		Ø inch	Ø mm	Connection
5080873	30°	6	150	ANSI/DIN Flange
5080899	30°	8	200	ANSI Flange
5080876	30° female (cup)	6	150	system B
5080881	30° male (ball/lever)	6	150	system B
5080813	30° female (cup)	8	200	system B
5080809	30° male (ball/lever)	8	200	system B


**Suction connections**

Art.nr.		Ø inch	Ø mm	Connection
5080884	30°	6	150	ANSI/DIN Flange
5080897	0°	8	200	ANSI Flange
5080889	30° female (cup)	6	150	system B
5080890	30° male (ball/lever)	6	150	system B
5080914	0° female (cup)	8	200	system B
5080911	0° male (ball/lever)	8	200	system B


**Suction hose with strainer L=6 metre**

Art.nr.	Ø inch	Ø mm	connection
7047055	6	150	ANSI/DIN Flange
7047058	8	200	Flange K295
7047008	6	150	System B male (ball/lever)
7047038	6	150	System C female (cup/lever)


**Recommended suction pipe diameter (maximum velocity = 4 m/sec)**

US gallons	M3/H	FLOW (L/sec)	4" 100	5" 125	6" 150	8" 200	10" 250	12" 300
1110	252	70	8.91	5.70	3.96	2.23	1.43	0.99
1268	288	80	10.19	6.52	4.53	2.55	1.63	1.13
1427	324	90	11.46	7.33	5.09	2.86	1.83	1.27
1585	360	100	12.73	8.15	5.66	3.18	2.04	1.41
1775	403	112	14.26	9.13	6.34	3.57	2.28	1.58
1902	432	120	15.28	9.78	6.79	3.82	2.44	1.70
2061	468	130	16.55	10.59	7.36	4.14	2.65	1.84
2219	504	140	17.83	11.41	7.92	4.46	2.85	1.98

Pictures used are for illustration purposes only.