

ANTHONY
LIFTGATES, INC.®

AC



CONVENTIONAL SERIES

LIFTING CAPACITIES (LBS): 1600, 2000, 2500

KEY ADVANTAGES

- 1. HD Mechanical Safety Latch**
Redundant-system stowage in addition to hydraulic lock.
- 2. Spring Assist Platform**
Torsion spring provides effortless platform operation.
- 3. EZ Mount**
Ships factory assembled, filled, and tested.
Must attach platform.
- 4. CHS - Centralized Hydraulic System**
All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.
- 5. Lifetime-Warranty Service Free Bushings**
Used at all critical pivot points to reduce wear without the need for routine lubrication.



QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- **Circuit Protection** - 200 Amp fuse protects truck wiring from a "dead short".
- **Marine Duty Potted Toggle Switch** - Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.
- **Industry-Leading Warranty** - 2 years mechanical + 2 years electrical & hydraulic, parts and labor.
- **Pressure Compensated Flow Valve** - Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Anthony 3-Step Powder Coat** - Steel components are washed, shot blast prepped, and coated with premium finish.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS, & CAPACITIES

Model	AC-1600	AC-2000	AC-2500
Capacity (lbs)	1600	2000	2500
Bed Height Range	36" - 57"		
Available Platforms (Load Depth + Ramp)			
	Steel 72" x 36" + 6"		
	Steel 84" x 36" + 6"		
	Steel 90" x 36" + 6"		


Expanded metal, aluminum, and special platforms available.

OPTIONS

- Power down
- Wireless, removable handheld corded, flush mount, or dual control options.
- Galvanized finish with extended warranty
- Cab or ignition cutoff switch
- 5 & 12 ton pintle hook / ball hitch brackets

AC MOUNTING REQUIREMENTS

A Bed Height Adapter Frame	B Bed to top of Clearance	C Mounting Plate
36" - 41"	15 3/4"	35 1/2"
42" - 49"	19"	30 3/4"
50" - 51"	20"	30 1/4"
52" - 53"	21"	29 3/4"
54" - 55"	22"	29 1/8"
56" - 57"	23"	29"

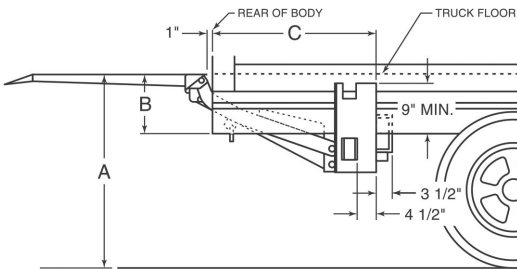

The diagram illustrates the AC mounting requirements on a truck bed. Dimension A is the height from the ground to the top of the adapter frame. Dimension B is the clearance from the top of the bed to the top of the mounting plate. Dimension C is the distance from the rear of the body to the center of the mounting plate. The diagram also shows the truck floor and a 9" MIN. clearance from the floor to the bottom of the mounting plate. The mounting plate is shown with a 1" clearance from the rear of the body and a 3 1/2" clearance from the truck floor. The truck floor is shown with a 4 1/2" clearance from the bottom of the mounting plate.

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com

FREIGHT NOT
INCLUDED IN
PRICE OF UNIT.
FREIGHT WILL
BE BILLED UPON
PURCHASE.