

ANTHONY
LIFTGATES, INC.®

MTU-GLR-WR



MAGNUM TUCKUNDER™

LIFTING CAPACITIES (LBS): 3000, 4000

KEY ADVANTAGES

- 1. Walk Ramp Ready**
Allows easy access to a walk ramp without lowering the liftgate.
- 2. GLR - Gentle Level Ride**
Smooth, level up-down operation. Platform tilts gently at ground and re-levels before lifting cycle begins.
- 3. Lifetime-Warranty Service Free Bushings**
Used at all critical pivot points to reduce wear without the need for routine lubrication.
- 4. Aluminum Wedge Platform**
Large wedge design provides plenty of space and easy loading for all types of cargo.
- 5. Power Down**
Reliable cycle time in all weather conditions.



QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- **Spring Assist Platform**
Torsion springs provide effortless platform operation.
- **Ground Contact Rollers**
Rollers prevent scraping damage to liftgate and concrete or asphalt.
- **HD Mechanical Safety Latch**
Redundant-system stowage in addition to hydraulic lock.
- **Max Duty Dock Bumpers**
Protects liftgate from contact with dock. Includes rubber bumpers.
- **EZ Mount**
Ships factory assembled, filled, and tested for easy installation. Bolt-on-ready floor extension & bumpers.
- **Circuit Protection**
200 Amp fuse protects truck wiring from a "dead short."
- **CHS - Centralized Hydraulic System**
All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.
- **Marine Duty Potted Toggle Switch**
Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.
- **Industry-Leading Warranty**
3 years mechanical + 3 years electrical & hydraulic, parts and labor.
- **Pressure Compensated Flow Valve**
Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Cab Cutoff Switch**
Prevents unauthorized liftgate operation.
- **Premium Polymer Finish**
Steel components are washed, shot blast prepped, and coated for a long-lasting finish.

QUALITY COMES STANDARD


AVAILABLE MODELS, PLATFORMS AND CAPACITIES

Model	MTU-GLR-WR-3	MTU-GLR-WR-4
Bed Height Range	49" - 56"	
Capacity (lbs)	3000	4000
Available Platforms		
All Aluminum 80" x 60" Wedge		

OPTIONS

- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Stainless steel battery box
- Auxiliary power systems
- Third step add-on for dock bumper
- Galvanized finish with extended warranty
- ICC bumper - trailer certified
- Dual, foot-operated cart stops

TRUCK MOUNTING REQUIREMENTS

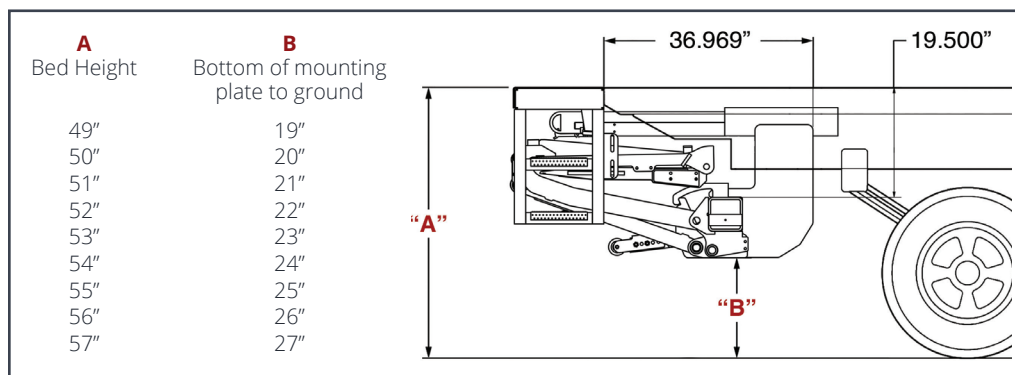

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com

ANTHONY LIFTGATES, INC.® MTU-GLR




*Shown with optional features.

MAGNUM TUCKUNDER™

LIFTING CAPACITIES (LBS):
2500, 3000, 4000, 5000, 6000

KEY ADVANTAGES

- **GLR - Gentle Level Ride**
Smooth, level up-down operation. Platform tilts gently at ground and re-levels before lifting cycle begins.
- **Twin Cylinder Drive**
Powerful lift with low pressure helps to extend hydraulic component life.
- **Wedge Platform**
Wedge design provides easy, secure loading.
- **Power Down**
Reliable cycle time in all weather conditions.
- **Lifetime Warrantied Service Free Bushings**
Used at all critical pivot points to reduce wear without the need for routine lubrication.

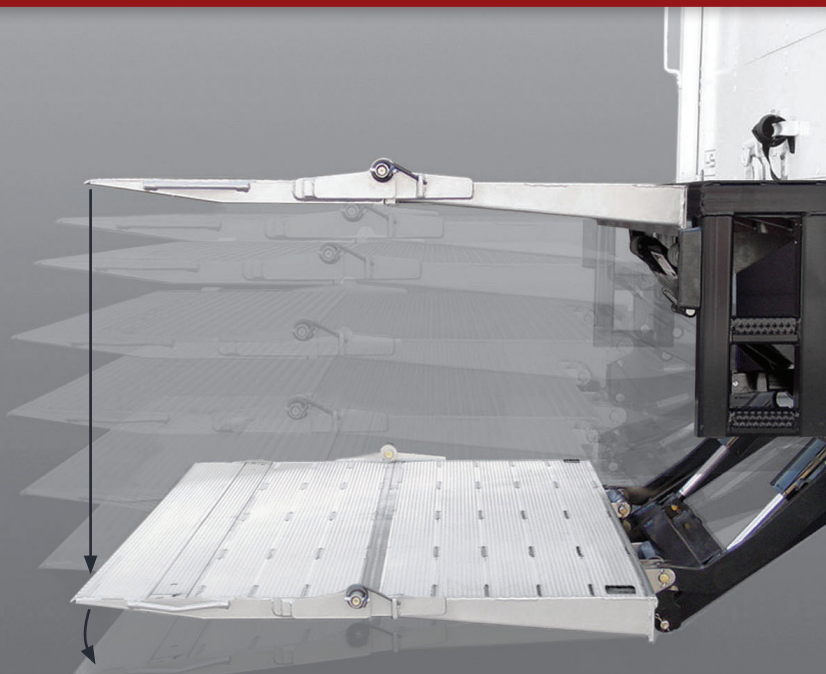

QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- **Spring Assist Platform**
Dual torsion springs provide effortless platform operation.
- **Ground Contact Rollers**
Rollers prevent scraping damage to liftgate and concrete or asphalt.
- **HD Mechanical Safety Latch**
Redundant-system stowage in addition to hydraulic lock.
- **Max Duty Dock Bumpers**
Helps protect floor extension from contact with dock. Includes rubber bumpers.
- **EZ Mount**
Ships factory assembled, filled, and tested with notched center mark for easy installation. Floor extension may be bolted to the truck.
- **Circuit Protection**
200 Amp fuse protects truck wiring from a "dead short".
- **CHS - Centralized Hydraulic System**
All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.
- **Marine Duty Potted Toggle Switch**
Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.
- **3/16" Steel Floor Extension**
Rugged and attractive surface.
- **Industry-Leading Warranty**
3 years mechanical + 3 years electrical & hydraulic, parts and labor.
- **Pressure Compensated Flow Valve**
Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Cab Cutoff Switch**
Prevents unauthorized liftgate operation.
- **Anthony 3-Step Powder Coat**
Steel components are washed, shot blast prepped, and coated with premium finish.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS AND CAPACITIES


Model	Capacity (lbs)	Bed Height Range
MTU-GLR-25	2500	47" - 57"
MTU-GLR-3	3000	47" - 57"
MTU-GLR-4	4000	47" - 57"
MTU-GLR-5	5000	47" - 57"
MTU-GLR-6	6000	47" - 57"
Available Platforms		
Steel Main/Aluminum Flip 80" x 60" Wedge		
All Aluminum 80" x 60" Wedge*		

*Not available on MTU-GLR-6.

OPTIONS

- Alternate floor extensions: 3/16", 1/4", or 3/8" steel. 96" or 102" Wide.
- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Stainless steel battery box
- Trail Charger, solar charging
- Third step add-on for dock bumper
- Galvanized finish with extended warranty
- ICC bumper - trailer certified
- Ignition cut-off switch
- Trailer sub-frame mounting kit
- Dual, foot-operated cart stops

TRUCK MOUNTING REQUIREMENTS

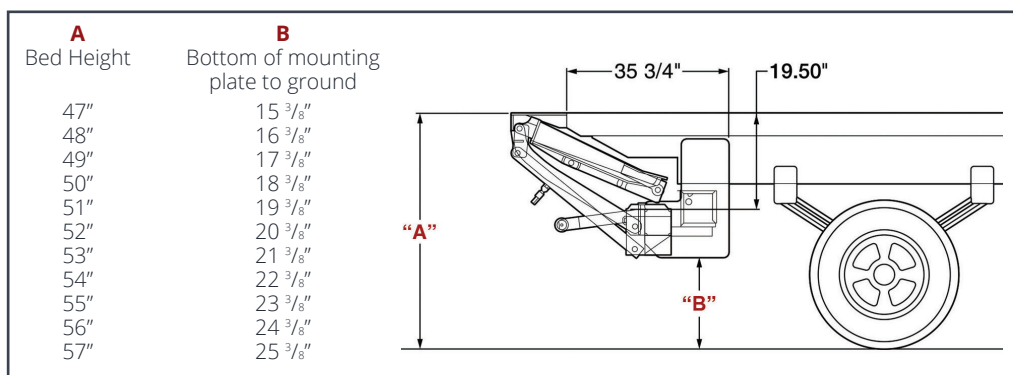

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383


Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com

ANTHONY
LIFTGATES, INC.®

DCT

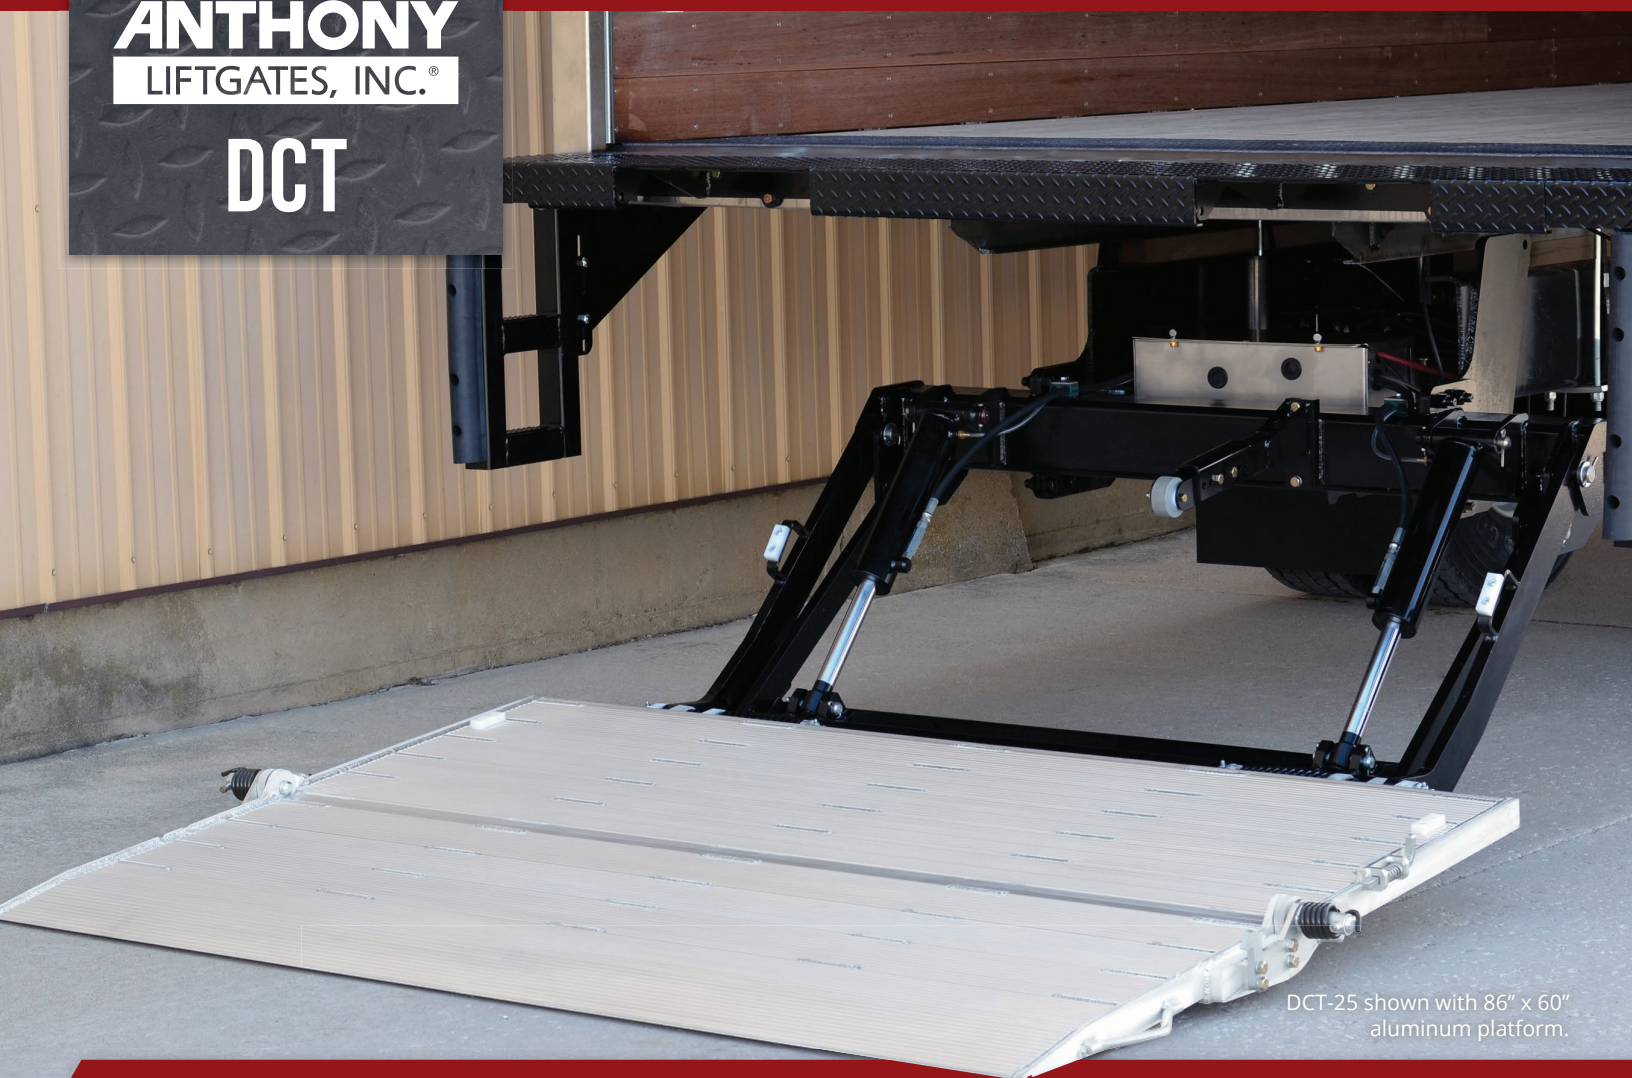

DCT-25 shown with 86" x 60" aluminum platform.

TUCKUNDER™ SERIES

LIFTING CAPACITIES (LBS): 2500, 3300

KEY ADVANTAGES

- 1. Large, Spring-Assist Wedge Platforms**
Plenty of working space, plus unique coil spring design provides effortless platform operation.
- 2. HD Mechanical Safety Latch**
Redundant-system stowage in addition to hydraulic lock.
- 3. Twin Cylinder Drive**
Powerful lift with low pressure helps to extend hydraulic component life.
- 4. EZ Mount**
Ships factory assembled, filled, and tested.
Bolt-on ready.
- 5. Grease Free**
Service free bushings, used at all critical pivot points, reduce wear and never require lubrication.



QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- CHS - Centralized Hydraulic System

All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.

- Max Duty Dock Bumpers

Helps protect floor extension from contact with dock. Includes bumper pads.

- Marine Duty Potted Toggle Switch

Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.

- Circuit Protection

Power cable with 200 Amp fuse protects truck wiring from a "dead short".

- Anthony Premium Polymer Finish

Steel components are washed, shot blast prepped, and coated with premium finish.

- Pressure Compensated Flow Valve

Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.

- Industry-Leading Warranty

2 years mechanical + 2 years electrical & hydraulic, parts and labor.

QUALITY COMES STANDARD


AVAILABLE MODELS, PLATFORMS AND CAPACITIES

Model	DCT-25	DCT-33
Capacity (lbs)	2500	3300
Bed Height - 50" platform	42" - 57"	
Bed Height - 60" platform	47" - 57"	
Available Platforms		
86" x 50" Steel Wedge		
86" x 50" Aluminum Wedge		
86" x 60" Aluminum Wedge		

OPTIONS

- Cart stops
- Galvanized finish with extended warranty
- Power down
- Alternate floor extensions: Standard or heavy duty, 96" or 102" Wide.
- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Alternative dock bumpers & steps
- Cab or ignition cutoff switch
- 2" receiver
- Auxiliary power & charge systems
- ICC Bumper

TRUCK MOUNTING REQUIREMENTS

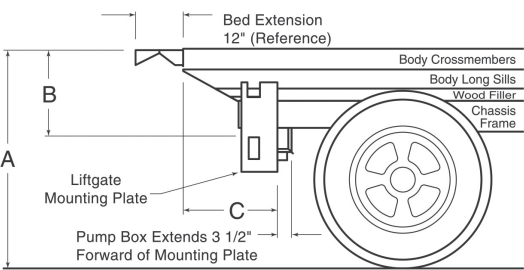A	B	C	
Bed Height	Bed to Top of Tube Assembly	Mounting Plate	
42"- 49"	19"	24 1/4"	 <p>Bed Extension 12" (Reference)</p> <p>Body Crossmembers</p> <p>Body Long Sills</p> <p>Wood Filler</p> <p>Chassis Frame</p> <p>Liftgate Mounting Plate</p> <p>Pump Box Extends 3 1/2" Forward of Mounting Plate</p>
50"- 51"	20"	23 3/4"	
52"- 53"	21"	23 1/4"	
54"- 55"	22"	22 5/8"	
56"- 57"	23"	22 1/3"	

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383


Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com

ANTHONY
LIFTGATES, INC.®

ATU-GLR

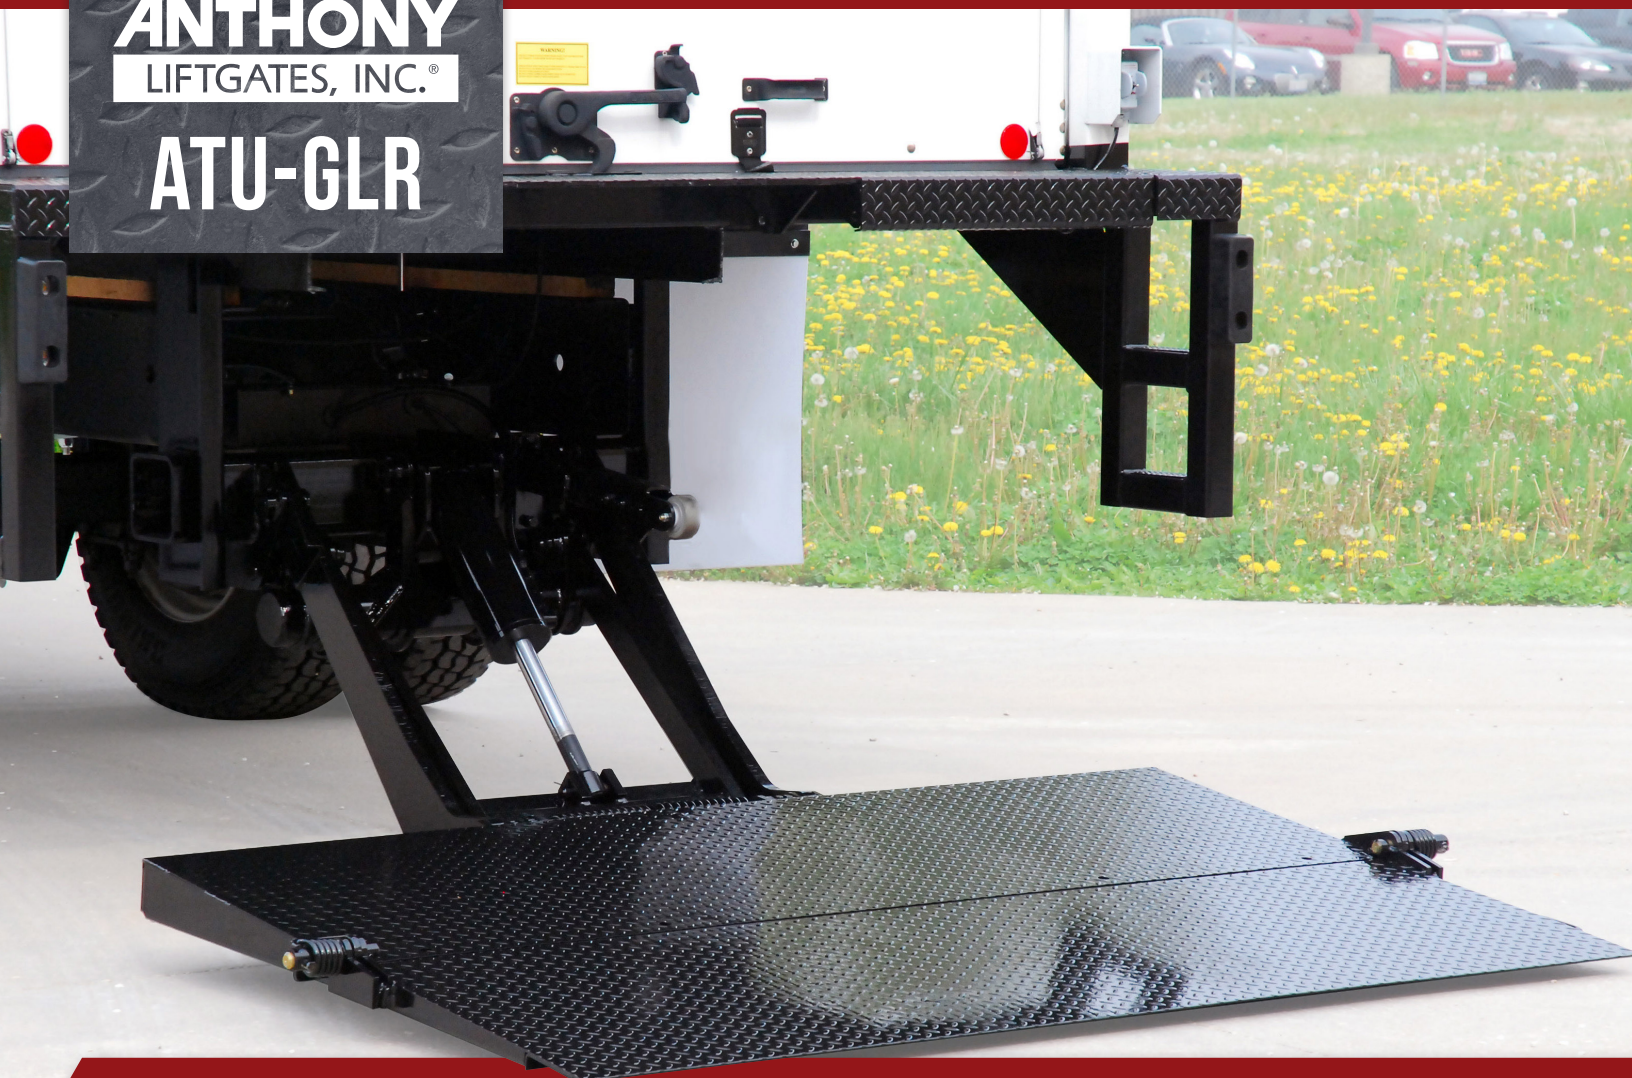

TUCKUNDER™ SERIES

LIFTING CAPACITIES (LBS): 2500, 3000



KEY ADVANTAGES

- 1. GLR - Gentle Level Ride**
Smooth, level up/down operation. Platform tilts gently at ground and re-levels before lifting cycle begins.
- 2. Spring Assist Wedge Platform**
Dual torsion springs provide effortless platform operation.
- 3. Lifetime Warrantied Service Free Bushings**
Used at all critical pivot points to reduce wear without the need for routine lubrication.
- 4. EZ Mount**
Ships factory assembled, filled, and tested with notched center mark for easy installation. Floor extension may be bolted to the truck.
- 5. CHS - Centralized Hydraulic System**
All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.

QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- **HD Mechanical Safety Latch**
Redundant-system stowage in addition to hydraulic lock.
- **Max Duty Dock Bumpers**
Helps protect floor extension from contact with dock.
Includes rubber bumpers.
- **Marine Duty Potted Toggle Switch**
Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.
- **Circuit Protection**
200 Amp fuse protects truck wiring from a "dead short".
- **3/16" Steel Floor Extension**
Rugged and attractive surface.
- **Industry-Leading Warranty**
3 years mechanical + 3 years electrical & hydraulic, parts and labor.
- **Pressure Compensated Flow Valve**
Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Anthony 3-Step Powder Coat**
Steel components are washed, shot blast prepped, and coated with premium finish.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS AND CAPACITIES


Model	ATU-GLR-2500	ATU-GLR-3000
Capacity (lbs)	2500	3000
Bed Height Range	42" - 55"	
Available Platforms		
Steel 80" x 50" Wedge (standard)*		
Aluminum 80" x 50" Wedge*		
Steel 80" x 48" + 12" Aluminum Retention Ramp		

*Cart stops available. 39" load area when deployed.

OPTIONS

- Cart stops
- Power down
- Alternate floor extensions: 3/16", 1/4", or 3/8" steel. 96" or 102" Wide.
- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Third step add-on for dock bumper
- Galvanized finish with extended warranty
- ICC Bumper
- Cab or ignition cutoff switch
- Battery Box

TRUCK MOUNTING REQUIREMENTS

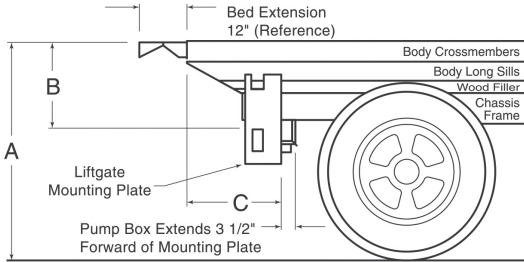A	B	C	
Bed Height	Bed to top of Tube Assembly	Mounting Plate	
42" - 49"	19"	24 1/4"	Bed Extension 12" (Reference) Body Crossmembers Body Long Sills Wood Filler Chassis Frame Liftgate Mounting Plate Pump Box Extends 3 1/2" Forward of Mounting Plate
50" - 51"	20"	23 3/4"	
52" - 53"	21"	23 1/4"	
54" - 55"	22"	22 5/8"	
56" - 57"	23"	22 1/2"	

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com

ANTHONY
LIFTGATES, INC.®

SM



TUCKUNDER™ SERIES

LIFTING CAPACITIES (LBS): 1800, 2500, 3000



KEY ADVANTAGES

- 1. HD Mechanical Safety Latch**
Redundant-system stowage in addition to hydraulic lock.
- 2. Spring Assist Platform**
Torsion spring provides effortless platform operation.
- 3. EZ Mount**
Ships factory assembled, filled, and tested.
- 4. CHS - Centralized Hydraulic System**
All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.
- 5. Lifetime-Warranty Service Free Bushings**
Used at all critical pivot points to reduce wear without the need for routine lubrication.

QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- **Circuit Protection**
200 Amp fuse protects truck wiring from a "dead short".
- **Marine Duty Potted Toggle Switch**
Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.
- **3/16" Steel Floor Extension**
Rugged and attractive surface.
- **Industry-Leading Warranty**
2 years mechanical + 2 years electrical & hydraulic, parts and labor.
- **Pressure Compensated Flow Valve**
Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Anthony 3-Step Powder Coat**
Steel components are washed, shot blast prepped, and coated with premium finish.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS, CAPACITIES


Model	SM-1800	SM-2500	SM-3000
Capacity (lbs)	1800	2500	3000
Bed Height Range	42" - 57"		
Available Platforms (Load Depth + Ramp)			
Steel 48" x 34" + 7" Ramped Steel 72" x 38" + 5" Ramped			

OPTIONS

- Power down
- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Galvanized finish with extended warranty
- Cab or ignition cutoff switch

SM MOUNTING REQUIREMENTS

Floor Ht.	A	B
42" - 49"	19"	29 5/8"
50" - 51"	20"	28 3/4"
52" - 53"	21"	28"
54"	22"	27"
Maximum stack height 21"		

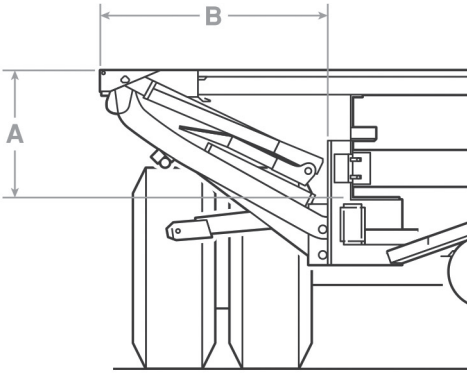

The diagram illustrates the mounting requirements for the SM liftgate on a truck chassis. Dimension A represents the vertical clearance from the floor to the top of the liftgate's pivot point. Dimension B represents the horizontal distance from the rear of the truck chassis to the pivot point. The liftgate is shown in its retracted position, with the platform extended.

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com

ANTHONY
LIFTGATES, INC.®

AST PLUS



*Shown with optional features.

TUCKUNDER™ SERIES

LIFTING CAPACITIES (LBS): 2500, 3000



KEY ADVANTAGES

- 1. HD Mechanical Safety Latch**
Redundant-system stowage in addition to hydraulic lock.
- 2. Spring Assist Platform**
Dual torsion springs provide effortless platform operation.
- 3. EZ Mount**
Ships factory assembled, filled, and tested with notched center mark for easy installation. Floor extension may be bolted to the truck.
- 4. CHS - Centralized Hydraulic System**
All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.
- 5. Lifetime-Warranty Service Free Bushings**
Used at all critical pivot points to reduce wear without the need for routine lubrication.

QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- **Circuit Protection**
200 Amp fuse protects truck wiring from a "dead short".
- **Marine Duty Potted Toggle Switch**
Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.
- **Industry-Leading Warranty**
2 years mechanical + 2 years electrical & hydraulic, parts and labor.
- **3/16" Steel Floor Extension**
Rugged and attractive surface.
- **Pressure Compensated Flow Valve**
Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Anthony 3-Step Powder Coat**
Steel components are washed, shot blast prepped, and coated with premium finish.
- **Max Duty Dock Bumpers**
Helps protect floor extension from contact with dock. Includes rubber bumpers.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS AND CAPACITIES


Model	Bed Height	Capacity (lbs)
AST-PLUS-2500	38" - 56"	2500
AST-PLUS-3000	38" - 56"	3000
Available Platforms		
Steel 80" x 50" Wedge (standard)		
Aluminum 80" x 50" Wedge		

OPTIONS

- Power down
- Alternate floor extensions: 3/16", 1/4", or 3/8" steel. 96" or 102" Wide.
- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Third step add-on for dock bumper
- Galvanized finish with extended warranty
- ICC Bumper
- Cab or ignition cutoff switch
- 5 & 12 ton pintle hook / ball hitch brackets
- Walkramp capability
- Battery Box

TRUCK MOUNTING REQUIREMENTS

A Bed Height	B Bed to top of Tube Assembly	C Mounting Plate
38" - 41"	15 3/4"	29"
42" - 49"	19"	24 1/4"
50" - 51"	20"	23 3/4"
52" - 53"	21"	23 1/4"
54" - 55"	22"	22 5/8"
56" - 57"	23"	22 1/2"

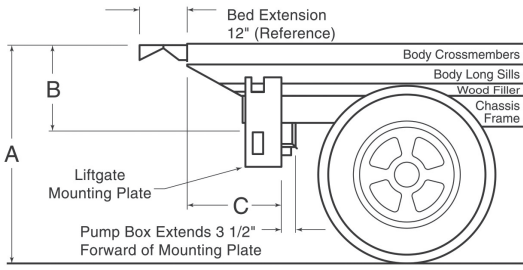

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com

ANTHONY
LIFTGATES, INC.®


AST



*Shown with optional features.

TUCKUNDER™ SERIES

LIFTING CAPACITIES (LBS):
1500, 2000, 2500, 3000

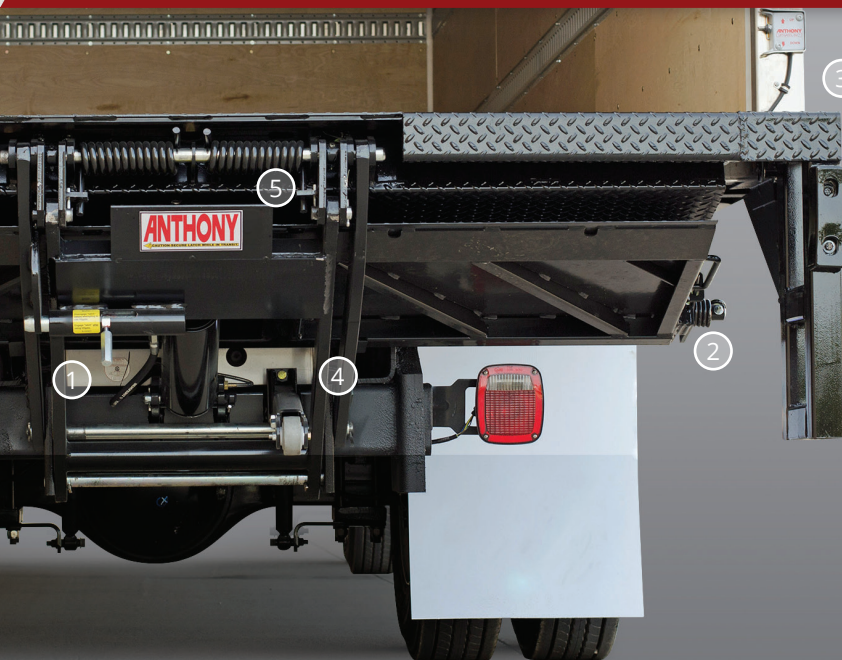

KEY ADVANTAGES

- 1. HD Mechanical Safety Latch**
Redundant-system stowage in addition to hydraulic lock.
- 2. Spring Assist Platform**
Dual torsion springs provide effortless platform operation.
- 3. EZ Mount**
Ships factory assembled, filled, and tested with notched center mark for easy installation. Floor extension may be bolted to the truck.
- 4. CHS - Centralized Hydraulic System**
All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.
- 5. Lifetime-Warranty Service Free Bushings**
Used at all critical pivot points to reduce wear without the need for routine lubrication.

QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- **Circuit Protection**
200 Amp fuse protects truck wiring from a "dead short".
- **Marine Duty Potted Toggle Switch**
Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.
- **3/16" Steel Floor Extension**
Rugged and attractive surface.
- **Industry-Leading Warranty**
2 years mechanical + 2 years electrical & hydraulic, parts and labor.
- **Pressure Compensated Flow Valve**
Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Anthony 3-Step Powder Coat**
Steel components are washed, shot blast prepped, and coated with premium finish.
- **Max Duty Dock Bumpers**
Helps protect floor extension from contact with dock. Includes rubber bumpers.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS AND CAPACITIES

Model	AST-1500	AST-2000	AST-2500	AST-3000	AST-3500
Capacity (lbs)	1500	2000	2500	3000	3500
Bed Height Range	42" - 57"				
Available Platforms					
Steel or Aluminum 80" x 38" + 5" Ramped					
Steel or Aluminum 80" x 45" + 6" Ramped					
Steel or Aluminum 80" x 50" Wedge*					
Steel or Aluminum 80" x 48" + 12" ARR					

Model	ASTL-1800	ASTL-2500
Capacity (lbs)	1800	2500
Bed Height Range	36" - 44"	
Available Platforms		
Steel 80" x 44" Wedge (standard)		
Aluminum 80" x 44" Wedge		

*Cart stops available. 39" load area when deployed.

OPTIONS

- Cart stops
- Power down
- Alternate floor extensions: 3/16", 1/4", or 3/8" steel. 96" or 102" Wide
- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Third step add-on for dock bumper
- Galvanized finish with extended warranty
- ICC bumper
- Cab or ignition cutoff switch
- 5 & 12 ton pintle hook / ball hitch brackets
- Walkramp capability
- Battery box

TRUCK MOUNTING REQUIREMENTS

A	B	C	
Bed Height	Bed to Top of Tube Assembly	Mounting Plate	
36"- 41"	15 3/4"	29"	
42"- 49"	19"	24 1/4"	
50"- 51"	20"	23 3/4"	
52"- 53"	21"	23 1/4"	
54"- 55"	22"	22 5/8"	
56"- 57"	23"	22 1/2"	

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com

ANTHONY
LIFTGATES, INC.®

ETU




TUCKUNDER™ SERIES

LIFTING CAPACITIES (LBS):
2000, 2500

KEY ADVANTAGES

- 1. Grease Free Operation**
Advanced long-life bushings eliminate the need for routine lubrication.
- 2. Large Platform Load Area**
Best-in-class platform size provides plenty of cargo space.
- 3. Dual Spring Assist**
Platform main and flip are spring assisted for easy operation.
- 4. CHS - Centralized Hydraulic System**
Sensitive hydraulic and electrical components housed safely within the galvanized steel pump box.
- 5. EZ Mount Installation**
Shipped assembled for easy installation.

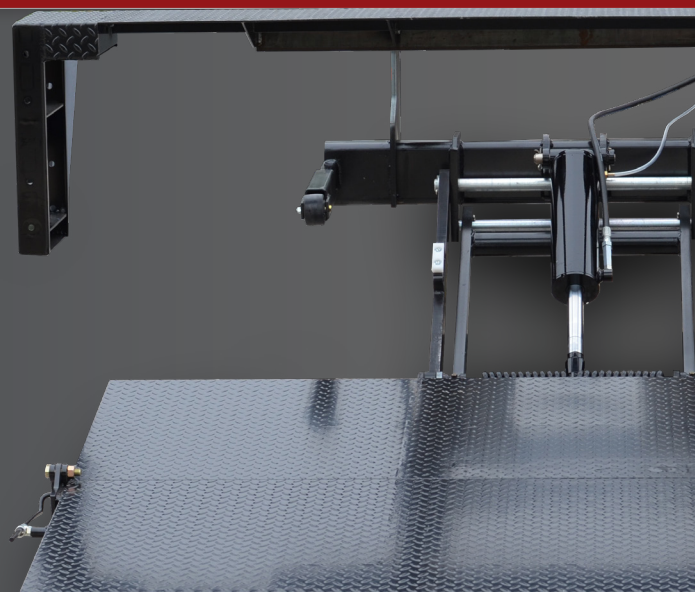

QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- Pressure Compensated Flow Valve

Constant, controlled speeds at all times.
Prevents "free-fall" under certain hydraulic failures.

- Anthony Premium Polymer Finish

Steel components are washed, shot blast prepped, and coated with premium finish.

- Factory Filled Power Pack

Factory tested and filled with low pour hydraulic fluid.

- Circuit Protection

Inline fuse protects power supply from a "dead short".

- Weatherproof Potted Control

Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.

- Dock Bumpers Steps

Assist installers in meeting ingress- egress requirements.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS AND CAPACITIES

Model	ETU-20-44	ETU-25-50
Capacity (lbs)	2000	2500
Bed Height	36" - 44"	38" - 56"
Platform	80" x 44 Wedge	80" x 50" Wedge


- Bed height is min. laden, max. unladen

OPTIONS

- 96" or 102" wide floor extension
- Dock bumper pad kit
- Secondary control options
- Cab or ignition cutoff switch
- ICC Bumper Kit

TRUCK MOUNTING REQUIREMENTS

A Bed Height	B Bed to Top of Tube Assembly	C Mounting Plate
36" - 41"	15 3/4"	29"
42" - 49"	19"	24 1/4"
50" - 51"	20"	23 3/4"
52" - 53"	21"	23 1/4"
54" - 55"	22"	22 5/8"
56" - 57"	23"	22 1/2"

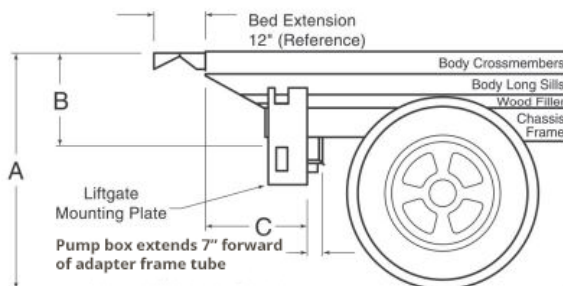

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com

FREIGHT NOT
INCLUDED IN
PRICE OF UNIT.
FREIGHT WILL
BE BILLED UPON
PURCHASE.