



mpower® Fascia Lights

STUD AND QUICK MOUNTS

Three, Four and Four x Two Inch



Stud Mounts

Three Inch

| | |
|------------------------------|----------------|
| 4 LED, Single Color | EMPS1SLS1(x) |
| 8 LED, Single or Dual Colors | EMPS1SLS3(x) |
| 12 LED, Tricolor | EMPS1SLS4(xxx) |

Three Inch Ford Grille Mount Application

| | |
|------------------------------|----------------|
| 4 LED, Single Color | EMPS1STS1(x) |
| 8 LED, Single or Dual Colors | EMPS1STS3(x) |
| 12 LED, Tricolor | EMPS1STS4(xxx) |

Four Inch

| | |
|---------------------|----------------|
| 6 LED, Single Color | EMPS2STS2(x) |
| 8 LED, Single Color | EMPS2STS3(x) |
| 12 LED, Dual Color | EMPS2STS4(x) |
| 18 LED, Tricolor | EMPS2STS5(xxx) |

Spot

| | |
|---------------------|--------------|
| 6 LED, Single Color | EMPS202KG(x) |
|---------------------|--------------|

Flood

| | |
|-------------------|-------------|
| 6 LED, White LEDs | EMPS202KR-W |
|-------------------|-------------|

Four x Two Inch

| | |
|----------------------------------|---------------|
| 12 LED, Single Color | EMPSA05C0-(x) |
| 16 LED, Single Color | EMPSA05C1-(x) |
| 24 LED, Dual Color | EMPSA05C2-(x) |
| 36 LED, Tricolor, Red/Blue/White | EMPSA05C3-6 |
| 36 LED, Tricolor Red/Blue/White | EMPSA05C3-8 |

Quick Mounts

Three Inch

| | |
|------------------------------|----------------|
| 4 LED, Single Color | EMPS1QMS1(x) |
| 8 LED, Single or Dual Colors | EMPS1QMS3(x) |
| 12 LED, Tricolor | EMPS1QMS4(xxx) |

Four Inch

| | |
|---------------------|----------------|
| 6 LED, Single Color | EMPS2QMS2(x) |
| 8 LED, Single Color | EMPS2QMS3(x) |
| 12 LED, Dual Color | EMPS2QMS4(x) |
| 18 LED, Tricolor | EMPS2QMS5(xxx) |

Spot

| | |
|---------------------|--------------|
| 6 LED, Single Color | EMPS202KE(x) |
|---------------------|--------------|

Flood




| | |
|-------------------|----------------|
| 6 LED, White LEDs | EMPS202KE(x)-W |
|-------------------|----------------|

Four x Two Inch

| | |
|----------------------------------|---------------|
| 12 LED, Single Color | EMPSA05BN-(x) |
| 16 LED, Single Color | EMPSA05BS-(x) |
| 24 LED, Dual Color | EMPSA05BT-(x) |
| 36 LED, Tricolor, Red/Blue/White | EMPSA05BU-6 |
| 36 LED, Tricolor, Red/Blue/White | EMPSA05BU-8 |

SCREW MOUNTS

Three, Four and Four x Two Inch



Screw Mounts

Three Inch

| | |
|------------------------------|----------------|
| 4 LED, Single Color | EMPS1SMS1(x) |
| 8 LED, Single or Dual Colors | EMPS1SMS3(x) |
| 12 LED, Tricolor | EMPS1SMS4(xxx) |

Four Inch

| | |
|---------------------|----------------|
| 6 LED, Single Color | EMPS2SMS2(x) |
| 8 LED, Single Color | EMPS2SMS3(x) |
| 12 LED, Dual Color | EMPS2SMS4(x) |
| 18 LED, Tricolor | EMPS2SMS5(xxx) |

Spot

| | |
|---------------------|--------------|
| 6 LED, Single Color | EMPS202KF(x) |
|---------------------|--------------|

Flood

| | |
|-------------------|-------------|
| 6 LED, White LEDs | EMPS202KQ-W |
|-------------------|-------------|

Four x Two Inch

| | |
|----------------------------------|---------------|
| 12 LED, Single Color | EMPSA05BW-(x) |
| 16 LED, Single Color | EMPSA05BX-(x) |
| 24 LED, Dual Color | EMPSA05BY-(x) |
| 36 LED, Tricolor, Red/Blue/White | EMPSA05BZ-6 |
| 36 LED, Tricolor, Red/Blue/White | EMPSA05BZ-8 |

mpower® Fascia Lights and HD Light



Four Inch

| | |
|---------------------|----------------|
| 6 LED, Single Color | EMPS4STS2(x) |
| 8 LED, Single Color | EMPS4STS3(x) |
| 12 LED, Dual Color | EMPS4STS4(x) |
| 18 LED, Tricolor | EMPS4STS5(xxx) |

Fascia Lights and HD Light: Replace (x) or (xxx) in the Order Number for Standard Color Selection

| | |
|-----------------------------|-------------------------------------------|
| 4, 6 or 8 LED Single Colors | A = ● B = ● R = ● W = ○ |
| 12 or 16 LED Single Colors | A = ● B = ● R = ● |
| 8 or 12 LED Dual Colors | D = ●○ E = ●○ F = ●○ J = ●● |
| 24 LED Dual Colors | D = ●○ E = ●○ F = ●○ J = ●● K = ●● M = ●● |
| 12 or 18 LED Tricolors | RBA = ●●● RBW = ●●○ |

● ● ● ● ○ To order configured products, contact your sales representative or customer service department.

Features

- Single, dual or tricolor capabilities
- Silicone molded one-piece housing and optic design delivers advantages over conventional polycarbonate lenses
 - A smaller footprint with maximized candela output
 - Greater resistance to gravel pitting, scratching or cracking
 - Improved sealing to prevent water from entering light
 - Higher UV and thermal stability to prevent lens from yellowing over time
- Compatible with the ConfigureIT system for easy light programming (does not include spot and flood lights)
- Steady-burn with dim function (spot and flood lights only)

| | | | | |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-----------------------|-------------------------------------|
| INPUT VOLTAGE RANGE | 9-32 Vdc | | | |
| CURRENT DRAW | <1.0 Amp @ 12.8 Vdc, <0.5 Amp @ 25.6 Vdc | | | |
| LIGHT SYNC | 24 single sync 2 lighthead | | | |
| FLASH PATTERNS | 12 Single, 14 Dual or 14 Tricolor patterns (does not include spot and flood lights) | | | |
| OPERATING TEMPERATURE | -40° C to +65° C | | | |
| DIMENSIONS | 3 Inch Stud | 4 Inch Stud | 4x2 Inch Stud | HD |
| Length | 3.04" (7.72 cm) | 4.04" (10.3 cm) | 4.07" (10.34 cm) | 4.25" (10.8 cm) |
| Height | 0.92" (2.3 cm) | 0.92" (2.3 cm) | 1.5" (3.8 cm) | 0.92" (2.3 cm) |
| Depth | 0.42" (1 cm) (from mounting surface) | 0.42" (1 cm) (from mounting surface) | .43" (1.09 cm) | 6" (1.5 cm) (from mounting surface) |
| | 3 Inch Quick | 4 Inch Quick | 4x2 Inch Quick | |
| Length | 3.04" (7.72 cm) | 4.04" (10.3 cm) | 4.07" (10.34 cm) | |
| Height | 0.92" (2.3 cm) | 0.92" (2.3 cm) | 1.5" (3.8 cm) | |
| Depth | 0.47" (1.2 cm) (from mounting surface) | 0.47" (1.2 cm) (from mounting surface) | .47" (1.2 cm) | |
| | 3 Inch Screw | 4 Inch Screw | 4x2 Inch Screw | |
| Length | 3.52" (8.94 cm) | 4.52" (11.4 cm) | 4.53" (11.51 cm) | |
| Height | 0.92" (2.3 cm) | 0.92" (2.3 cm) | 1.5" (3.8 cm) | |
| Depth | 0.42" (1 cm) (from mounting surface) | 0.42" (1 cm) (from mounting surface) | .43" (1.09 cm) | |
| CERTIFICATIONS | SAE J595 and J845 Class 1 certified CA Title 13, Article 22 compliant EMC R10.05 (HD light only) ECE R65, R10.05 certified (4x2 light only) | | | |
| WARRANTY | Five-year | | | |

UNIVERSAL ACCESSORIES Lights sold separately. Refer to pages 45, 46 and 47 for vehicle specific accessories.

| | | |
|-----------------------------|------------------------------------------------------|--------------|
| FASCIA MOUNT OPTIONS | Quick Clip Mount: Quick Clip Bracket | |
| | Three inch, black | PMP1BKQCLP |
| | Four inch, black | PMP2BKQCLP |
| | Stud Mount: 90 Degree Adjustable Bracket | |
| | Three inch, black | PMP1BKDGAJ |
| | Three inch, white | PMP1BKDGAJ-W |
| | Four inch, black | PMP2BKDGAJ |
| | Four inch, white | PMP2BKDGAJ-W |
| | Four x Two inch | PMPSABKDGAJ |
| | Stud Mount: 90 Degree Adjustable Edge Bracket | |
| | Three inch, black | PMP1BKEDGE |
| | Three inch, white | PMP1BKEDGE-W |
| | Four inch, black | PMP2BKEDGE |
| | Four inch, white | PMP2BKEDGE-W |
| BRACKETS | License Plate, Stud Mount | |
| | Three inch, vertical mount | PMP1BRK2LPV |
| | Four inch, vertical mount | PMP2BRK2LPV |
| | Metal | |
| | Four x Two inch, 90 degree | PMPADGSB |
| | Adjustable, Stud Mount | |
| | Four x Two inch, 90 degree | PMPSABKDGAJ |
| FRAMES | License Plate | |
| | Four inch, quick mount light | PMP2BRK2LPF |
| WEDGES | Quick Mounts | |
| | Three inch, black, 5 degree | PMP1WDG05B |
| | Three inch, black, 15 degree | PMP1WDG15B |
| | Three inch, black, 35 degree | PMP1WDG35B |
| | Three inch, white, 5 degree | PMP1WDG05W |
| | Three inch, white, 15 degree | PMP1WDG15W |
| | Three inch, white, 35 degree | PMP1WDG35W |
| | Four inch, black, 5 degree | PMP2WDG05B |
| | Four inch, black, 15 degree | PMP2WDG15B |
| | Four inch, black 35 degree | PMP2WDG35B |
| | Four inch, white, 5 degree | PMP2WDG05W |
| | Four inch, white, 15 degree | PMP2WDG15W |
| | Four inch, white, 35 degree | PMP2WDG35W |
| | Four x Two inch, black, 5 degree | PMP8WDGB01 |
| | Four x Two inch, black, 15 degree | PMP8WDGB02 |
| | Four x Two inch, black, 35 degree | PMP8WDGB03 |
| | Includes wedge and 3M VHB adhesive | |
| ROCK MOUNT | Four inch, stud mount and HD | PMP4BKRKLB |
| WINDSHIELD SHROUDS | Adjustable 25 to 90 Degrees | |
| | Three inch, single, black | PMP1WSSSB |
| | Three inch, single, white | PMP1WSSSW |
| | Four inch, single, black | PMP2WSSSB |
| | Four inch, single, white | PMP2WSSSW |
| | Three inch, dual, black | PMP1WSddb |
| | Three inch, dual, white | PMP1WSDDW |
| | Four inch, dual, black | PMP2WSddb |
| | Four inch, dual, white | PMP2WSDDW |
| | Narrow | |
| | Three inch, black | PMP1WSS2B |




mpower Fascia Light Application Photos



PERIMETER LIGHTING

mpower® 6 x 4 Inch Silicone Lights

WARNING, BACKUP, STOP/TAIL AND TURN Stud, Quick and Screw Mounts



Warning



Backup



Stop/Tail and Turn

Mounting Options



Stud Mount



Quick Mount



Screw Mount

Stud Mounts

Warning

12 LED, Single Color **EMPSB0C9D-x**

Backup

18 LED, Single Color, White **EMPSB0C9H-W**

Backup with Warning, White Backup Operation

28 LED, Amber Warning **EMPSB0C9J-F**

28 LED, Blue Warning **EMPSB0C9J-E**

28 LED, Red Warning **EMPSB0C9J-D**

Stop/Tail

20 LED, Single Color, Red **EMPSB0C6Y-R**

Turn

20 LED, Single Color, Amber **EMPSB0C9K-A**

Quick Mounts

Warning

12 LED, Single Color **EMPSB0C91-x**

Backup

18 LED, Single Color, White **EMPSB0C92-W**

Backup with Warning, White Backup Operation

28 LED, Amber Warning **EMPSB0AWT-F**

28 LED, Blue Warning **EMPSB0AWT-E**

28 LED, Red Warning **EMPSB0AWT-D**

Stop/Tail

20 LED, Single Color, Red **EMPSB0C9B-R**

Turn

20 LED, Single Color, Amber **EMPSB0C9C-A**

Screw Mounts

Warning

12 LED, Single Color **EMPSB0C96-x**

Backup

18 LED, Single Color, White **EMPSB0C9A-W**

Backup with Warning, White Backup Operation

28 LED, Amber Warning **EMPSB0AWT-F**

28 LED, Blue Warning **EMPSB0AWT-E**

28 LED, Red Warning **EMPSB0AWT-D**

Stop/Tail

20 LED, Single Color, Red **EMPSB0C9B-R**

Turn

20 LED, Single Color, Amber **EMPSB0C9C-A**

Replace (x) in the Order Number for Standard Color Selection

12 LED Single Colors A = ● B = ● R = ● W = ○

● ● ● ● ○ To order configured products, contact your sales representative or customer service department.

mpower 6 x 4 Inch Silicone Lights

Features

- Powerful lighting output at 180 degree viewing angles perfect for fire and EMS apparatuses
- Extremely functional and customizable for use as stop/tail, turn, reverse, scene or warning light
- Rugged weather-resistant IP67 enclosure
- Five-wire nano connector with 18 inch flying leads
- Durable clear silicone lens
- Industry standard bolt pattern location
- Sync 2 compatible, with other sync 2 products (warning and reverse with warning lights only)
- bluePRINT compatible, runs in slave mode

| | |
|---------------------|------------------------------------------------------------------------------------------------------------------------------|
| AVAILABLE COLORS | All standard single, red stop/tail; amber turn; white reverse or white reverse with amber, blue, green, red or white warning |
| INPUT VOLTAGE RANGE | 9-32 Vdc |
| FLASH PATTERNS | Single 12; 3 sequential turn patterns, plus steady burn on turn and 1 flicker stop on stop/tail |
| DIMENSIONS | |
| Length | 6.37" (16.17 cm) |
| Height | 4" (10.16 cm) |
| Depth | 1.01" (2.56 cm) |
| CERTIFICATIONS | SAE J595 Class 1 certified CA Title 13 certified NFPA, KKK-1822-F FMVSS-108 (backup, stop/tail and turn) |
| MOUNTING | Stud, quick or screw mounts |
| WARRANTY | Five-year warranty |

UNIVERSAL ACCESSORIES

Lights sold separately.


| | | |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| HARDWARE KITS | Stud mount Quick mount Screw mount Screw mount, triple and quad | PMP8HK01-ST PMP7HK01-QM PMP8HK01-SM PMP8HK01-BZ |
| BEZELS | Screw and stud mounts, single, black (includes gasket) Screw and stud mounts, single, chrome (includes gasket) Screw mount, triple, chrome Screw mount, quad, chrome | PMP7BZL01B PMP7BZL01C PMP7BZL03C PMP7BZL04C |

Coming Soon!

6x4 Inch Silicone Lights in Dual and Tricolor!

Contact your sales representative regarding product availability.


Polycarb Lights



Warning



Reverse with Single Warning



Stop/Tail/Turn

Coming Soon!

Fire/EMS Polycarb 6x4, 7x3 and 9x6 Inch Stud, Quick and Screw Mount Lights!

Contact your sales representative regarding product availability.

mpower® ORV Lights



2x1 Inch

Silicone, White LEDs

EMPR10004-WW



6x1 Inch

Silicone, White LEDs

EMPR20013-W



2x1 Inch Dual Stacked Kit

Silicone, White LEDs

EMPR10037-WW

Includes four 2x1 lights and 2 u-shaped brackets (shown)

Side and Rear View
6x1 Inch



For mpower Fascia Spot and Flood light product information, refer to page 25.

Features

- Incredible optic pull; spot performs stronger than competition at both spot and flood distances
- A smaller footprint with maximized candela output
- Greater resistance to gravel pitting, scratching or cracking
- Improved sealing to prevent water from entering light
- Higher UV and thermal stability to prevent lens from yellowing over time
- Won't crack in harsh environments

| | 2x1 Inch | 6x1 Inch | 2x1 Inch Dual Stack |
|----------------------------|---------------------------|-------------------|---------------------|
| RAW LUMENS | 1,382 | 4,147 | 2,764 |
| LUX @ 10m | 218.2 | 619.7 | 398.8 |
| BEAM DISTANCE (m) @ 1 LUX | 148 | 249 | 200 |
| BEAM DISTANCE (m) @ 25 LUX | 295 | 498 | 399 |
| PEAK BEAM INTENSITY (cd) | 21,819 | 61,974 | 39,880 |
| AMP DRAW @ 14 V | 1.15 | 3.75 | 2.3 |
| WATTAGE | 16 Watts | 52.5 Watts | 32 Watts |
| LED COUNT | 2 LEDs | 6 LEDs | 4 LEDs |
| DIMENSIONS | | | |
| Length | 3.61" (9.17 cm) | 7.64" (19.406 cm) | 3.61" (9.17 cm) |
| Height | 1.2" (3.05 cm) | 1.2" (3.05 cm) | 2.4" (6.10 cm) |
| Depth | 3.23" (8.2 cm) | 3.48" (8.84 cm) | 3.23" (8.2 cm) |
| INPUT VOLTAGE | 9-32 Vdc | | |
| OPERATING TEMPERATURE | -40° C to +65° C | | |
| WARRANTY | Limited Lifetime Warranty | | |

mpower ORV Lights

UNIVERSAL ACCESSORIES

Lights sold separately.

| | | |
|-------------|--------------------------|------------|
| KITS | Brackets | |
| | 2x1 | PMPR1BK001 |
| | 6x1 | PMPR2BK001 |
| <hr/> | | |
| | Hardware | |
| | 2x1 and 6x1 Dual Stacked | PMPR1HW002 |
| <hr/> | | |
| | Harness | |
| | 2x1 | PMPR1HN001 |
| | 6X1 | PMPR2HN002 |
| <hr/> | | |
| | Mounting | |
| | 2x1 and 6x1 | PMPR1HW001 |
| <hr/> | | |

mpower[®] Mini Bar

Coming Soon!



Features

- High power white illumination lighting for a variety of applications
- Impact and scratch resistant mpower silicone lens/optic
- Six LED High Power modules
- Ten degree spot/flood hybrid lens
- Available in 3 lengths: 12, 18 and 24 inches
- Includes 90 degree mounting bracket

CERTIFICATIONS


IP67 and SAE J575

Contact your sales representative for availability of this product.

mpower® 7x3 Inch Silicone Lights

WARNING, BACKUP, STOP/TAIL AND TURN

Stud, Quick and Screw Mounts

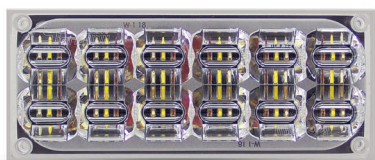

Warning



Backup



Stop/Tail and Turn


Mounting Options



Stud Mount



Quick Mount



Screw Mount

Stud Mounts

Warning

| | |
|----------------------------------|---------------|
| 12 LED, Single Color | EMPSC07MH-(x) |
| 24 LED, Dual Color | EMPSC07MJ-(x) |
| 24 LED, Split Color | EMPSC07MK-(x) |
| 36 LED, Tricolor, Red/Blue/Amber | EMPSC07ML-6 |
| 36 LED, Tricolor, Red/Blue/White | EMPSC07ML-8 |

Backup

| | |
|-----------------------------|-------------|
| 18 LED, Single Color, White | EMPSC07MM-W |
|-----------------------------|-------------|

Backup with Warning

| | |
|--------------------------------------------------|-------------|
| 28 LED, Amber Warning and White Backup Operation | EMPSC07MN-F |
| 28 LED, Blue Warning and White Backup Operation | EMPSC07MN-E |
| 28 LED, Red Warning and White Backup Operation | EMPSC07MN-D |

Stop/Tail

| | |
|---------------------------|-------------|
| 18 LED, Single Color, Red | EMPSC07MP-R |
|---------------------------|-------------|

Turn

| | |
|-----------------------------|-------------|
| 18 LED, Single Color, Amber | EMPSC07MQ-A |
|-----------------------------|-------------|

Quick Mounts

Warning

| | |
|----------------------------------|---------------|
| 12 LED, Single Color | EMPSC07M0-(x) |
| 24 LED, Dual Color | EMPSC07M1-(x) |
| 24 LED, Split Color | EMPSC07M2-(x) |
| 36 LED, Tricolor, Red/Blue/White | EMPSC07M3-6 |
| 36 LED, Tricolor, Red/Blue/Amber | EMPSC07M3-8 |

Backup

| | |
|-----------------------------|------------|
| 18 LED, Single Color, White | MPSC07M4-W |
|-----------------------------|------------|

Backup With Warning

| | |
|--------------------------------------------------|-------------|
| 28 LED, Amber Warning and White Backup Operation | EMPSC07M5-F |
| 28 LED, Blue Warning and White Backup Operation | EMPSC07M5-E |
| 28 LED, Red Warning and White Backup Operation | EMPSC07M5-D |

Stop/Tail

| | |
|---------------------------|-------------|
| 18 LED, Single Color, Red | EMPSC07M6-R |
|---------------------------|-------------|

Turn

| | |
|-----------------------------|-------------|
| 18 LED, Single Color, Amber | EMPSC07M7-A |
|-----------------------------|-------------|

Screw Mounts

Warning

| | |
|----------------------------------|---------------|
| 12 LED, Single Color | EMPSC07M8-(x) |
| 24 LED, Dual Color | EMPSC07M9-(x) |
| 24 LED, Split Color | EMPSC07MA-(x) |
| 36 LED, Tricolor, Red/Blue/Amber | EMPSC07MB-6 |
| 36 LED, Tricolor, Red/Blue/White | EMPSC07MB-8 |

Backup

| | |
|-----------------------------|-------------|
| 18 LED, Single Color, White | EMPSC07MC-W |
|-----------------------------|-------------|

Backup With Warning

| | |
|---------------------------------------------------|-------------|
| 28 LED, Amber Warning with White Backup Operation | EMPSC07MD-F |
| 28 LED, Blue Warning with White Backup Operation | EMPSC07MD-E |
| 28 LED, Red Warning with White Backup Operation | EMPSC07MD-D |

Stop/Tail

| | |
|---------------------------|-------------|
| 18 LED, Single Color, Red | EMPSC07ME-R |
|---------------------------|-------------|

Turn

| | |
|-----------------------------|-------------|
| 18 LED, Single Color, Amber | EMPSC07MF-A |
|-----------------------------|-------------|

mpower 7x3 Inch Silicone Lights

Replace (x) in the Order Number for Standard Color Selection

| | |
|----------------------|-------------------------------------------|
| 12 LED Single Colors | A = ● B = ● R = ● W = ○ |
| 24 LED Dual Colors | D = ●○ E = ●○ F = ●○ J = ●● |
| 24 LED Split Colors | D = ●○ E = ●○ F = ●○ J = ●● K = ●● M = ●● |

● ● ● ● ○ To order configured products, contact your sales representative or customer service department.

Features

- Powerful lighting output at 180 degree viewing angles perfect for fire and EMS apparatuses
- Extremely functional and customizable for use as stop/tail, turn, reverse, scene or warning light
- Rugged weather-resistant IP67 enclosure
- Five-wire nano connector with 18 inch flying leads
- Durable clear silicone lens
- Industry standard bolt pattern location
- Sync 2 compatible, with other sync 2 products (warning and reverse with warning lights only)
- bluePRINT compatible, runs in slave mode

NOTE: It is recommended to choose the stud mount option for any dynamic mount surface (swinging panels, doors and tailgates).

| | |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AVAILABLE COLORS | All standard single, dual or tricolors; split warning; red stop/tail; amber turn; white reverse or white reverse with amber, blue, green, red or white warning |
| INPUT VOLTAGE RANGE | 9-32 Vdc |
| FLASH PATTERNS | Single 12; dual and tricolor, 14; 3 sequential turn patterns, plus steady burn on turn and 1 flicker stop on stop/tail |
| DIMENSIONS | Length 7.18" (18.54 cm) Height 3" (7.62 cm) Depth 1" (2.54 cm) (without bezel) |
| CERTIFICATIONS | SAE J595 Class 1 certified; CA Title 13 certified; NFPA, KKK-1822-F and FMVSS-108 (backup, stop/tail and turn) |
| MOUNTING | Stud, quick or screw mounts |
| WARRANTY | Five-year warranty |

UNIVERSAL ACCESSORIES

Lights sold separately.

| | | |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| HARDWARE KITS | Stud mount Quick mount Screw mount Screw mount, triple and quad | PMP8HK01-ST PMP8HK01-QM PMP8HK01-SM PMP8HK01-BZ |
| BEZELS | Screw and stud mounts, single, black (includes gasket) Screw and stud mounts, single, chrome (includes gasket) Screw mount, triple, chrome Screw mount, quad, chrome | PMP8BZLO1B PMP8BZLO1C PMP8BZLO3C PMP8BZLO4C |


Polycarb Lights



Warning



Reverse with Single Warning



Stop/Tail/Turn

Coming Soon!

Fire/EMS Polycarb 6x4, 7x3 and 9x6 Inch Stud, Quick and Screw Mount Lights!
Contact your sales representative regarding product availability.

Surface, Deck/Grille and Recess Mounts

Surface Mounts



Single

| | |
|------------------------------------------|---------------|
| 6 LED, Single or Split Colors | ENFSSS1(x) |
| 9 LED, Single Color | ENFSSS2(x) |
| 9 LED, Single Color, Amber, High Output | ENFSSS2A-PC 9 |
| LED, Single Color, 10-30 Vdc, Xylex Lens | ENFSSE2(x) |
| 12 LED, Single or Dual Colors | ENFSSS3(x) |
| 18 LED, Tricolor | ENFSSS4(xxx) |



Dual Stacked

| | |
|-----------------------------------------------|--------------|
| 6 LED, Single or Split Colors | ENFDSS1(xx) |
| 9 LED, Single Color | ENFDSS2(xx) |
| 9 LED, Single Color, Amber/Amber, High Output | ENFDSS2AA-PC |
| 9 LED, Single Color, 10-30 Vdc, Xylex Lens | ENFDSE2(xx) |
| 12 LED, Single or Dual Colors | ENFDSS3(xx) |
| 18 LED, Tricolor | ENFDSS4(xxx) |

Deck/Grille Mounts



Single

| | |
|--------------------------------------------|--------------|
| 6 LED, Single or Split Colors | ENFSGS1(x) |
| 9 LED, Single Color | ENFSGS2(x) |
| 9 LED, Single Color, Amber, High Output | ENFSGS2A-PC |
| 9 LED, Single Color, 10-30 Vdc, Xylex Lens | ENFSGE2(x) |
| 12 LED, Single or Dual Colors | ENFSGS3(x) |
| 18 LED, Tricolor | ENFSGS4(xxx) |



Dual Side-by-Side

| | |
|-----------------------------------------------|--------------|
| 6 LED, Single or Split Colors | ENFDGS1(xx) |
| 9 LED, Single Color | ENFDGS2(xx) |
| 9 LED, Single Color, Amber/Amber, High Output | ENFDGS2AA-PC |
| 9 LED, Single Color, 10-30 Vdc, Xylex Lens | ENFDGS2AA-PC |
| 12 LED, Single or Dual Colors | ENFDGS3(xx) |
| 18 LED, Tricolor | ENFDGS4(xxx) |

Recess Mounts



Recess

| | |
|--------------------------------------------|--------------|
| 6 LED, Single or Split Colors | ENFSRS1(x) |
| 9 LED, Single Color | ENFSRS2(x) |
| 9 LED, Single Color, 10-30 Vdc, Xylex Lens | ENFSRE2(x) |
| 12 LED, Single or Dual Colors | ENFSRS3(x) |
| 18 LED, Tricolor | ENFSRS4(xxx) |



Six Inch Oval

| | |
|-----------------------------------------|-------------|
| 6 LED, Single or Split Colors | ENFSRV1(x) |
| 9 LED, Single Color | ENFSRV2(x) |
| 9 LED, Single Color, Amber, High Output | ENFSRV2A-PC |
| 12 LED, Single or Dual Colors | ENFSRV3(x) |

nFORCE Windshield Mounts

Windshield Mounts



Single, Stacked Mount

Includes shroud, bracket and bare wires

| | |
|-----------------------------------------|--------------|
| 6 LED, Single or Dual Colors | ENFSWP1(x) |
| 9 LED, Single Color | ENFSWP2(x) |
| 9 LED, Single Color, Amber, High Output | ENFSWP2A-PC |
| 12 LED, Single or Dual Colors | ENFSWP3(x) |
| 18 LED, Tricolor | ENFSWP4(xxx) |

Single, Suction Cup Mount

Includes shroud, bracket and 12 volt cig plug with 11.5' cord

| | |
|-----------------------------------------|--------------|
| 6 LED, Single or Split Colors | ENFSWS1(x) |
| 9 LED, Single Color | ENFSWS2(x) |
| 9 LED, Single Color, Amber, High Output | ENFSWS2A-PC |
| 12 LED, Single or Dual Colors | ENFSWS3(x) |
| 18 LED, Tricolor | ENFSWS4(xxx) |



Dual Side-by-Side, Permanent Mount

Includes shroud, bracket and bare wires

| | |
|-----------------------------------------------|--------------|
| 6 LED, Single or Dual Colors | ENFDWP1(xx) |
| 9 LED, Single Color | ENFDWP2(xx) |
| 9 LED, Single Color, Amber/Amber, High Output | ENFDWP2AA-PC |
| 12 LED, Single or Dual Colors | ENFDWP3(xx) |
| 18 LED, Tricolor | ENFDWP4(xxx) |

Dual Side-by-Side, Suction Cup Mount

Includes shroud, bracket and 12 volt cig plug with 11.5' cord

| | |
|-----------------------------------------------|--------------|
| 6 LED, Single or Dual Colors | ENFDWS1(xx) |
| 9 LED, Single Color | ENFDWS2(xx) |
| 9 LED, Single Color, Amber/Amber, High Output | ENDWS2AA-PC |
| 12 LED, Single or Dual Colors | ENDWS3(xx) |
| 18 LED, Tricolor | ENFDWS4(xxx) |

Replace (x), (xx) or (xxx) in the Order Number for Standard Color Selection

6, 9 or 12 LED Single Colors A = ● B = ● R = ● W = ○

Six Inch Oval Recess Mount A = ● W = ○

6 LED Split Color J = ●●

Six Inch Oval Recess Mount D = ●○ F = ●○

12 LED Dual Colors D = ●○ E = ●○ F = ●○ J = ●●

Six Inch Oval Recess Mount D = ●○ F = ●○

18 LED Tricolors BRA = ●●● BRW = ●●○

Six Inch Oval Recess Mount Not available

●●●○ To order configured products, contact your sales representative or customer service department.

Features

- Single, split, dual or tricolor capability (tricolor is not available for the six inch oval recess mount)
- 6, 9, 12 or 18 LED counts (18 LED count is not available for the six inch oval recess mount)
- Steady-burn white capability
- ECE R65 certified (surface, deck/grille and recess mounts only)
- Secondary function can be either flashig or steady-burn (six inch oval recess mount only)



Surface, Deck/Grille, Recess and Windshield Mounts

| | | | |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------|
| INPUT VOLTAGE RANGE | 10-16 Vdc standard or 10-30 Vdc (configurable option) | | |
| CURRENT DRAW PER MODULE | 10-16 VDC | 10-30 VDC (configurable option) | |
| 6 LED Single Color | <1.0 Amp @ 12.8 Vdc | <0.6 Amp @ 25.6 Vdc | |
| 6 LED Split Color | <1.0 Amp @ 12.8 Vdc | <0.6 Amp @ 25.6 Vdc | |
| 9 LED Single Color | <1.5 Amp @ 12.8 Vdc | <0.9 Amp @ 25.6 Vdc | |
| 12 LED Single Color | <2.0 Amp @ 12.8 Vdc | <1.2 Amp @ 25.6 Vdc | |
| 12 LED Dual Color | <1.0 Amp @ 12.8 Vdc | <0.6 Amp @ 25.6 Vdc | |
| 18 LED Tricolor | <1.0 Amp @ 12.8 Vdc | <0.6 Amp @ 25.6 Vdc (tricolor is not available for the six inch oval recess mount) | |
| LIGHT SYNC | 24 single sync 2 lightheads | | |
| FLASH PATTERNS | 12 single, 14 dual or 14 tricolor patterns (tricolor is not available for the six inch oval recess mount) | | |
| OPERATING TEMPERATURE | -40° C to +65° C / -40° F to +149° F | | |
| DIMENSIONS | | | |
| Surface Mount, Single | | Recess Mount | |
| Length | 5.0" (12.7 cm) | Length | 5.25" (13.34 cm) |
| Height | 1.72" (4.3 cm) | Height | 2.25" (5.72 cm) |
| Depth | 1.50" (3.8 cm) | Depth | 1.50" (3.8 cm) |
| Surface Mount, Dual Stacked | | Windshield Mount, Single | |
| Length | 5.0" (12.7 cm) | Length | 6.80" (17.27cm) |
| Height | 3.13" (7.9 cm) | Height | 1.43" (3.6 cm) |
| Depth | 1.5" (3.8 cm) | Depth | 1.43" (3.6 cm) |
| Deck/Grille Mount, Single | | Windshield Mount, Dual Side-by-Side | |
| Length | 5.0" (12.7 cm) | Length | 11.35" (28.8 cm) |
| Height | 1.88" (4.7 cm) | Height | 1.43" (3.6 cm) |
| Depth | 1.82 (4.3 cm) | Depth | 5" (12.7 cm) |
| Deck/Grille Mount, Dual Side-by-Side | | | |
| Length | 9.50" (24.1 cm) | | |
| Height | 1.88" (4.7 cm) | | |
| Depth | 1.82" (4.3 cm) | | |
| CERTIFICATIONS | SAE J595, Class 1 certified and CA Title 13, Article 22 compliant EMC 72/245/EEC certified and ECE R65 Category X, Class 2 certified (ECE R65 can only be specified with 9 LED single color) (surface, deck/grille and recess mounts only) | | |
| WINDSHIELD MOUNT | SAE J595, Class 1 certified (not amber) and CA Title 13, Article 22 compliant EMC 72/245/EEC certified | | |
| WARRANTY | Five-year | | |

UNIVERSAL ACCESSORIES

Lights sold separately. Refer to pages 45, 46 and 47 for vehicle specific accessories.

| | | |
|--------------------------|----------------------------------------------------|------------------------------|
| LICENSE PLATE | Surface horizontal mount Surface vertical mount | PNFSLBRK2LPH PNFSLBRK2LPV |
| 90 DEGREE ANGLE | Surface horizontal mount | PNFSLBRK190 |
| DECK/GRILLE MOUNT | Single Dual | PNFSLDGSB PNFSLDGDB |



intersec^{or} Under Mirror and Surface Mount Lights

Under Mirror Mount



| | |
|---------------------------------|--------------|
| 8 LED, Single Color | ENT2B3(x) |
| 8 LED, Single Color, Xylex Lens | ENT2B3(x)-EU |
| 16 LED, Dual Color | ENT2B3(y) |
| 16 LED, Dual Color, Xylex Lens | ENT2B3(y)-EU |
| 18 LED, Tricolor | ENT2B3(xxx) |

Surface Mount



| | |
|-------------------------------------|-------------|
| 8 LED, Single Color, Black Housing | ENT3B3(x) |
| 8 LED, Single Color, Chrome Housing | ENT3C3(x) |
| 8 LED, Single Color, White Housing | ENT3W3(x) |
| 16 LED, Dual Color, Black Housing | ENT3B3(y) |
| 16 LED, Dual Color, Chrome Housing | ENT3C3(y) |
| 16 LED, Dual Color, White Housing | ENT3W3(y) |
| 18 LED, Tricolor, Black Housing | ENT3B3(xxx) |
| 18 LED, Tricolor, Chrome Housing | ENT3C3(xxx) |
| 18 LED, Tricolor, White Housing | ENT3W3(xxx) |

Replace (x), (y) or (xxx) in the Order Number for Standard Color Selection

| | |
|-------------------------|--------------------------------------------------------------------------------------------------------|
| 8 LED Single Colors (x) | A = ● B = ● G = ● R = ● W = ○ |
| 16 LED Dual Colors (y) | D = ●○ E = ●○ F = ●○ J = ●● K = ●● L = ●● M = ●● N = ●● P = ●● |
| 18 LED Tricolors (xxx) | BAG = ●●● BAW = ●●○ BGW = ●●○ GAW = ●●○ RAG = ●●● RAW = ●●○ RBA = ●●● RBW = ●●○ RBG = ●●● RGW = ●●○ |

Features

Under Mirror Mount

- Light includes 0, 5, 10 and 15 degree mounting wedges and foam gasket
- The first light of its kind to offer critical intersection warning and side warning
- Light is based upon problem solving research - 30% of all emergency vehicle crashes are likely to occur at dangerous intersections
- Unique under-mirror mount simplifies installation - labor saving light is much easier to install than traditional front mirror skull mounts - no mirrors to work behind or around
- Light can be surface mounted to any flat area on any type of vehicle - elevate your safety and visibility by mounting to the headache rack or body of the vehicle wherever additional lighting is needed
- Features cruise mode for steady burn if desired
- Steady-burn white can be specified as a means of providing additional side/alley lighting

Features

Surface Mount

- No other light offers 180 degree output - specially designed reflector amplifies and throws the light at the perfect angle to increase visibility at intersections
- Includes surface mount light in your choice of LED and housing colors, neoprene gasket and mounting hardware for installation
- Patented design, the first light of its kind to offer critical intersection warning and side warning illumination now available with surface mount capabilities

UNIVERSAL ACCESSORIES

Lights sold separately. Refer to pages 45, 46 and 47 for vehicle specific accessories.

| | | |
|-------------------------|--------------------------------------------------|-----------|
| UNDER MIRROR | Installation Mount (includes bracket and screws) | PNT1WRRT |
| SURFACE ADAPTORS | Under Mirror, Curved (sold in pairs) | PNT1CRV01 |

Intersector Under Mirror and Surface Mount Lights

| | |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INPUT VOLTAGE | 9-32 Vdc |
| CURRENT DRAW | 8 LED Single Color, <1.3 Amp @ 12.8 Vdc, <0.65 Amp @ 25.6 Vdc 16 LED Dual Color, <1.3 Amp @ 12.8 Vdc, <0.65 Amp @ 25.6 Vdc 18 LED Tricolor, <1.0 Amp @ 12.8 Vdc, <0.5 Amp @ 25.6 Vdc |
| LIGHT SYNC | 24 single sync 2 lighthead |
| FLASH PATTERNS | 12 single, 14 dual or 14 tricolor |
| OPERATING TEMPERATURE | -40° C to +65° C / -40° F to +149° F |
| DIMENSIONS | |
| Length | 2.9" (7.4 cm) |
| Height | 1.9" (4.8 cm) |
| Depth | 2.9" (7.4 cm) |
| MOUNTING | Under mirror or surface mount |
| CERTIFICATIONS | SAE J845 Class 1 WS3-1 (100) certified (green is class 3 certified) ECE R10.05 certified |

ML6 Flush Mount Light



Single Colors **EML6E20(x)**

Dual Colors **EML6E20(xx)**

Replace (x) or (xx) in the Order Number for Standard Color Selection

Single Colors A = ● B = ● R = ● W = ○

Dual Colors AW = ●○ BA = ●● BW = ●○ GA = ●● RA = ●● RB = ●● RW = ●○

Features

- Compact, flush-mount emergency light to fit seamlessly into any vehicle design
- Features bright warning lights in both single and dual colors

| | |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INPUT VOLTAGE | 10-30 Vdc |
| CURRENT DRAW | 1 Amp max @ 12.8 Vdc |
| LIGHT SYNC | ML6 lights |
| FLASH PATTERNS | Single: 19 or Dual: 14 |
| OPERATING TEMPERATURE | -30° C to +50° C |
| DIMENSIONS | |
| Length | 1.38" (3.5 cm) |
| Height | 1.38" (3.5 cm) |
| Depth | 1.18" (2.99 cm) |
| CERTIFICATIONS | SAE J595, Class 1 certified (single colors) SAE J595, Class 2 certified (dual colors) ECE R65, Class 1, ECE R10.05 certified (amber, blue and red single colors) ECE R10.05 certified (white, single color) ECE R10.05 certified (dual colors) |
| WARRANTY | Three-year |

GHØST

Surface and Deck/Grille Mount Lights

Surface Mounts



Single

Black Housing, 10-16 Vdc
 Chrome Housing, 10-16 Vdc
 White Housing, 10-16 Vdc
 Black Housing, 10-30 Vdc
 Chrome Housing, 10-30 Vdc
 White Housing, 10-30 Vdc

EGHST2(x)B-12
 EGHST2(x)C-12
 EGHST2(x)W-12
 EGHST2(x)
 EGHST2(x)C
 EGHST2(x)W

ECE R65 Certified, Xylex Lens

Black Housing, 10-16 Vdc
 Chrome Housing, 10-16 Vdc
 White Housing, 10-16 Vdc

EGHSTE2(x)B-EU
 EGHSTE2(x)C-EU
 EGHSTE2(x)W-EU

ECE R65/EMC Certified

Black Housing, 10-30 Vdc
 Chrome Housing, 10-30 Vdc
 White Housing, 10-30 Vdc

EGHSTE2(x)B
 EGHSTE2(x)C
 EGHSTE2(x)W

Amber, blue or red LED solid color options only on certified lights



Single Stop/Tail

Black Housing, 10-30 Vdc
 Black Housing, 10-30 Vdc
 Chrome Housing, 10-30 Vdc
 White Housing, 10-30 Vdc
 White Housing, 10-30 Vdc

EGHSTT2(x)B
 EGHSTT2(x)B
 EGHSTT2(x)C
 EGHSTT2(x)W
 EGHSTT2(x)W




Single Spot

Black Housing, 10-30 Vdc
 Chrome Housing, 10-30 Vdc
 White Housing, 10-30 Vdc
 White LED, solid color

EGHSTS2W
 EGHSTS2WC
 EGHSTS2WW

Deck/Grills Mounts



Single Multi

Black Housing, 10-16 Vdc
 White Housing, 10-16 Vdc
 Black Housing, 10-30 Vdc
 White Housing, 10-30 Vdc
 ECE 65/EMC Certified

EGHST1(x)-12
 EGHST1(x)W-12
 EGHST1(x)
 EGHST1(x)W

Black Housing, 10-16 Vdc

EGHSTE1(x)B

ECE 65/EMC Certified

White Housing, 10-16 Vdc

EGHSTE1(x)W

Xylex Lens

Black Housing, 10-16 Vdc
 White Housing, 10-16 Vdc

EGHSTE1(x)B-EU
 EGHSTE1(x)W-EU

Amber, blue or red LED solid color options only on xylex lens lights

Single Stop/Tail Multi

Black Housing, 10-16 Vdc
 White Housing, 10-16 Vdc
 Red LED, solid color

EGHSTTR
 EGHSTTRW

Single Spot Mount

Black Housing, 10-30 Vdc
 White Housing, 10-30 Vdc
 White LED, solid color

EGHSTS1W
 EGHSTS1WW

UNIVERSAL ACCESSORY

Lights sold separately. Refer to pages 45, 46 and 47 for vehicle specific accessories.

ROCK MOUNT

Deck/Grille (includes mounting hardware)

PMP4BKRKLB

GHOST Recess Mount Lights

Recess Mounts



Single Mount

Black Housing, 10-16 Vdc

EGHST5(x)B-12

Chrome Housing, 10-16 Vdc

EGHST5(x)C-12

Black Housing, 10-30 Vdc

EGHST5(x)B

Chrome Housing, 10-30 Vdc

EGHST5(x)C

ECE R65/EMC Certified, Xylex Lens

Black Housing, 10-30 Vdc

EGHSTE5(x)B-EU

Chrome Housing, 10-30 Vdc

EGHSTE5(x)C-EU

Black Housing, 10-30 Vdc

EGHSTE5(x)B

ECE R65/EMC Certified

Chrome Housing, 10-30 Vdc

EGHSTE5(x)C

Amber, blue or red LED solid color options only on certified lights

Single Stop/Tail Mount

Black Housing, 10-30 Vdc

EGHSTT5(x)B

Chrome Housing, 10-30 Vdc

EGHSTT5(x)C

Single Spot Mount

Black Housing, 10-30 Vdc

EGHSTS2WB

Chrome Housing, 10-30 Vdc

EGHSTS2WC

White LED, solid color

Replace (x) in the Order Number for Standard Color Selection

Solid Colors A = ● B = ● G = ● R = ● W = ○

Split Colors A = ● B = ● G = ● R = ● W = ○ D = ●○ E = ●○ F = ●○ J = ●● K = ●● L = ●● M = ●●
N = ●● P = ●●

Features

- Fits almost anywhere with premium optics offer optimal power and brightness
- Premium optics offer optimal power and brightness

| | |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INPUT VOLTAGE | 10-16 Vdc or 10-30 Vdc |
| CURRENT DRAW | <0.75 Amp (flash pattern dependent) |
| LIGHT SYNC | 4 single sync, 1 lighthouse |
| FLASH PATTERNS | 33 flash patterns |
| LED COUNT | 6 LEDs |
| OPERATING TEMPERATURE | -40° C to +65° C / -40° F to +149° F |
| DIMENSIONS | Single Multi, Single Stop Tail Multi, Single Spot or Rock Length 5.7" (14 cm) Height 1.06" (2.7 cm) Depth 1.8" (4.6 cm) Length 5.4" (14 cm) Height 2.4" (6.1 cm) Depth 1" (2.5 cm) |
| MOUNTING | Multi Includes three mounting options; permanent, single edge and 3M adhesive mounts 4" (10 cm) L x 0.9" (2.3 cm) H x 1.8" (4.6 cm) D Rock 4.8" (12 cm) L x 2" (5.1 cm) H x 1.6" (4.1 cm) D Stop/Tail Multi Includes two mounting options; permanent and 3M adhesive mounts |
| CERTIFICATIONS | SAE J595 Class 1 certified CA Title 13, Article 22 compliant EMC certified, 72/245/EEC ECE R65, Category X, Class 1 certified |
| WARRANTY | Five-year |

Universal UnderCover LED Insert



10 feet cable length **ELUC3H010(x)**
 25 feet cable length **ELUC3H025(x)**

Replace (x) in the Order Number for Standard Color Selection

Solid Colors A = ● B = ● G = ● R = ● W = ○

Dual Colors D = ●○ E = ●○ F = ●○ H = ●○ J = ●● K = ●● L = ●● M = ●● N = ●● P = ●●

Features

- Features separate color control capability
- Secondary function can be flashing or steady burn
- Includes extreme angle lens, inline flasher and cable for hardwire installation
- Use with optional bezels to surface mount to any flat area on the vehicle body for additional lighting anywhere
- Compatible with the ConfigureIT system for easy light programming

INPUT VOLTAGE 9-32 Vdc

CURRENT DRAW <.65 Amp (flash pattern dependent) @ 12.8 Vdc, <0.33 Amp @ 25.6 Vdc

LIGHT SYNC 24 single, sync 2 lightheads

FLASH PATTERNS 12 single color or 14 dual color

LED COUNT 6 LEDs

OPERATING TEMPERATURE -40° C to +65° C

DIMENSIONS **Insert**

Height .9" (2.3 cm)

Diameter 1.5" (3.8 cm)

Bezel

Height 1.65" (4.2 cm)

Diameter .63" (1.6 cm)

Length 2.2" (5.6 cm)

MOUNTING Headlight and taillight mounts into 1" diameter cutout

Screw-in surface mount with optional bezel

Bezel mounts on 1.89" (4.8 cm) centers

Twist-in or push-in options are also available

UNIVERSAL ACCESSORIES

Light and replacement modules sold separately.

| | | |
|---------------|------------------------------------------------|------------------|
| BEZELS | Black (includes mounting gasket and hardware) | PLUC2HSB |
| | Chrome (includes mounting gasket and hardware) | PLUC2HSC |
| | White (includes mounting gasket and hardware) | PLUC2HSW |
| LENS | Extreme angle | PLUC2LN1E |
| | Horizontal | PLUC2LN1H |
| | Vertical | PLUC2LN1V |

Warning Marker and Recess Lights

Marker



Two Inch, Round

Amber LEDS/Amber Lens

ECVML202Y

Grommet and Mating Harness

Red LEDS/Red Lens

ECVML202R

Grommet and Mating Harness

Amber LEDS/Amber Lens

ECVML203Y

Integrated Waterproof Flange Mount

Red LEDS/Red Lens

ECVML203R

Integrated Waterproof Plange Mount



Two and a Half Inch, Round

Amber LEDS/Amber Lens

ECVML252Y

Grommet and Mating Harness

Red LEDS/Red Lens

ECVML252R

Grommet and Mating Harness

Amber LEDS/Amber Lens

ECVML252Y-D

Grommet and Deutsche Connector

Red LEDS/Red Lens

ECVML252R-D

Grommet and Deutsche Connector

Amber LEDS/Amber Lens

ECVML252Y-D24V

24 Volt with Grommet and Deutsche Connector

Red LEDS/Red Lens

ECVML252R-D24V

24 Volt with Grommet and Deutsche Connector



License Plate, Compact

Standard

ECVLPBLED

Deutsch Connector

ECVLPBLED-D

TWO INCH

FMVSS 108 certified; Sidemarkers Lamp, P2 rated; Clearance, Sidemarkers and LD Lamp, P3 rated; SAE J592 and J2042 certified

TWO AND A HALF INCH

FMVSS 108 certified; Sidemarkers Lamp, P2 rated; Clearance, Sidemarkers and LD Lamp, P3 rated; SAE J592 and J2042 certified

LICENSE PLATE

FMVSS 108 certified and SAE J587 certified

Recess



Four Inch, Round

Amber LEDS/Clear Lens

ERDREBZA



Six Inch, Oval

Amber LEDS/Clear Lens

EOVREBZA

FOUR INCH

SAE J595 certified and California Title 13, certified compliant

SIX INCH

SAE J595 Class 1 certified

UNIVERSAL ACCESSORY

Light sold separately.

DRESS RING

Recess, six inch oval chrome

ECV06CHRM



Chevrolet Vehicle Specific Perimeter Accessories

Lights and modules sold separately.

mpower® FASCIA BRACKET KITS

REAR SPOILER, STUD MOUNTS

Tahoe, 2015-2020

Four inch, three lights per passenger and driver side

PMP2RSBTH3

Four inch, four lights per passenger and driver side

PMP2RSBTH4

UNDER MIRROR MOUNTS

Silverado, 2018 and 2019

Three inch, stud and quick mount

PMP1BKUMB2

Tahoe, 2015-2020

Three inch, stud and quick mount

PMP1BKUMB3

Three and four inch, stud and quick mount, driver side

PNT3BKUMB3-D

Three and four inch, stud and quick mount, passenger side

PNT3BKUMB3-P

GMC Sierra, 2018 and 2019

Three inch, stud and quick mount

PMP1BKUMB2

nFORCE® BRACKET KITS

REAR SPOILER, SURFACE MOUNTS

Tahoe, 2015-2020

Rear spoiler, single

PNFSLRSBUVS

Tahoe, 2015-2020

Behind grille, passenger and driver side

PNFSLDGSB-TH

BRACKET

Tahoe, 2015-2020

Front deck/grille, driver and passenger side

PGHSTDGSB-TH

FOG LIGHT KIT

SURFACE MOUNT

Tahoe, 2015-2020

Fog light bezels, mounting plates and hardware, driver and passenger side

PNFSLFLKTTTH

Intersector BRACKET KITS

UNDER MIRROR MOUNTS

Tahoe, 2015-2020

Surface mount, driver

PNT3BKUMB3-D

Surface mount, passenger

PNT3BKUMB3-P

BRACKETS

DECK/GRILLE MOUNTS

Tahoe, 2015-2020

Spoiler bracket

PNT3DG8B-TH

Mount

PNT3DG8B

SURFACE ADAPTOR

UNDER MIRROR

Caprice, 2011-2017

Curved, sold in pairs

PNT1CRV02

GHOST® BRACKETS

SINGLE SURFACE MOUNT

Tahoe, 2015-2020

Behind the grille installation, driver and passenger side

PNFSLDGSB-TH

Vertical license plate installation

PNFSLBRK2LPV

SINGLE DECK/GRILLE MOUNT

Tahoe, 2015-2020

Front deck/grille, driver and passenger side

PGHSTDGSB-TH



Ford Vehicle Specific Perimeter Accessories

Lights and modules sold separately.

mpower® Fascia BRACKET KITS

REAR SPOILER, STUD MOUNTS

PI Utility, 2020

| | |
|-------------------------------------------------------|-----------|
| Four inch, one light per driver and passenger side | PMP2RS102 |
| Four inch, two lights per driver and passenger side | PMP2RS202 |
| Four inch, three lights per driver and passenger side | PMP2RS302 |
| Four inch, four lights per driver and passenger side | PMP2RS402 |
| Hardware kit, mpower arrow | PMPAKH05 |

Three and four light configurable arrow kit options. Contact your sales representative.

UNDER MIRROR MOUNT

PI Utility, 2020

| | |
|----------------------------------------------------------------------|------------|
| Three and four inch, stud and quick mount, driver and passenger side | PMP2BKUMB4 |
|----------------------------------------------------------------------|------------|

PI Utility, 2015-2019

| | |
|-------------------------------------------------------------|------------|
| Four inch, one light per driver and passenger side | PMP2RSBUB1 |
| Four inch, two lights per driver and passenger side | PMP2RSBUB2 |
| Four inch, three lights per driver and passenger side | PMP2RSBUB3 |
| Four inch, four lights per driver and passenger side | PMP2RSBUB4 |
| Four x Two inch, one light per driver and passenger side | PMP2RS101 |
| Four x Two inch, two lights per driver and passenger side | PMP2RS201 |
| Four x Two inch, three lights per driver and passenger side | PMP2RS301 |
| Four x Two inch, four lights per driver and passenger side | PMP2RS401 |
| Hardware kit, mpower arrow | PMPAKH04 |

nFORCE® BRACKETS

REAR SPOILER, SURFACE MOUNTS

PI Utility, 2011-2020

| | |
|----------------------|-------------|
| Rear spoiler, single | PNFSLRSBUVS |
|----------------------|-------------|

PI Utility, 2011-2020

| | |
|----------------------|-------------|
| Dual, driver side | PNFSLRSBUVD |
| Dual, passenger side | PNFSLRSBUVP |

PI Utility, 2011-2017

| | |
|---------------------------------|------------|
| Dual, driver and passenger side | PNFSLRSBTH |
|---------------------------------|------------|

45 DEGREE ANGLE, SURFACE MOUNT

PI Utility, 2011-2017

| | |
|------------------|-------------|
| Horizontal mount | PNFSLBRK145 |
|------------------|-------------|

Intersector BRACKET KITS

PI Utility, 2016-2019

PMP2BKUMB1

PI Utility, 2020

PMP2BKUMB4

SURFACE ADAPTOR

UNDER MIRROR

Explorer, 2013-2017

PNT1CRV05

Sedan, 2013-2017

PNT1CRV04

Lights and modules sold separately.

Lights and modules sold separately.

mpower® FASCIA BRACKET KITS

REAR SPOILER, STUD MOUNTS

Durango, 2011-2020

Four inch

PMP2RSBDG3

UNDER MIRROR MOUNTS

Durango, 2016-2020

Three and four inch, stud and quick mount

PNT3BKUMB4

Durango, 2018-2020

Three inch, stud and quick mount

PMP1BKUMB1

Ram 1500 Classic, 2014-2020

Three and four inch, stud and quick mount, driver side

PNT3BKUMB2-D

Three and four inch, stud and quick mount, passenger side

PNT3BKUMB2-P

Intersector BRACKET KITS

UNDER MIRROR MOUNTS

Durango, 2016-2020

PNT3BKUMB4

Durango, 2018-2020

PMP1BKUMB1

Ram 1500 Classic, 2014-2020

Surface mount, driver

PNT3BKUMB2-D

Surface mount, passenger

PNT3BKUMB2-P

SURFACE ADAPTOR

UNDER MIRROR

Charger, 2011-2020

PNT1CRV03

Durango, 2013-2019

PNT1CRV06