



RAM HYDRAULIC DRIVEN AIR COMPRESSOR


AIR COMPRESSOR			
Capacity (CFM)	125	160	185
Air (PSI)	100-150	100-150	100-150
Hydraulic (GPM)	27.6-29.2	36.8-38.3	42.2-44.2
Hydraulic Pressure (PSI)	2100-2620	2200-2700	2400-2830
Oil Capacity (Gal.) Initial Fill	2.5	2.5	2.5

Dry Weight (Lbs.): 453 (125-160 CFM), 453-491 (185 CFM)

GENAIR



RAM

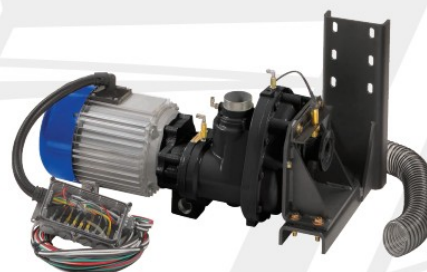

PTO SHAFT DRIVEN AIR COMPRESSOR & GENERATOR

AIR COMPRESSOR			
Capacity (CFM)	125	160	185
Air (PSI)	100-150	100-150	100-150
Compressor Input (RPM)	1535	1880	2160
Oil Capacity (Gal.) Initial Fill	2.5	2.5	2.5

Dry Weight (Lbs.): 513(min.) - 554 (max.)

GENERATOR (TEFC)			
Output (continuous)	6.6 kW	OR	9.6 kW
Voltage	120 or 120/240		120 or 120/240
Phase	Single Phase		Single Phase
Speed	3600 RPM		3600 RPM
Protection Degree	IP54		IP54
Type	Brushless AVR		Brushless AVR



PTO SHAFT DRIVEN AIR COMPRESSOR & GENERATOR

AIR COMPRESSOR		
Capacity (CFM)	125	160
Air (PSI)	100-150	100-150
Compressor Input (RPM)	1940	2435
Oil Capacity (Gal.) Initial Fill	2.5	2.5

Dry Weight (Lbs.): 449(min.) - 510(max.)

GENERATOR (TEFC)			
Output (continuous)	6.6 kW	OR	9.6 kW
Voltage	120 or 120/240		120 or 120/240
Phase	Single Phase		Single Phase
Speed	3600 RPM		3600 RPM
Protection Degree	IP54		IP54
Type	Brushless AVR		Brushless AVR



FREIGHT NOT
INCLUDED IN
PRICE OF UNIT.
FREIGHT WILL
BE BILLED UPON
PURCHASE.