

DRAG PRO®



TIME SAVED IS MONEY EARNED

The BOSS DRAG PRO® brings power and productivity to the back of your truck. The DRAG PRO® mounts from the rear, allowing you to pull snow from the back while clearing large areas like commercial parking lots. Expand the hydraulic folding wings up to a maximum of 16' to clear more snow with each pass—saving time and money. The down force of the plow helps the DRAG PRO® scrape more cleanly and efficiently than traditional plows, especially in wet snow. Pair with BOSS V-plows, straight-blade plows or EXT plows for the ultimate plowing rig.



STANDARD FEATURES

- **Hydraulic Folding Wing Models** expand plow width from 8' to 12' or 8' to 16'.
- **Independent Wing Control** is featured on expanding wing models with hydraulic relief protection.
- **Low-Profile Coupler Design** allows for unobstructed tailgate use and visibility.
- **Easy Attach/Detach** saves time for quick operation on 4WD, ¾-ton and 1-ton trucks.
- **High-Performance Hydraulic Package** delivers reliability and speed.
- **Hydraulic Flow Control Valve** allows adjustment of the raise/lower speed.
- **Steel Blade Cutting Edge** and urethane wing edges are included.
- **Molded-In Urethane Snow Catchers** ensure no snow is left behind when plowing.




> MODELS

8' Fixed Wing

8'-16' Hydraulic Folding Wing

8'-12' Hydraulic Folding Wing

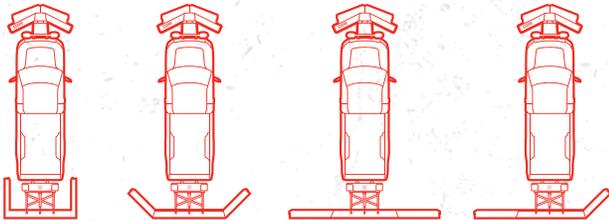

Multiple wing configurations provide added versatility to quickly and easily clear the job site.



TIME SAVER

Make quick work of even the biggest jobs by adding a DRAG PRO® to the back of your truck.



PRODUCTIVITY BOOSTER

Make the most of every minute. The DRAG PRO® speeds up snow clearance, making every job faster and easier.

DRAG PRO®
8'-12' Retracted



DRAG PRO®



SEE IT IN ACTION
BOSSPLOW.COM

Ask Your BOSS Dealer About
Optional Rubber Edge Kit

Intended Uses: Driveways, Loading Docks, Empty Parking
Lots and Occupied Parking Lots/Aisles

PERSONAL-USE PLOWS

HTX V-BLADES AND STRAIGHT-BLADES

VEHICLE APPLICATION: LIGHT-DUTY, 4WD, ½- AND ¾-TON TRUCKS AND SUVs



Specifications	7'6" HTX V-Plow Steel	7' HTX Straight Steel / Poly / Stainless	7'6" HTX Straight Steel / Poly / Stainless
Blade Width (Straight) Curb Guard Width*	90" (229 cm) 94.2" (239.2 cm)	84" (213 cm) N/A	90" (229 cm) N/A
Plowing Width (V Position) Curb Guard Width*	81" (206 cm) 82.75" (210.2 cm)	N/A	N/A
Plowing Width (Scoop) Curb Guard Width*	74" (188 cm) 86.75" (220.4 cm)	N/A	N/A
Plowing Width @ 30° Angle	78" (198 cm)	73" (185 cm)	78" (198 cm)
Blade Height	32" (81 cm) at end; 25" (64 cm) at center	26" (66 cm)	26" (66 cm)
Blade Thickness	14-ga steel	14-ga (0.19 cm) steel / ¼" (0.6 cm) poly / 14-ga (0.19 cm) stainless steel	14-ga (0.19 cm) steel / ¼" (0.6 cm) poly / 14-ga (0.19 cm) stainless steel
Cutting Edge	¾" x 6" (0.95 cm x 15 cm) (AR450)	¾" x 6" (0.95 cm x 15 cm)	¾" x 6" (0.95 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	4 vertical, 2 diagonal	6 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs	2	2	2
SmartLock® Cylinders	1¼" x 8¼" (3 cm x 21 cm)	N/A	N/A
Angle Cylinders	N/A	1½" x 6½" (4 cm x 17 cm)	1½" x 6½" (4 cm x 17 cm)
Lift Cylinder	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch® 2	SmartHitch® 2	SmartHitch® 2
Plow Weight**	490 lb ^c (222 kg)	393 lb ^c (178 kg) / 367 lb ^c (167 kg) / 393 lb ^c (178 kg)	440 lb ^c (200 kg) / 416 lb ^c (189 kg) / 440 lb ^c (200 kg)
Plow Lights	SL3 LED with Ice Shield Technology™	SL3 LED with Ice Shield Technology™	SL3 LED with Ice Shield Technology™
D-Force®	N/A	Optional	Optional

*Maximum product width. **Plow weight does not include vehicle mount weight. ^cVehicle mount weight range: 45-75 lb (20-34 kg).

PROFESSIONAL-USE PLOWS

DRAG PRO®

VEHICLE APPLICATION: 4WD, ¾- TO 1-TON TRUCKS



Specifications	8' Fixed Wing	8'-12' Hydraulic Folding Wing	8'-16' Hydraulic Folding Wing
Blade Width (Folded)	96" (244 cm)	96" (244 cm)	96" (244 cm)
Blade Width (Extended)	N/A	144" (366 cm)	192" (488 cm)
Plow Weight*	780 lb ^b (354 kg)	790 lb ^b (358 kg)	890 lb ^b (404 kg)
Moldboard Height	24" (61 cm)	24" (61 cm)	24" (61 cm)
Moldboard Thickness	11-ga steel	11-ga steel	11-ga steel
Moldboard Cutting Edge	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Wing Cutting Edges	1½" x 6" (4 cm x 15 cm)	1½" x 6" (4 cm x 15 cm)	1½" x 6" (4 cm x 15 cm)
Wing Cylinders	N/A	2¼" x 1½" x 5½" (6 cm x 3 cm x 13 cm)	2¼" x 1½" x 5½" (6 cm x 3 cm x 13 cm)
Lift Cylinder	2¼" x 1½" x 12" (6 cm x 3 cm x 31 cm)	2¼" x 1½" x 12" (6 cm x 3 cm x 31 cm)	2¼" x 1½" x 12" (6 cm x 3 cm x 31 cm)
Adjustable Raise/Lower Valve	Standard	Standard	Standard

*Plow weight does not include vehicle mount weight. ^bVehicle mount weight range: 75-105 lb (34-48 kg).

FREIGHT NOT
INCLUDED IN
PRICE OF UNIT.
FREIGHT WILL
BE BILLED UPON
PURCHASE.