

W/XO

SNOW PLOWS

FEATURING NEW

VXX105II Class 4/5/6 V-Plow See pg. 26 - 27

PLUS ScoopDogg Pushers by Buyers See pg. 6 - 7

NOTHING WORKS LIKE A DOGGTM

Snow Plow Specifications





	Medium Duty Plows (pg. 14-15)				
Specifications	MD68II	MD75II	MD80II		
Width	80"	90"	96"		
Blade Height	24"	24"	24"		
Material	SS	SS	SS		
Thickness	.075"	.075"	.075"		
Angle Cylinders	1½" x 10"	1½" x 10"	11⁄2" x 10"		
Lift Cylinders	1½" x 6"	1½" x 6"	11⁄2" x 6"		
Kingpin Size	1"	1"	1"		
Width at Angle	69.2"	78"	83"		
Ribs	6	8	10		
Springs	2	2	2		
Trip Style	Full	Full	Full		
Cutting Edge	3/8" x 6"	3/8" x 6"	1/2" x 6"		
Weight ¹	380 lb	400 lb	439 lb		
Deflector	Std.	Std.	Std.		
Shoes	Cast	Cast	Cast		

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight



Heavy Duty Full Trip Plow, Weight Optimized for Lighter Trucks 1/2 Ton Trucks with Plow Prep, 3/4 Ton and Heavier Trucks



	Heavy Duty Plows (pg. 18-19)		
Specifications	HD75II	HD80II	
Width	90"	96"	
Blade Height	29"	29"	
Material	SS	SS	
Thickness	.105"	.105"	
Angle Cylinders	11⁄2" x 12"	11⁄2" x 12"	
Lift Cylinders	2" x 6"	2" x 6"	
Kingpin Size	1-1/8"	1-1/8"	
Width at Angle	78"	83"	
Ribs	9	9	
Springs	4	4	
Trip Style	Full	Full	
Cutting Edge	3/8" x 6"	3/8" x 6"	
Weight ¹	680 lb	700 lb	
Deflector	Std.	Std.	
Shoes	Cast	Cast	
¹ Weight Not Including Truck Mount, 40	-80lbs. Typical Weight		





Commercial Duty Full Trip Plow 3/4 Ton Trucks with Plow Prep, 1 Ton and Heavier Trucks

Commercial Duty Plows (pg. 20-21)				
Specifications	EX75II	EX80II	EX85II	EX90II
Width	90"	96"	102"	108"
Blade Height	31"	31"	31"	31"
Material	SS	SS	SS	SS
Thickness	.105"	.105"	.105"	.105"
Angle Cylinders	1½" x 12"	11⁄2" x 12"	1½" x 12"	1½" x 12"
Lift Cylinders	2" x 6"	2" x 6"	2" x 6"	2" x 6"
Kingpin Size	11/8"	11/8"	11/8"	11/8"
Width at Angle	78"	83"	88.3"	93.5"
Ribs	9	9	9	9
Springs	4	4	4	4
Trip Style	Full	Full	Full	Full
Cutting Edge	1/2" x 6"	1/2" x 6"	1/2" x 6"	1/2" x 6"
Weight ¹	745 lb	765 lb	785 lb	805 lb
Deflector	Std.	Std.	Std.	Std.
Shoes	Cast	Cast	Cast	Cast

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight



3/4 Ton Trucks with Plow Prep, 1 Ton and Heavier Trucks



	Commercial Duty Trip Edge Plows (pg. 22-23)				
Specifications	TE75II	TE80II	TE90II		
Width	90"	96"	108"		
Blade Height	31"	31"	31"		
Material	SS	SS	SS		
Thickness	.105"	.105"	.105"		
Angle Cylinders	1½" x 12"	1½" x 12"	11⁄2" x 12"		
Lift Cylinders	2" x 6"	2" x 6"	2" x 6"		
Kingpin Size	11⁄8"	11/8"	11/8"		
Width at Angle	78"	83"	94"		
Ribs	8	8	8		
Springs	4	4	4		
Trip Style	Edge	Edge	Edge		
Cutting Edge	3/8"" x 6"	1/2" x 6"	1/2" x 6"		
Weight ¹	705 lb	772 lb	812 lb		
Deflector	Std.	Std.	Std.		
Shoes	Cast	Cast	Cast		
1 Weight Not Including Truck Mount 40, 2016, Tunical Weight					

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;

Snow Plow Specifications



1/2 Ton Trucks with Plow Prep, 3/4 Ton and Heavier Trucks

Medium Duty V Plow (pg. 16-17)

Specifications	VMD75II
Width	90"
Blade Height	26"/33"
Material	SS
Thickness	.075"
Angle Cylinders	1½" x 1¾" x 12"
Lift Cylinders	1½" x 6"
Kingpin Size	1"
Width at Angle	78"
Ribs	6
Springs	4
Trip Style	Edge
Cutting Edge	3/8" x 6"
Weight ¹	700 lb
Deflector	Std.
Shoes	Opt.
1 Mainht Mat In alvelia a Tra	al Maurat 40.00/ha Tursiaal Mainht

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight



Commercial Duty V Plow

3/4 Ton Trucks with Plow Prep, 1 Ton Trucks and Up

Commercial Duty V Plows (pg. 24-25)			
Specifications	VXF85II	VXF95II	
Width	102"	114"	
Blade Height	29"/37"	29"/37"	
Material	SS	SS	
Thickness	.105"	.105"	
Angle Cylinders	1½" x 1¾" x 12"	1½" x 1¾" x 12"	
Lift Cylinders	2" x 6"	2" x 6"	
Kingpin Size	1"	1"	
Width at Angle	88"	99"	
Ribs	8	8	
Springs	4	4	
Trip Style	Edge	Edge	
Cutting Edge	1/2" x 6"	1/2" x 6"	
Weight ¹	978 lb	998 lb	
Deflector	Std.	Std.	
Shoes	Opt.	Opt.	
¹ Weight Not Including	Truck Mount, 40-80lbs.	Typical Weight;	

XPII



Hydraulic Wings Expand from 8' - 10'

3/4 Ton Trucks with Plow Prep, 1 Ton Trucks and Up

Expandabl	e Wing Plow (pg. 28-29)	
Specifications	XP810II	
Width	96"-120"	
Blade Height	29"	
Material	SS	
Thickness	.105"	
Angle Cylinders	1½" x 12"	
Lift Cylinders	2" x 6"	
Kingpin Size	11/8"	
Width at Angle	104"	
Ribs	9	
Springs	6	
Trip Style	Full	
Cutting Edge	1/2" x 6"	
Weight ¹	1,150 lb	
Deflector	Std.	
Shoes	Cast	

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;



Commercial / Municipal Duty V Plow Class 4, 5, and 6 Trucks

Specifications	VXX105II*
Width	126"
Blade Height	35"/45"
Material	SS
Thickness	.105"
Angle Cylinders	1½" x 1¾" x 12"
Lift Cylinders	2" x 6"
Kingpin Size	1"
Width at Angle	109"
Ribs	8
Springs	4
Trip Style	Edge
Cutting Edge	5/8" x 6"
Weight ¹	1,038 lb
Deflector	Std.
Shoes	Opt.

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;





Commercial / Municipal Plow For Vehicles with 10,000 - 29,000 GVWR

Commercial / Municipal Plow (pg. 30-31)				
Specifications	CM90II	CM100II	CM110II	
Width	108"	120"	132"	
Blade Height	31"	31"	31"	
Material	SS	SS	SS	
Thickness	.105"	.105"	.105"	
Angle Cylinders	2" x 12"	2" x 12"	2" x 12"	
Lift Cylinders	2" x 6"	2" x 6"	2" x 6"	
Kingpin Size	11/8"	1 ¹ /8"	11⁄8"	
Width at Angle	92"	104"	116"	
Ribs	10 ²	10 ²	10 ²	
Springs	6	6	6	
Trip Style	Full	Full	Full	
Cutting Edge	5/8" x 6"	5/8" x 6"	5/8" x 6"	
Weight ¹	1,044 lb	1,084 lb	1,124 lb	
Deflector	Std.	Std.	Std.	
Shoes	Cast	Cast	Cast	
1 Mainhet Matthe aludian T	and Manual 10 0	Olha Turiaal Mainh	+ 20 Are Disease	

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight; ²2 Are Diagonal







Skid Steer Plows with Hydraulic Angling and Trip Edges Universal Skid Steer Mount

Skid Steer Plows (pg. 34-35)				
Specifications	SKTE75	SKTE80	SKTE90	
Width	90"	96"	108"	
Blade Height	31"	31"	31"	
Material	SS	SS	SS	
Thickness	.105"	.105"	.105"	
Angle Cylinders	11⁄2" x 12"	1½" x 12"	11⁄2" x 12"	
Lift Cylinders	N/A	N/A	N/A	
Kingpin Size	1 ½16	1 ½6"	1 ¹ ⁄ ₁₆ "	
Width at Angle	78"	83"	94"	
Ribs	8	8	8	
Springs	4	4	4	
Trip Style	Edge	Edge	Edge	
Cutting Edge	1/2" x 6"	1/2" x 6"	1/2" x 6"	
Weight ¹	781 lb	848 lb	888 lb	
Deflector	Std.	Std.	Std.	
Shoes	Cast	Cast	Cast	

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;






	UTV Plows (pg. 32	-33)	
Specifications	VUT65	MUT60	MUT68
Width	72"	72"	80"
Blade Height	25" / 31"	24"	24"
Material	SS	SS	SS
Thickness	.075"	.075"	.075"
Angle Cylinders	1½" x 1¾" x 8"	2" x 1½"	2" x 1½"
Lift Cylinders	1½" x 6"	1½" x 6"	1½" x 6"
Kingpin Size	11⁄8"	1"	1"
Width at Angle	60"	63"	69"
Ribs	6	6	6
Springs	2	2	2
Trip Style	Edge	Full	Full
Cutting Edge	1/4" x 5"	1/4" x 5"	3/8" x 6"
Weight ¹	400 lb	310 lb	360 lb
Deflector	N/A	Opt.	Opt.
Shoes	Opt.	Cast	Cast
1 Maight Nat Including Truck Mount A	0 00lba Tupical Waight		

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;





Skid-Steer (pg. 36-37)									
Specifications	2603108	2603110	2603112						
Width	8'	10'	12'						
Blade Height	39"	39"	39"						
Depth	37"	37"	37"						
Moldboard Gauge	7 Ga	7 Ga	7 Ga						
Moldboard Material	Carbon Steel	Carbon Steel	Carbon Steel						
Wear Surface Material	AR400 Steel	AR400 Steel	AR400 Steel						
Side Plate Thickness	5/16"	5/16"	5/16"						
Side Plate Support	3" x 3" x 1/4"	3" x 3" x 1/4"	3" x 3" x 1/4"						
Cutting Edge	1" x 8"	1" x 8"	1" x 8"						
Wear Surface Thickness	3/4"	3/4"	3/4"						
Minimum Horsepower	46	70	85						
Minimum Machine Weight	5,500 lb	7,000 lb	10,000 lb						
Weight	950 lb	1,125 lb	1,250 lb						
	Ba	ack Drag Kits							
Specifications	9153008	9153010							
Width	8' (For use with 2603108)	10' (For us	e with 2603110)						







Compact Tractor (pg. 36-37)									
Specifications	2604106	2604108	2604110						
Width	6'	8'	10'						
Blade Height	28"	28"	28"						
Depth	31"	31"	31"						
Moldboard Gauge	10 Ga	10 Ga	10 Ga						
Moldboard Material	Carbon Steel	Carbon Steel	Carbon Steel						
Wear Surface Material	AR400 Steel	AR400 Steel	AR400 Steel						
Side Plate Thickness	1/4"	1/4"	1/4"						
Side Plate Support	2" x 2" x 1/4"	2" x 2" x 1/4"	2" x 2" x 1/4"						
Cutting Edge	1" x 6"	1" x 6"	1" x 6"						
Wear Surface Thickness	3/4"	3/4"	3/4"						
Minimum Horsepower	30	40	50						
Minimum Machine Weight	2,500 lb	3,500 lb	4,500 lb						
Weight	400 lb	500 lb	600 lb						



Loader (pg. 38-39)										
Specifications	2601112	2601114	2601116	2601118	2601120					
Width	12'	14'	16'	18'	20'					
Blade Height	47"	47"	47"	47"	47"					
Depth	63"	63"	63"	63"	63"					
Moldboard Gauge	7 Ga									
Moldboard Material	Carbon Steel									
Wear Surface Material AR400 Steel		AR400 Steel	AR400 Steel	AR400 Steel	AR400 Steel					
Side Plate Thickness	3/8"	3/8"	3/8"	3/8"	3/8"					
Side Plate Support	4" x 4" x 3/8"									
Cutting Edge	1-1/2" 10"	1-1/2" 10"	1-1/2" 10"	1-1/2" 10"	1-1/2" 10"					
Wear Surface Thickness	1"	1"	1"	1"	1"					
Minimum Horsepower	100	120	125	140	170					
Minimum Machine Weight	13,000 lb	16,000 lb	25,000 lb	30,000 lb	40,000 lb					
Weight	2,200 lb	2,400 lb	2,600 lb	3,000 lb	3,600 lb					

BACKHOE SERIES PUSHERS



	Backhoe (pg. 40-41)									
Specifications	2602110	2602112	2602114							
Width	10'	12'	14'							
Blade Height	39"	39"	39"							
Depth	51"	51"	51"							
Moldboard Gauge	7 Ga	7 Ga	7 Ga							
Moldboard Material	Carbon Steel	Carbon Steel	Carbon Steel							
Wear Surface Material	AR400 Steel	AR400 Steel	AR400 Steel							
Side Plate Thickness	3/8"	3/8"	3/8"							
Side Plate Support	4" x 4" x 3/8"	4" x 4" x 3/8"	4" x 4" x 3/8"							
Cutting Edge	1-1/2" 10"	1-1/2" 10"	1-1/2" 10"							
Wear Surface Thickness	3/4"	3/4"	3/4"							
Minimum Horsepower	50	70	85							
Minimum Machine Weight	12,000 lb	15,000 lb	16,000 lb							
Weight	1,125 lb	1,450 lb	1,600 lb							



SANDBLAST

Remove all impurities and contaminants

PRIME Seal and fill any inconsistencies in the material

TOP COAT Acts as an additional primer and prepares the surface for the final treatment

SUPER DURABLE POLYESTER POWDERCOAT Protects your plow from the elements for years to come



WINTER DOESN'T KEEP

IMPROVED

TWO WAYS TO LIGHT UP THE NIGHT:



Brilliant Wide-Angle LEDs Over twice as bright as traditional halogens.

Active Defrosting Technology[™] Prevents streaky defrosting so 100% of the light shines through.

Long Lasting Power Go years without changing a bulb. **Powerful Halogens** Won't ice up in frigid conditions.

HX HIGH INTENSIT

HALOGENS

High Intensity Bulbs Our brightest halogen bulbs ever.

Optimized Internal Reflectors For focused high and low beams.

Dual-Post Captive Bolt Design Vibration resistant for years of use.

Need More Light?

Check Page 42 for the Illuminated LED Guides

BANKER'S HOURS.

VXX

SnowD

INSIST ON A PRODUCT





PRECISION WELDING

State-of-the-art robotic welding produces consistent, high quality welds for strong and durable joints.





METICULOUS QUALITY CONTROL

Each plow is inspected and tested at multiple points in its design and production cycle. Field and lab testing make sure plows are ready for the rigors of winter.

RAPID AVAILABILITY

When it comes to snow equipment, we realize no one has time to wait. That's why we stock a deep inventory of plows, electrical connectors, and mounts. Need an unusual mount? Give us a shout—we'll get it to you fast!

STATE-OF-THE-ART MANUFACTURING

FROM A COMPANY YOU CAN TRUST





FLOATING A-FRAME™

Our patented Floating A-Frame's sliding pin design lets SnowDoggs bite the ground for a clean, even scrape. As a bonus, the design also promotes even cutting-edge wear.



UNSTOPPABLE HYDRAULICS

A fully-enclosed 2 HP hydraulic power unit combined with hefty 3/8" hoses and SAE standard cartridge valves give SnowDoggs more responsive angling, stacking, and snow-throwing power.



EASY-TO-USE CONTROLS

The backlit one-handed controller puts all plow functions in the palm of your hand. It's simple to use, even with gloves on.

INNOVATIVE PRODUCT DESIGN


MOUNT AND DISMOUNT IN RECORD TIME WITH THE

RapidLink[™] Attachment System

1. Enter Mount Mode


Hold the Down Button for one second to activate float mode (blue light). Hold the Down Button again for one second to activate Mount Mode (red flashing light).






and check for Alignment

2. Drive Into the Plow






3. Lift Frame too High?

Push the JACK SWITCH into MOUNT (down) position to lower the rear of the lift frame.



Lift Frame too Low?

Back up the truck 6"-12" to allow room to raise the plow receiver. Push the JACK SWITCH into DISMOUNT (up) position to raise the rear of the lift frame.





4. Push Switch Down then

Make sure there is slack in the chain

Push Chain Lift Down

6. Insert Snapper Pin then Raise Drop Foot

See mount/dismount instructions located on the moldboard for more information. Be sure to register your plow at www.BuyersProducts.com where you can also find installation instructions, technical specs and full parts diagrams.

Our simple and reliable RapidLink[™] and Jack Switch allow you to adjust the plow's mounting height to different trucks or mounting conditions.

SnowDog

Buvers

RapidLink is patent pending.



JOE

_

TT 1

T

STANDARD FEATURES

Full Size Features with Half the Weight Weight optimized for 1/2 ton trucks or ŠUVs (even with no plow prep). Floating A-Frame[™]

Contour the road for clean scraping and even cutting edge wear.

304 Stainless Steel Moldboard & 3/8" Steel Cutting Edge* An investment that will last.

Six 3/16" Laser-Cut Steel Ribs and a Full-Length Cross Tube Provides maximum strength and stability across the length of the plow.

Full Trip Action Two stress-optimized trip springs protect from hidden curbs and obstacles.


*1/2" Steel Cutting Edge on MD80

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Cast Plow Shoes Wire Reinforced Blade Guides In-Cab Controller







RapidLink[™] Attachment System Mount and dismount the plow in a minute or less. See page 12 for details.



Municipal Style Chain Lift Stack high and adjust easily.


SNOWDOGG



Fully Enclosed Hydraulic Power Unit

Gain easy access via large maintenance panel.



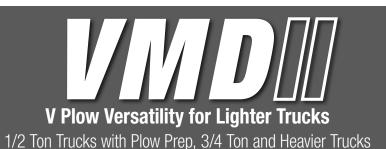

STANDARD FEATURES

Full Size Features with Half the Weight Weight optimized for lighter trucks.

Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear. **304 Stainless Steel Moldboard & 3/8" Steel Cutting Edge** An investment that will last.

Eight Laser-Cut Steel Ribs and Two Full-Length Cross Tubes Provides maximum strength and stability across the length of the plow.

Double Acting Angle Cylinders Back drag with confidence, even in tight spaces.

Trip Edge Design Each wing has a 6" trip edge that protects from hidden curbs and obstacles.

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Wire Reinforced Blade Guides In-Cab Controller Single hand operation.





RapidLink[™] Attachment System Mount and dismount the plow in a minute or less. See page 12 for details.



Municipal Style Chain Lift Stack high and adjust easily.



Fully Enclosed Hydraulic Power Unit

Gain easy access via large maintenance panel.





1/2 Ton Trucks with Plow Prep, 3/4 Ton and Heavier Trucks

STANDARD FEATURES

Four Stress-Optimized Trip Springs Protect your equipment from hidden curbs and obstacles.

Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

Municipal Style Chain Lift Stack high and adjust easily.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 3/8" Steel Cutting Edge An investment that will last.

Central Hydraulic-Operated Lift Frame Available

INCLUDED ACCESSORIES

Heavy Duty Shock Kit Contoured Poly Snow Deflector Cast Shoes Wire Reinforced Blade Guides Backlit Controller Single hand operation.



Shown with HX High Intensity Halogens Also available with Illuminator™ Heated LED Plow Lights

RapidLink[™] Attachment System

Mount and dismount the plow in a minute or less. See page 12 for details.



Optional Wings - Part No. | 16021510 Add a full 2' of width to your plow with the HD Series Plow Wing Kit. Wings rotate behind plow for easy stowage, no lifting required. Pin shears upon impact to protect from damage.





3/4 Ton Trucks with Plow Prep, 1 Ton and Heavier Trucks

STANDARD FEATURES

Four Stress-Optimized Trip Springs Protect your equipment from hidden curbs and obstacles.

Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

Municipal Style Chain Lift Stack high and adjust easily.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 1/2" Steel Cutting Edge An investment that will last.

Central Hydraulic-Operated Lift Frame Available

INCLUDED ACCESSORIES

Heavy Duty Shock Kit Contoured Poly Snow Deflector Cast Shoes Wire Reinforced Blade Guides Backlit Controller Single hand operation.







RapidLink[™] Attachment System Mount and dismount the plow in a minute or less. See page 12 for details.



Optional Wings - Part No. | 16021610 Add a full 2' of width to your plow with the EX Series Plow Wing Kit. Wings rotate behind plow for easy stowage, no lifting required. Pin shears upon impact to protect from damage.





STANDARD FEATURES

Trip Edge Design Allows for plowing over obstacles. Great for gravel, dirt, or uneven roads.

Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

Municipal Style Chain Lift Stack high and adjust easily.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 1/2" Steel Cutting Edge* An investment that will last.

Central Hydraulic-Operated Lift Frame Available *3/8" Steel Cutting Edge on TE75II

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Cast Shoes Wire Reinforced Blade Guides Backlit Controller Single hand operation.

Available Sizes **90", 96", 108"**



Shown with HX High Intensity Halogens Also available with Illuminator[™] Heated LED Plow Lights

RapidLink[™] Attachment System Mount and dismount the plow in a minute or less. See page 12 for details.



Optional Wings - Part No. | 16021310 Add a full 2' of width to your plow with the TE Series Plow Wing Kit.





STANDARD FEATURES

Trip Edge Design Allows for plowing over obstacles. Great for gravel, dirt, or uneven roads.

Standard Double Acting Angle Cylinders Back drag with ease.

Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

Municipal Style Chain Lift Stack high and adjust easily.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 1/2" Steel Cutting Edge An investment that will last.

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Wire Reinforced Blade Guides Backlit Controller

Switch from V to scoop or angled positions with one button, or maintain independent wing control for finer adjustments.








Shown with HX High Intensity Halogens Also available with Illuminator[™] Heated LED Plow Lights

RapidLink[™] Attachment System Mount and dismount the plow in a minute or less. See page 12 for details.



Optional Wings - Part No. | 16021712 Add a full 2' of width to your plow with the VXF Series Plow Wing Kit.





STANDARD FEATURES

Trip Edge Design Allows for plowing over obstacles. Great for gravel, dirt, or uneven roads.

Standard Double Acting Angle Cylinders Back drag with ease.

Heavy-Duty Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

Designed to Take on the Big Jobs 1/2" thick trip angles and a 1-1/4" diameter center hinge pin provide unparalleled strength.

Municipal Style Chain Lift Stack high and adjust easily.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 5/8" Steel Cutting Edge An investment that will last.

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Wire Reinforced Blade Guides Backlit Controller Switch from V to scoop or angled positions with one button, or maintain independent wing control for finer adjustments.

Available Sizes **126**"



Shown with Illuminator™ **Heated LED Plow Lights**

RapidLink[™] Attachment System Mount and dismount the plow in a minute or less. See page 12 for details.



Municipal Style Chain Lift Stack high and adjust easily.



Structurally Reinforced 1/2" thick trip angles and a 1-1/4" diameter center hinge pin provide unparalleled strength.





STANDARD FEATURES

True 10' Wide Scoop For efficient snow control and clearing.

Adjustable Flared Wings Can be operated independently for superior windrowing and maneuverability.

Nine Laser Cut Steel Ribs Provide reliable strength.

Floating A-Frame Contour the road for a clean scrape and even cutting edge wear.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 1/2" Steel Cutting Edge An investment that will last.

INCLUDED ACCESSORIES

Contoured Belted Rubber Snow Deflector Cast Shoes Wire Reinforced Blade Guides Heavy Duty Shock Kit In-Cab Controller





Shown with Illuminator™ Heated LED Plow Lights

Ultimate Versatility

Retract/expand one or both flared wings at the press of a button to efficiently maneuver, windrow, and clear snow.



NEXT GENERATION



STANDARD FEATURES

31" High / 108" or 120" or 132" Wide Moldboard Makes the CM a powerful snow mover for commercial and municipal applications.

10 Vertical and 2 Diagonal Ribs Create robust strength to handle heavy, wet snow.

Heavy-Duty Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

304 Stainless Steel Moldboard & 5/8" Steel Cutting Edge An investment that will last.

6 Stress-Optimized Trip Springs Provide up to 85° of smooth full-moldboard trip action. *Central Hydraulic-Operated Lift Frame Available*

INCLUDED ACCESSORIES

Heavy Duty Belted Rubber Snow Deflector Wire Reinforced Blade Guides Cast Plow Shoes Controller

Available Sizes **108", 120", 132"**



Shown with HX High Intensity Halogens Also available with Illuminator[™] Heated LED Plow Lights

RapidLink[™] Attachment System

Mount and dismount the plow in a minute or less. See page 12 for details.



2" x 12" Angle Cylinder

Delivers greater angling force than standard cylinders.



Heavy Duty Lift Arm and Cylinder Lift arm with heavy duty 2" x 6"

Lift arm with heavy duty 2" x 6" lift cylinder and 35° travel provides exceptional snow stacking.





Hydraulically-Controlled Plows Specifically Designed for UTV Applications

Ideal for Sidewalks, Parks, and Campuses

STANDARD FEATURES

Weight Optimized for UTVs Get the power of a SnowDogg[®] professional plow that will fit most full-size UTVs.

Fast-Acting Hydraulic Power Unit Hydraulic angle, lift, and wing control for UTV plows.

304 Stainless Steel Moldboard & 3/8" Steel Cutting Edge An investment that will last.

Narrow Width at Angle Available at a minimum of 63" with blade at angle.

Full Trip (MUT) or Trip Edge (VUT) Design Feel confident, even when you can't see what's below the snow.

VUT SPECIFIC FEATURES

Double Acting Angle Cylinders Back drag with ease.

Flared Wings Throw snow powerfully.

Narrow Width at "V" position VUT65 has a 60" width in "V" position for narrow sidewalks.

INCLUDED ACCESSORIES

Wire Reinforced Blade Guides Controller Single hand operation.



Available Sizes VUT - 78" MUT - 72", 80"






Power Unit / Hydraulics Equipped with full size SAE cartridge valves, oversized rubber hoses, and integral valve manifold.



Angle Cylinders Standard 1-1/2" x 8" double acting angle cylinders allow for real back dragging.





STANDARD FEATURES

Universal Skid Steer Mount Easily mount to any skid steer.


Hydraulic Angle Cylinders Work with skid steers' existing hydraulic lines for responsive maneuverability.

Trip Edge Design To respond to hidden divots and obstacles.

304 Stainless Steel Moldboard & 1/2" Steel Cutting Edge An investment that will last.

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Wire Reinforced Blade Guides Cast Plow Shoes

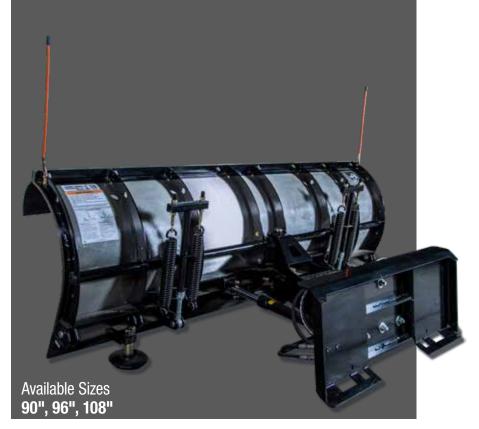



Trip Edge Design Provides smoother plowing over obstacles.



1-1/2" x 12" Angle Cylinders High angling force for handling heavy snow.



Optional Wings - Part No. | 16021310 Add a full 2' of width to your plow with the TE Series Plow Wing Kit.





Minimum Required Machine Weight of 5,500 lb / 2,500 lb Minimum Required Horsepower of 46 HP / 30 HP

STANDARD FEATURES

Durable Tuff-Kote™ Finish Corrosion resistant powder coat doubles the life of your pusher.

Dual 4" Channels Durable support where it's needed most.

AR400 Wear Shoes Abrasion resistant steel provides superior wear life.

Universal Quick-Coupler Attachment Versatile and easy attachment and removal.

Heavy Duty Precision-Rolled Moldboard Enhanced snow rolling for a better quality push.

SKID-STEER SERIES SPECIFIC FEATURES

Premium Rubber Compound Cutting Edge 1" x 8" cutting edge slices through snow and ice.

Extreme-Duty Wear Shoes

5" x 3/4" wear shoes are made of AR400 steel for far greater wear life.

COMPACT SERIES SPECIFIC FEATURES

Premium Rubber Compound Cutting Edge 1" x 6" cutting edge slices through snow and ice.

Extreme-Duty Wear Shoes

3" x 3/4" wear shoes are made of AR400 steel for far greater wear life.







SKID-STEER SERIES SPECIFIC FEATURES



Optional Back Drag Kits Include a 1" x 6" rubber cutting

edge mounted to a black powder coat steel frame & a set of 3/4" thick abrasion resistant steel wear shoes. Used to pull snow away from buildings, docks and other tight places. The kit is bolt-on & removable.

COMPACT SERIES SPECIFIC FEATURES





7 Ga Rolled Steel Moldboard with 5/16" thick side plates



Rubber Edge

3/8" x 3" rubber edge mounting bracket, 1" x 6" premium rubber edge, 5/8-11, grade 5 carriage bolts

10 Ga Rolled Steel Moldboard with 1/4" thick side plates



Minimum Required Machine Weight of 13,000 lb Minimum Required Horsepower of 100 HP

STANDARD FEATURES

Durable Tuff-Kote™ Finish Corrosion resistant powder coat doubles the life of your pusher.

Extreme Duty 12" H-Beam Design Dependable strength where it's needed most.

Inside Posts with 3/8" Side Plates Protect the equipment from impact damage.


Fully-Welded Lower Posts Keeps the post higher off the ground to prevent damage from roll back.

AR400 Wear Shoes Abrasion resistant steel provides superior wear life.

Premium Rubber Compound Cutting Edge 1-1/2" x 10" cutting edge slices through snow and ice.



Available Sizes 12', 14', 16', 18', 20'

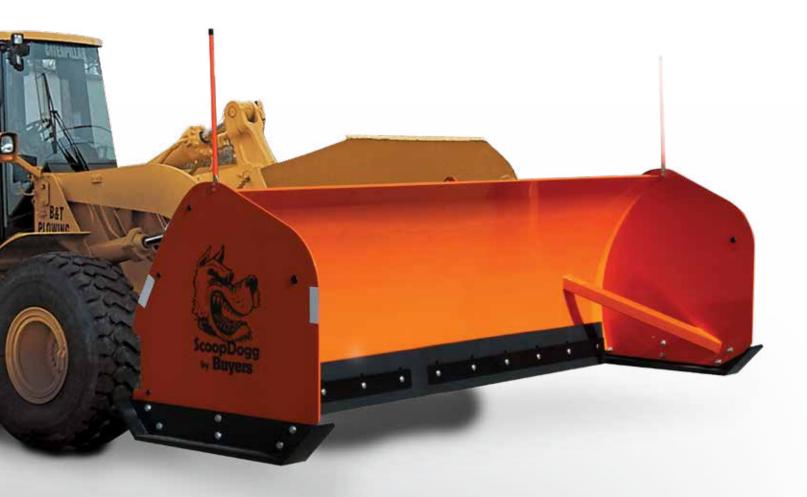

7 Ga Rolled Steel Moldboard with 3/8" thick side plates



Rubber Edge 3/8" x 4" rubber edge mounting bracket, 1-1/2" x 10" premium rubber edge, 5/8-11, grade 5 carriage bolts



Reinforced Support 4" x 4" 3/16" lower posts and 3" x 4" x 3/16" upper posts with 72" wide x 4.5" tall post spacing





Minimum Required Machine Weight of 12,000 lb Minimum Required Horsepower of 50 HP

STANDARD FEATURES

Durable Tuff-Kote™ Finish Corrosion resistant powder coat doubles the life of your pusher.

Extreme Duty 12" H-Beam Design Dependable strength where it's needed most.

Inside Posts with 3/8" Side Plates Protect the equipment from impact damage.

Fully-Welded Lower Posts Keeps the post higher off the ground to prevent damage from roll back.

AR400 Wear Shoes Abrasion resistant steel provides superior wear life.

Premium Rubber Compound Cutting Edge 1-1/2" x 10" cutting edge slices through snow and ice.







7 Ga Rolled Steel Moldboard with 3/8" thick side plates



Rubber Edge 3/8" x 4" rubber edge mounting bracket, 1-1/2" x 10" premium rubber edge, 5/8-11, grade 5 carriage bolts



Reinforced Support 4" x 4" 3/16" lower posts and 3" x 4" x 3/16" upper posts with 68" wide x 4.5" tall post spacing



FFICIAL SNOWDOGG[®] ACCESSORIES

Cutting Edges

Steel Cutting Edge

Part No.	Description
16120506	Cutting Edge, 72" x 1/4" (MUT60)
16120510	Cutting Edge, 80" x 3/8"
16120520	Cutting Edge, 90" x 3/8"
16120530	Cutting Edge, 96" x 3/8"
16120610	Cutting Edge, 90" x 1/2"
16120620	Cutting Edge, 96" x 1/2"
16120630	Cutting Edge, 102" x 1/2"
16120640	Cutting Edge, 108" x 1/2"
16120660	Cutting Edge, 108" x 5/8" (CM90)
16120662	Cutting Edge, 120" x 5/8"

Part No.	Description
16120664	Cutting Edge, 132" x 5/8" (CM110)
16120705	Cutting Edge, 80" Rubber
16120710	Cutting Edge, 90" Rubber
16120720	Cutting Edge, 96" Rubber
16120730	Cutting Edge, 102" Rubber
16120740	Cutting Edge, 108" Rubber
16120810	Cutting Edge, 34" x 3/8", VMD75
16120811	Cutting Edge, 34" x 1/2", VMD75
16120820	Cutting Edge, 40" x 1/2", VXF85
16120830	Cutting Edge, 46" x 1/2", VXF95

Rubber Deflectors



	Buyers	
	• • • • •	
D.	Description	Par
57	Deflector, 80" Rubber (MD80)	161
157	Deflector, 90" Rubber	16
159	Deflector, 96" Rubber	16

16120157	Deflector, 90" Rubber
16120159	Deflector, 96" Rubber
16120161	Deflector, 102" Rubber
16120163	Deflector, 108" Rubber
16120164	Deflector, 120" Rubber
16120165	Deflector, 132" Rubber (CM110)
16120171*	Deflector, VXF85, Rubber
16120173*	Deflector, VXF95, Rubber
16120180	VXF Rubber Kit
*V-nlows need tw	n deflectors

Back Drag Edges



Part No.	Description
16124010	Back Drag Edge, MD68
16124020	Back Drag Edge, 7.5' MD/HD/EX
16124030	Back Drag Edge, 8' MD/HD/EX
16124040	Back Drag Edge, 8.5' EX85
16124050	Back Drag Edge, 9' EX90

Rubber Cutting Edge

.

Part No.	Description
16120840	Center Cutting Edge, V-Plow DS
16120842	Center Cutting Edge, VUT DS
16120852	Center Cutting Edge, VUT PS
16120850	Center Cutting Edge, V-Plow PS
16120860	Cutting Edge, VUT
16120870	Cutting Edge, VXX105
16120920	Cutting Edge, 90" x 1/2", XP810
16120940	Wing Cutting Edge, XP810 DS
16120950	Wing Cutting Edge, XP810 PS

Maintenance



Part No.	Description
16109020	Emergency Kit for Straight Blade Plow
16109030	Emergency Kit for V-Plow
16150010	Hydraulic Fluid, 12 QTS Case

1									

Part No 161211

Illuminated LED Guides





1308124

Shown with Wire Harness

- · Patented light-up design makes it easier to see your equipment in low visibility conditions
- Includes wiring harness that is 12 ft per side with a pre-terminated male bullet connector and ring terminal to connect to the LED guides
- . Unique, eye-catching look helps your truck stand out from the competition
- · Easy wiring and installation that only requires a few basic tools
- Compatible with most snow plows and truck bumpers

Part No.	Description
1308124	24 Inch Illuminated LED Snow Plow Blade Guides
1308128	28 Inch Illuminated LED Snow Plow Blade Guides
1308136	36 Inch Illuminated LED Snow Plow Blade Guides
1308126	Horizontal Adapter Kit for 1/2" Base with Hardware (Required for SnowDogg plows with Illuminated LED Guides)













Our Corporate Family of Companies



Founded in 1946, Buyers Products is a fully integrated manufacturer and a leader in the truck equipment industry. Our engineering, manufacturing and assembly operations take place in the USA, under the Buyers family of companies. Buyers Products' mission is to improve our Customers' profitability and productivity while enhancing the quality of our products and services.



Our History

Buyers Products Company founded by Sam Ruven and Bessie Kleinman as a distributor of driveline components.

^в∕__1946

lacom

1992 Buyers acquired Trailer Components Manufacturing (Tracom) for CNC precision machining and tooling, as well as state-of-the-art welding.

2002 Buyers moved its corporate headquarters to a brand new 235,000 sq. ft. state-of-the-art office and distribution center.

Buyers

Romorech 2004 Buyers acquired **Romotech in New Paris** Indiana. Our Ferry Industries Rotospeed molding machines are used to manufacture our poly salt spreaders.

2007 Buyers began manufacturing the SnowDogg stainless steel snowplow at our Mentor, Ohio facility.

2009 Buyers began our operations at Boomerang Rubber, in Botkins, Ohio manufacturing mudflaps, wheel chocks and other rubber truck and trailer accessories


Buyers

2013 Buyers acquired an additional 500,000 sq.ft. manufacturing facility in Mentor, Ohio allowing for expansion of our aluminum and stainless steel manufacturing

SaltDogg

ALL YOUR WORK

2017 Buyers launches new website with business partner portal, to make online ordering and account maintenance easy for customers.



Buyers

22,000 sq ft Engineering Tech Center in Mentor, Ohio. It's multi-use lab, design, training and prototyping space is dedicated to the research and devicement of and development of innovative product.



2021 Buyers adds almost 300,000 sq ft of additional, state-of-the-art warehouse and office space to maintain the quick turnaround and competitive value their customers expect.

Buyers

PROGRESSIVE

1995 Buyers acquired Progressive Powder Coating. Our Nordson automatic powder application booth is powder application booth is used to powder coat our Buyers toolboxes and other truck and trailer accessories

Buyers continued to grow its product offerings and build valued relationships with customers and suppliers. Increased demand for products led to the pursuit of supply chain manufacturing solutions.







Romotech Rotational Molding Technologies, Inc.





www.buyersproducts.com











LITPLOW_H

FREIGHT NOT **INCLUDED IN** PRICE OF UNIT. FREIGHT WILL **BE BILLED UPON** PURCHASE.